

Introduction to Formal Methods

Chapter 11: Timed and Hybrid Systems

Roberto Sebastiani

DISI, Università di Trento, Italy – roberto.sebastiani@unitn.it

URL: <http://disi.unitn.it/rseba/DIDATTICA/fm2020/>

Teaching assistant: Enrico Magnago – enrico.magnago@unitn.it

CDLM in Informatica, academic year 2019-2020

last update: Sunday 24th May, 2020, 20:09

Copyright notice: *some material (text, figures) displayed in these slides is courtesy of R. Alur, M. Benerecetti, A. Cimatti, M. Di Natale, P. Pandya, M. Pistore, M. Roveri, and S. Tonetta, who detain its copyright. Some examples displayed in these slides are taken from [Clarke, Grunberg & Peled, "Model Checking", MIT Press], and their copyright is detained by the authors. All the other material is copyrighted by Roberto Sebastiani. Every commercial use of this material is strictly forbidden by the copyright laws without the authorization of the authors. No copy of these slides can be displayed in public without containing this copyright notice.*

Outline

- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises

Outline

- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises

Acknowledgments

Thanks for providing material to:

- **Rajeev Alur** & colleagues (Penn University)
- Paritosh Pandya (IIT Bombay)
- Andrea Mattioli, Yusi Ramadian (Univ. Trento)
- Marco Di Natale (Scuola Superiore S.Anna, Italy)

Acknowledgments

Thanks for providing material to:


- **Rajeev Alur** & colleagues (Penn University)
- Paritosh Pandya (IIT Bombay)
- Andrea Mattioli, Yusi Ramadian (Univ. Trento)
- Marco Di Natale (Scuola Superiore S.Anna, Italy)

Disclaimer

- very introductory
- very-partial coverage
- mostly computer-science centric

Hybrid Modeling

Hybrid machines = State machines + Dynamic Systems

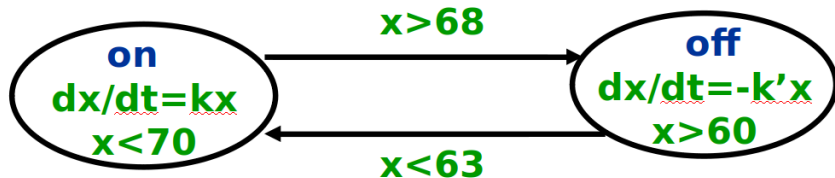

Hybrid Modeling: Examples

- Automotive Applications



Hybrid Modeling: Examples

- Automotive Applications
- Vehicle Coordination Protocols




Hybrid Modeling: Examples

- Automotive Applications
- Vehicle Coordination Protocols
- Interacting Autonomous Robots



Hybrid Modeling: Examples

- Automotive Applications
- Vehicle Coordination Protocols
- Interacting Autonomous Robots
- Bio-molecular Regulatory Networks

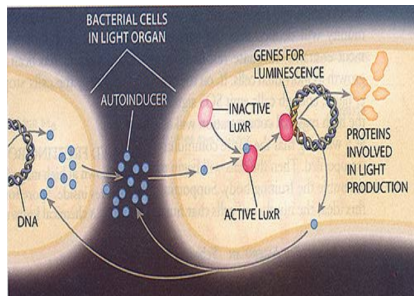

Outline

- 1 Motivations
- 2 Timed systems: Modeling and Semantics**
 - Timed automata
- 3 Symbolic Reachability for Timed Systems
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises


Outline

- 1 Motivations
- 2 **Timed systems: Modeling and Semantics**
 - **Timed automata**
- 3 Symbolic Reachability for Timed Systems
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises

Timed Automata



Example: Simple light control

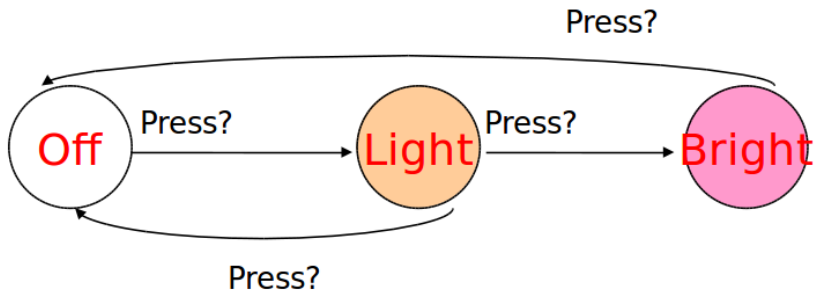


Requirement:

- if Off and press is issued once, then the light switches on;
- if Off and press is issued twice quickly, then the light gets brighter;
- if Light/Bright and press is issued once, then the light switches off;

⇒ cannot be achieved with standard automata

Example: Simple light control

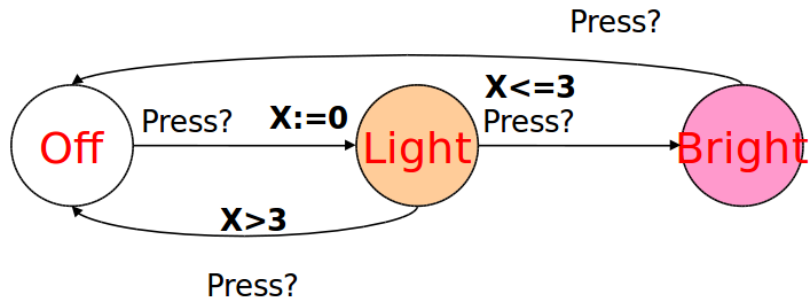



Solution: add real-valued clock x

- x reset at first press
- if next press before x reaches 3 time units, then the light will get brighter;
- otherwise the light is turned off

Modeling: timing constraints

Finite graph + finite set of (real-valued) **clocks**


- Vertexes are **locations**
 - Time can elapse there
 - Constraints (invariants)
- Edges are **switches**
 - Subject to constraints
 - Reset clocks

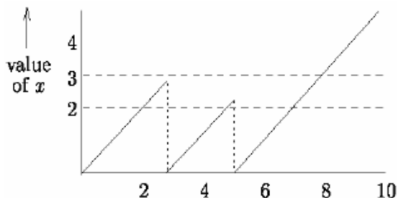

Meaning of clock value: time elapsed since the last time it was reset.


Timed Automata

- **Locations** l_1, l_2, \dots (like in standard automata)
 - discrete part of the state
 - may be implemented by discrete variables
- **Switches** (discrete transitions like in standard aut.)
- **Labels**, aka events, actions, ... (like in standard aut.)
 - used for synchronization

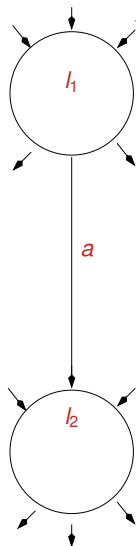


Timed Automata

- Locations l_1, l_2, \dots (like in standard automata)
 - discrete part of the state
 - may be implemented by discrete variables
- Switches (discrete transitions like in standard aut.)
- Labels, aka events, actions, ... (like in standard aut.)
 - used for synchronization
- **Clocks:** $x, y, \dots \in \mathbb{Q}^+$
 - value: time elapsed since the last time it was reset
- **Guards:** $(x \bowtie C)$ s.t. $\bowtie \in \{\leq, <, \geq, >\}$, $C \in \mathbb{N}$
 - set of clock comparisons against integers bounds
 - constrain the execution of the switch
- **Resets** $(x := 0)$
 - set of clock assignments to 0

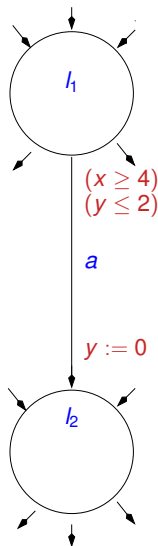


Timed Automata

- Locations l_1, l_2, \dots (like in standard automata)
 - discrete part of the state
 - may be implemented by discrete variables
- Switches (discrete transitions like in standard aut.)
- Labels, aka events, actions, ... (like in standard aut.)
 - used for synchronization
- Clocks: $x, y, \dots \in \mathbb{Q}^+$
 - value: time elapsed since the last time it was reset
- Guards: $(x \bowtie C)$ s.t. $\bowtie \in \{\leq, <, \geq, >\}$, $C \in \mathbb{N}$
 - set of clock comparisons against integers bounds
 - constrain the execution of the switch
- Resets $(x := 0)$
 - set of clock assignments to 0
- **Invariants:** $(x \bowtie C)$ s.t. $\bowtie \in \{\leq, <, \geq, >\}$, $C \in \mathbb{N}$
 - set of clock comparisons against integers bounds
 - ensure progress

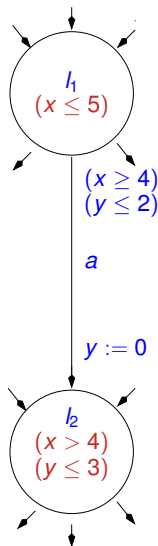


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$

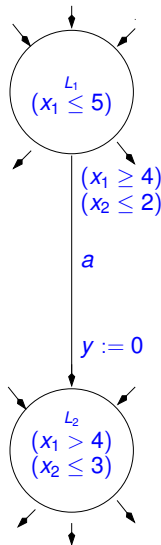


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$:

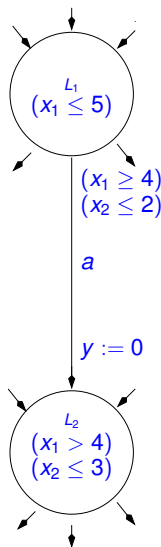


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!

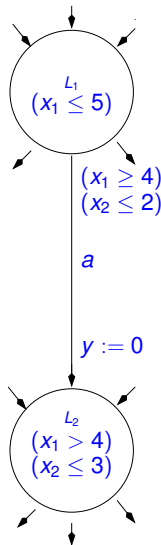


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$:

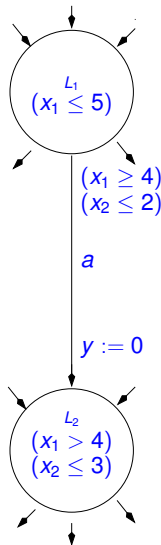


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)

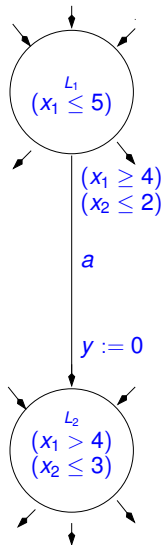


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$

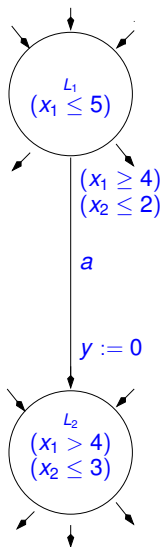


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$:

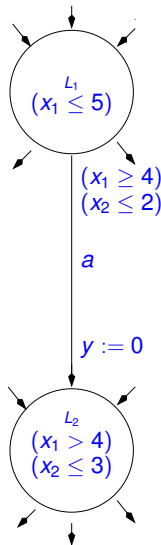


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!

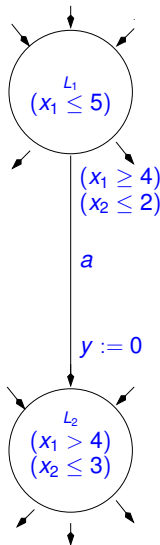


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$:

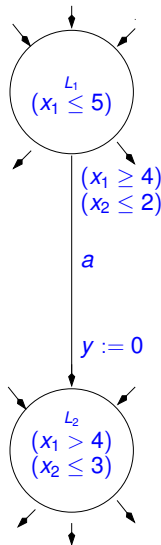


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)

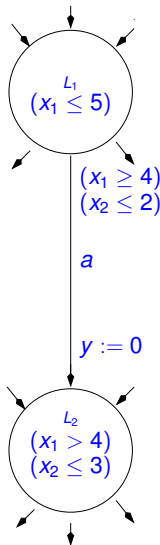


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$:

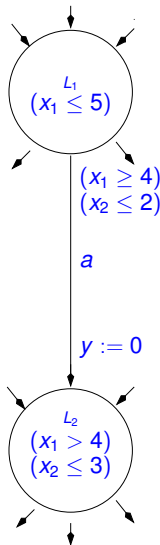


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$: **not OK!** (violates guard)

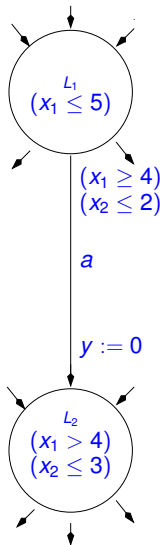


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$: **not OK!** (violates guard)
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 2 \rangle$:

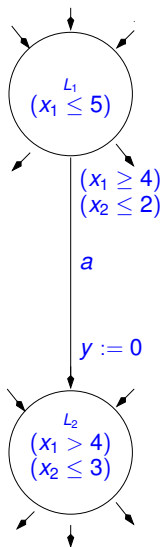


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$: **not OK!** (violates guard)
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 2 \rangle$: **not OK!** (violates reset)

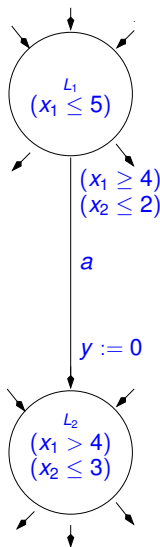


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$: **not OK!** (violates guard)
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 2 \rangle$: **not OK!** (violates reset)
 - $\langle l_1, 4, 2 \rangle \xrightarrow{a} \langle l_2, 4, 0 \rangle$:

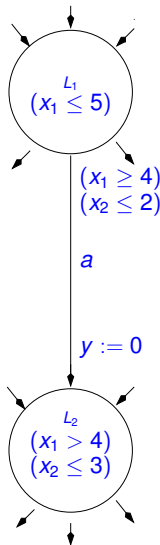


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$: **not OK!** (violates guard)
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 2 \rangle$: **not OK!** (violates reset)
 - $\langle l_1, 4, 2 \rangle \xrightarrow{a} \langle l_2, 4, 0 \rangle$: **not OK!** (violates invar. in l_2)

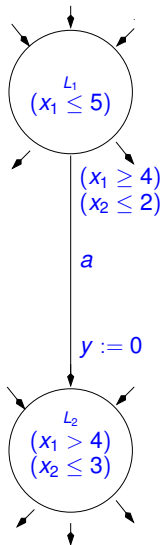


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$: **not OK!** (violates guard)
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 2 \rangle$: **not OK!** (violates reset)
 - $\langle l_1, 4, 2 \rangle \xrightarrow{a} \langle l_2, 4, 0 \rangle$: **not OK!** (violates invar. in l_2)
- Wait (time elapse): $\langle l_i, x, y \rangle \xrightarrow{\delta} \langle l_i, x + \delta, y + \delta \rangle$

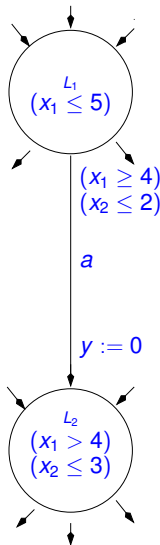


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$: **not OK!** (violates guard)
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 2 \rangle$: **not OK!** (violates reset)
 - $\langle l_1, 4, 2 \rangle \xrightarrow{a} \langle l_2, 4, 0 \rangle$: **not OK!** (violates invar. in l_2)
- Wait (time elapse): $\langle l_i, x, y \rangle \xrightarrow{\delta} \langle l_i, x + \delta, y + \delta \rangle$
 - $\langle l_1, 3, 0 \rangle \xrightarrow{2} \langle l_1, 5, 2 \rangle$:

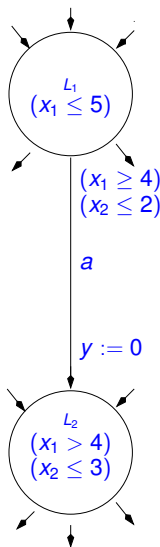


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$: **not OK!** (violates guard)
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 2 \rangle$: **not OK!** (violates reset)
 - $\langle l_1, 4, 2 \rangle \xrightarrow{a} \langle l_2, 4, 0 \rangle$: **not OK!** (violates invar. in l_2)
- Wait (time elapse): $\langle l_i, x, y \rangle \xrightarrow{\delta} \langle l_i, x + \delta, y + \delta \rangle$
 - $\langle l_1, 3, 0 \rangle \xrightarrow{2} \langle l_1, 5, 2 \rangle$: OK!

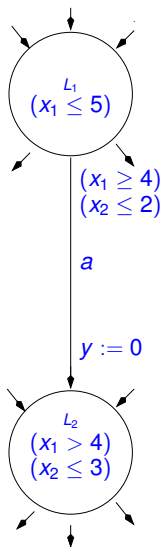


Timed Automata: States and Transitions

- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$: **not OK!** (violates guard)
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 2 \rangle$: **not OK!** (violates reset)
 - $\langle l_1, 4, 2 \rangle \xrightarrow{a} \langle l_2, 4, 0 \rangle$: **not OK!** (violates invar. in l_2)
- Wait (time elapse): $\langle l_i, x, y \rangle \xrightarrow{\delta} \langle l_i, x + \delta, y + \delta \rangle$
 - $\langle l_1, 3, 0 \rangle \xrightarrow{2} \langle l_1, 5, 2 \rangle$: OK!
 - $\langle l_1, 3, 0 \rangle \xrightarrow{3} \langle l_1, 6, 3 \rangle$:

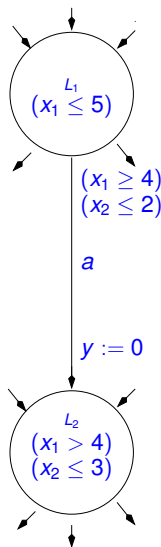

Timed Automata: States and Transitions


- State: $\langle l_i, x_1, x_2 \rangle$
 - $\langle l_1, 4, 7 \rangle$: OK!
 - $\langle l_2, 2, 4 \rangle$: **not OK!** (violates invariant in l_2)
- Switch: $\langle l_i, x, y \rangle \xrightarrow{a} \langle l_j, x', y' \rangle$
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 0 \rangle$: OK!
 - $\langle l_1, 6, 2 \rangle \xrightarrow{a} \langle l_2, 6, 0 \rangle$: **not OK!** (violates invar. in l_1)
 - $\langle l_1, 3, 2 \rangle \xrightarrow{a} \langle l_2, 3, 0 \rangle$: **not OK!** (violates guard)
 - $\langle l_1, 4.5, 2 \rangle \xrightarrow{a} \langle l_2, 4.5, 2 \rangle$: **not OK!** (violates reset)
 - $\langle l_1, 4, 2 \rangle \xrightarrow{a} \langle l_2, 4, 0 \rangle$: **not OK!** (violates invar. in l_2)
- Wait (time elapse): $\langle l_i, x, y \rangle \xrightarrow{\delta} \langle l_i, x + \delta, y + \delta \rangle$
 - $\langle l_1, 3, 0 \rangle \xrightarrow{2} \langle l_1, 5, 2 \rangle$: OK!
 - $\langle l_1, 3, 0 \rangle \xrightarrow{3} \langle l_1, 6, 3 \rangle$: **not OK!** (violates invar. in l_1)

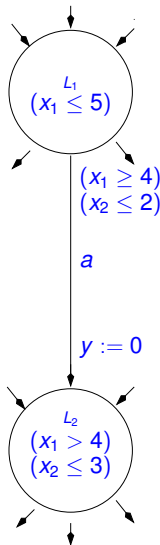

Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$


- L : Set of locations

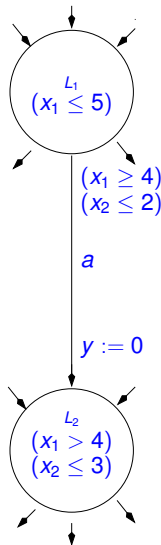

Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$


- L : Set of locations
- $L^0 \subseteq L$: Set of initial locations

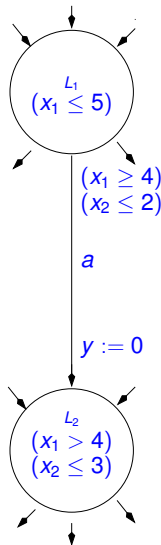

Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$


- L : Set of locations
- $L^0 \subseteq L$: Set of initial locations
- Σ : Set of labels

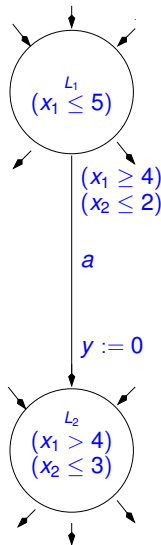

Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$


- L : Set of locations
- $L^0 \subseteq L$: Set of initial locations
- Σ : Set of labels
- X : Set of clocks

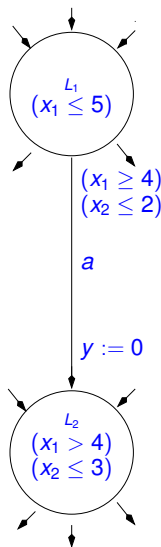

Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$


- L : Set of locations
- $L^0 \subseteq L$: Set of initial locations
- Σ : Set of labels
- X : Set of clocks
- $\Phi(X)$: Set of invariants

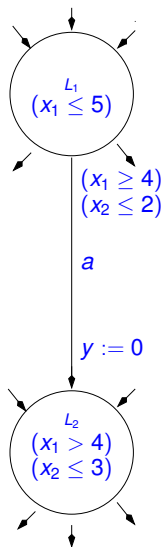

Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$


- L : Set of locations
- $L^0 \subseteq L$: Set of initial locations
- Σ : Set of labels
- X : Set of clocks
- $\Phi(X)$: Set of invariants
- $E \subseteq L \times \Sigma \times \Phi(X) \times 2^X \times L$: Set of switches
A switch $\langle l, a, \varphi, \lambda, l' \rangle$ s.t.

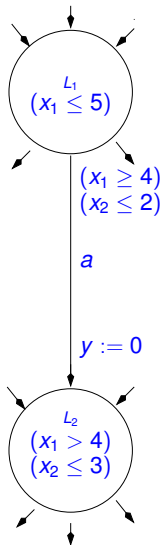

Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$

- L : Set of locations
- $L^0 \subseteq L$: Set of initial locations
- Σ : Set of labels
- X : Set of clocks
- $\Phi(X)$: Set of invariants
- $E \subseteq L \times \Sigma \times \Phi(X) \times 2^X \times L$: Set of switches
A switch $\langle l, a, \varphi, \lambda, l' \rangle$ s.t.
 - l : source location

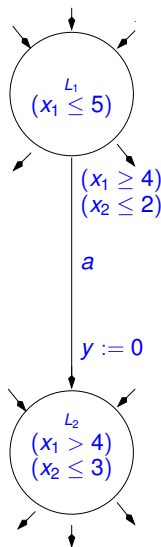


Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$

- L : Set of locations
- $L^0 \subseteq L$: Set of initial locations
- Σ : Set of labels
- X : Set of clocks
- $\Phi(X)$: Set of invariants
- $E \subseteq L \times \Sigma \times \Phi(X) \times 2^X \times L$: Set of switches

A switch $\langle l, a, \varphi, \lambda, l' \rangle$ s.t.

- l : source location
- a : label

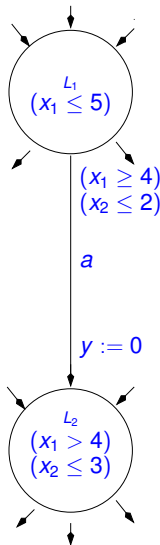


Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$

- L : Set of locations
- $L^0 \subseteq L$: Set of initial locations
- Σ : Set of labels
- X : Set of clocks
- $\Phi(X)$: Set of invariants
- $E \subseteq L \times \Sigma \times \Phi(X) \times 2^X \times L$: Set of switches

A switch $\langle l, a, \varphi, \lambda, l' \rangle$ s.t.

- l : source location
- a : label
- φ : clock constraints

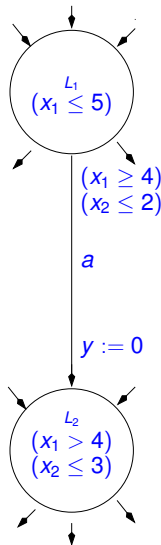


Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$

- L : Set of locations
- $L^0 \subseteq L$: Set of initial locations
- Σ : Set of labels
- X : Set of clocks
- $\Phi(X)$: Set of invariants
- $E \subseteq L \times \Sigma \times \Phi(X) \times 2^X \times L$: Set of switches

A switch $\langle l, a, \varphi, \lambda, l' \rangle$ s.t.

- l : source location
- a : label
- φ : clock constraints
- $\lambda \subseteq X$: clocks to be reset

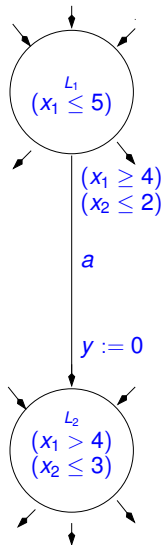


Timed Automata: Formal Syntax

Timed Automaton $\langle L, L^0, \Sigma, X, \Phi(X), E \rangle$

- L : Set of locations
- $L^0 \subseteq L$: Set of initial locations
- Σ : Set of labels
- X : Set of clocks
- $\Phi(X)$: Set of invariants
- $E \subseteq L \times \Sigma \times \Phi(X) \times 2^X \times L$: Set of switches

A switch $\langle l, a, \varphi, \lambda, l' \rangle$ s.t.

- l : source location
- a : label
- φ : clock constraints
- $\lambda \subseteq X$: clocks to be reset
- l' : target location

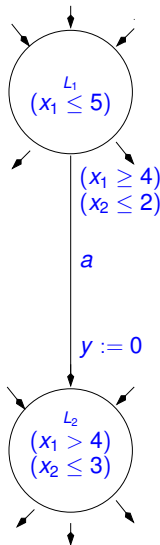


Clock constraints and clock interpretations

- Grammar of clock constraints:

$$\varphi ::= x \leq C \mid x < C \mid x \geq C \mid x > C \mid \varphi \wedge \varphi$$

s.t. C positive integer values.

\implies allow only comparison of a clock with a constant

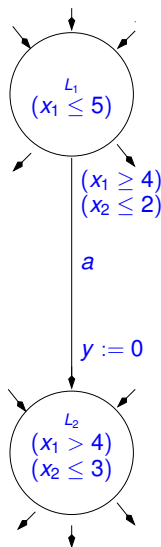

Clock constraints and clock interpretations

- Grammar of clock constraints:


$$\varphi ::= x \leq C \mid x < C \mid x \geq C \mid x > C \mid \varphi \wedge \varphi$$

s.t. C positive integer values.

\implies allow only comparison of a clock with a constant

- clock interpretation: ν

$$X = \langle x, y, z \rangle, \quad \nu = \langle 1.0, 1.5, 0 \rangle$$

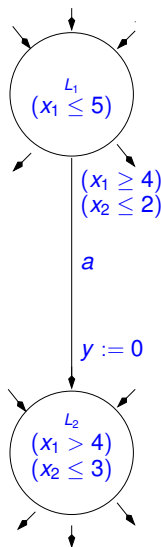

Clock constraints and clock interpretations

- Grammar of clock constraints:

$$\varphi ::= x \leq C \mid x < C \mid x \geq C \mid x > C \mid \varphi \wedge \varphi$$

s.t. C positive integer values.


\implies allow only comparison of a clock with a constant

- clock interpretation: ν

$$X = \langle x, y, z \rangle, \quad \nu = \langle 1.0, 1.5, 0 \rangle$$

- clock interpretation ν after δ time: $\nu + \delta$

$$\delta = 0.2, \quad \nu + \delta = \langle 1.2, 1.7, 0.2 \rangle$$

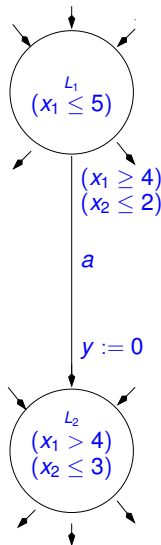

Clock constraints and clock interpretations

- Grammar of clock constraints:

$$\varphi ::= x \leq C \mid x < C \mid x \geq C \mid x > C \mid \varphi \wedge \varphi$$

s.t. C positive integer values.

\implies allow only comparison of a clock with a constant

- clock interpretation: ν


$$X = \langle x, y, z \rangle, \quad \nu = \langle 1.0, 1.5, 0 \rangle$$

- clock interpretation ν after δ time: $\nu + \delta$

$$\delta = 0.2, \quad \nu + \delta = \langle 1.2, 1.7, 0.2 \rangle$$

- clock interpretation ν after reset λ : $\nu[\lambda]$

$$\lambda = \{y\}, \quad \nu[y := 0] = \langle 1.0, 0, 0 \rangle$$

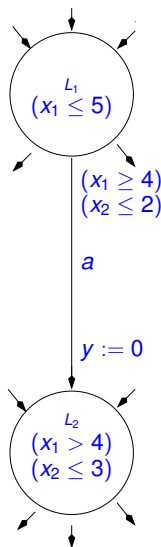

Clock constraints and clock interpretations

- Grammar of clock constraints:

$$\varphi ::= x \leq C \mid x < C \mid x \geq C \mid x > C \mid \varphi \wedge \varphi$$

s.t. C positive integer values.

\implies allow only comparison of a clock with a constant

- clock interpretation: ν

$$X = \langle x, y, z \rangle, \quad \nu = \langle 1.0, 1.5, 0 \rangle$$


- clock interpretation ν after δ time: $\nu + \delta$

$$\delta = 0.2, \quad \nu + \delta = \langle 1.2, 1.7, 0.2 \rangle$$

- clock interpretation ν after reset λ : $\nu[\lambda]$

$$\lambda = \{y\}, \quad \nu[y := 0] = \langle 1.0, 0, 0 \rangle$$

A **state** for a timed automaton is a pair $\langle l, \nu \rangle$, where l is a location and ν is a clock interpretation

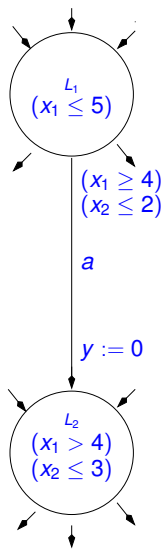

Remark: why integer constants in clock constraints?


The constant in clock constraints are assumed to be **integer** w.l.o.g.:

- if rationals, multiply them for their greatest common denominator, and change the time unit accordingly
- in practice, multiply by 10^k (resp 2^k), k being the number of precision digits (resp. bits), and change the time unit accordingly

Ex: 1.345, 0.78, 102.32 seconds


⇒ 1,345, 780, 102,320 milliseconds

Example

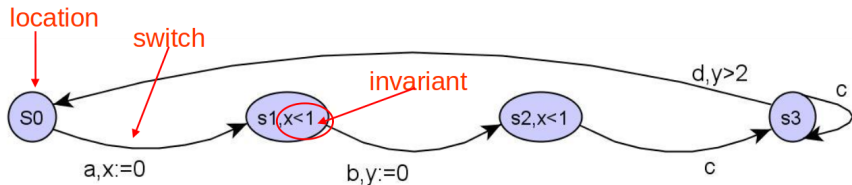


- clocks $\{x, y\}$ can be set/reset independently

Example

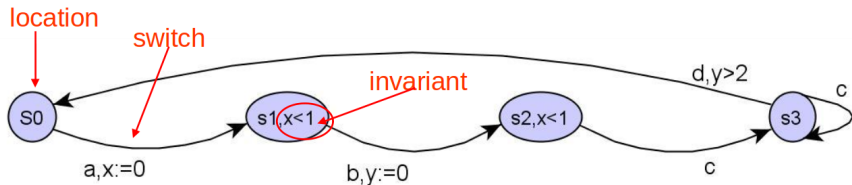


- clocks $\{x, y\}$ can be set/reset independently
- x is reset to 0 from s_0 to s_1 on a

Example

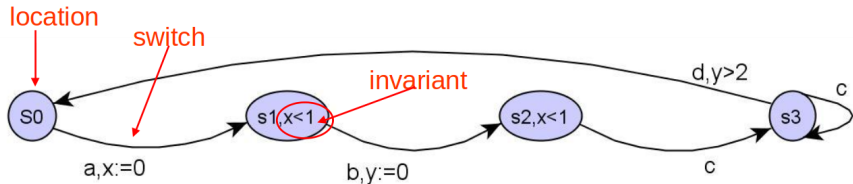


- clocks $\{x, y\}$ can be set/reset independently
- x is reset to 0 from s_0 to s_1 on a
- switches b and c happen within 1 time-unit from a because of constraints in s_1 and s_2

Example

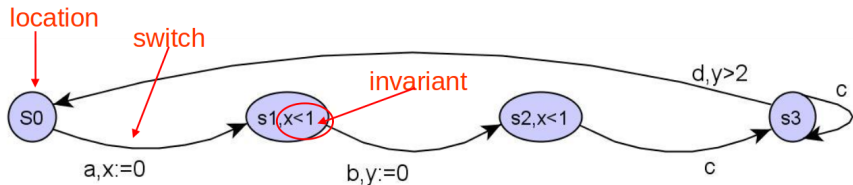

- clocks $\{x, y\}$ can be set/reset independently
- x is reset to 0 from s_0 to s_1 on a
- switches b and c happen within 1 time-unit from a because of constraints in s_1 and s_2
- delay between b and the following d is > 2

Example

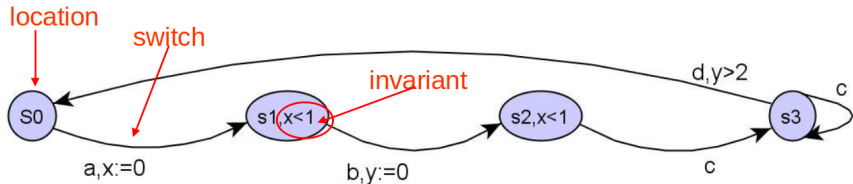

- clocks $\{x, y\}$ can be set/reset independently
- x is reset to 0 from s_0 to s_1 on a
- switches b and c happen within 1 time-unit from a because of constraints in s_1 and s_2
- delay between b and the following d is > 2
- no explicit bounds on time difference between event $c - d$


Timed Automata: Semantics

Semantics of A defined in terms of a (infinite) transition system

$$S_A \stackrel{\text{def}}{=} \langle Q, Q^0, \rightarrow, \Sigma \rangle$$

- Q : $\{\langle l, \nu \rangle\}$ s.t. l location and ν clock evaluation
- Q^0 : $\{\langle l, \nu \rangle\}$ s.t. $l \in L^0$ location and $\nu(X) = 0$
- \rightarrow :
 - state change due to location switch
 - state change due to time elapse
- Σ : set of labels of $\Sigma \cup \mathbb{Q}^+$


State change in transition system

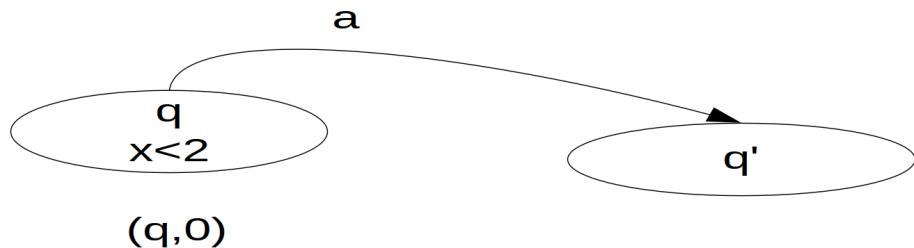

Initial State

- $\langle q, 0 \rangle$
- Initial state


State change in transition system

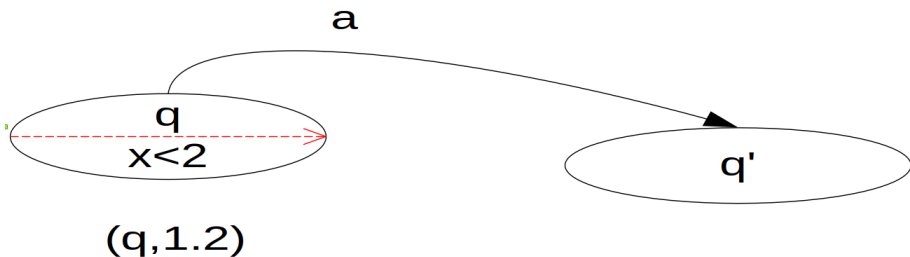

Time elapse

- $\langle q, 0 \rangle \xrightarrow{1.2} \langle q, 1.2 \rangle$
- state change due to elapse of time


State change in transition system

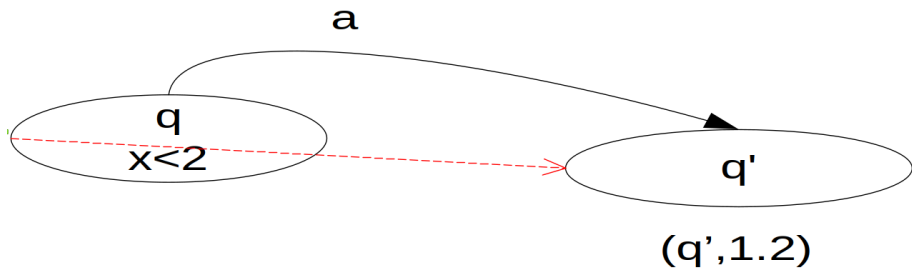

Time Elapse, Switch

- $\langle q, 0 \rangle \xrightarrow{1.2} \langle q, 1.2 \rangle \xrightarrow{a} \langle q', 1.2 \rangle$ "wait δ ; switch;"


State change in transition system

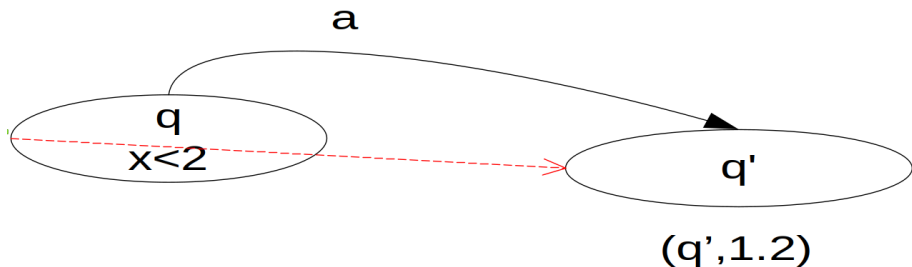

Time Elapse, Switch and their Concatenation


- $\langle q, 0 \rangle \xrightarrow{1.2} \langle q, 1.2 \rangle \xrightarrow{a} \langle q', 1.2 \rangle$ "wait δ ; switch;"
- $\Rightarrow \langle q, 0 \rangle \xrightarrow{1.2+a} \langle q', 1.2 \rangle$ "wait δ and switch;"

Example

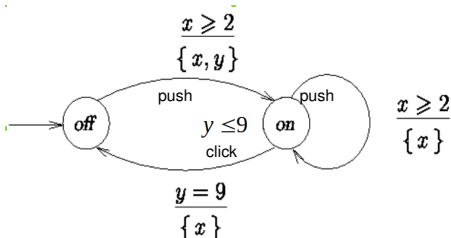

- Switch may be turned on whenever at least 2 time units has elapsed since last “turn off”
- Light automatically switches off after 9 time units.

Example

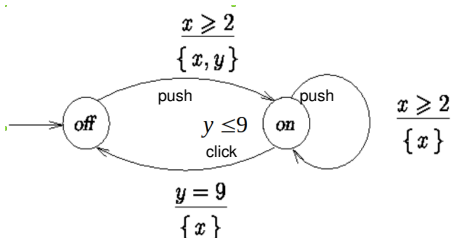

- Switch may be turned on whenever at least 2 time units has elapsed since last “turn off”
- Light automatically switches off after 9 time units.


Example execution

$\langle \text{off}, 0, 0 \rangle \xrightarrow{3.5} \langle \text{off}, 3.5, 3.5 \rangle \xrightarrow{\text{push}} \langle \text{on}, 0, 0 \rangle \xrightarrow{3.14} \langle \text{on}, 3.14, 3.14 \rangle \xrightarrow{\text{push}}$
 $\langle \text{on}, 0, 3.14 \rangle \xrightarrow{3} \langle \text{on}, 3, 6.14 \rangle \xrightarrow{2.86} \langle \text{on}, 5.86, 9 \rangle \xrightarrow{\text{click}} \langle \text{on}, 0, 9 \rangle$

Remark: Non-Zenoness

Beware of Zeno! (paradox)

- When the invariant is violated some edge must be enabled
- Automata should admit the possibility of time to diverge




Combination of Timed Automata

- Complex system = product of interacting systems
- Let $A_1 \stackrel{\text{def}}{=} \langle L_1, L_1^0, \Sigma_1, X_1, \Phi_1(X_1), E_1 \rangle$,
 $A_2 \stackrel{\text{def}}{=} \langle L_2, L_2^0, \Sigma_2, X_2, \Phi_2(X_2), E_2 \rangle$
- Product: $A_1 || A_2 \stackrel{\text{def}}{=} \langle L_1 \times L_2, L_1^0 \times L_2^0, \Sigma_1 \cup \Sigma_2, X_1 \cup X_2, \Phi_1(X_1) \cup \Phi_2(X_2), E_1 || E_2 \rangle$
- Transition iff:
 - Label a belongs to both alphabets \implies **synchronized blocking synchronization**: a -labeled switches cannot be shot alone
 - Label a only in the alphabet of $A_1 \implies$ **asynchronized**
 - Label a only in the alphabet of $A_2 \implies$ **asynchronized**



Transition Product

$$\Sigma_1 \stackrel{\text{def}}{=} \{a, b\}$$


$$\Sigma_2 \stackrel{\text{def}}{=} \{a, c\}$$

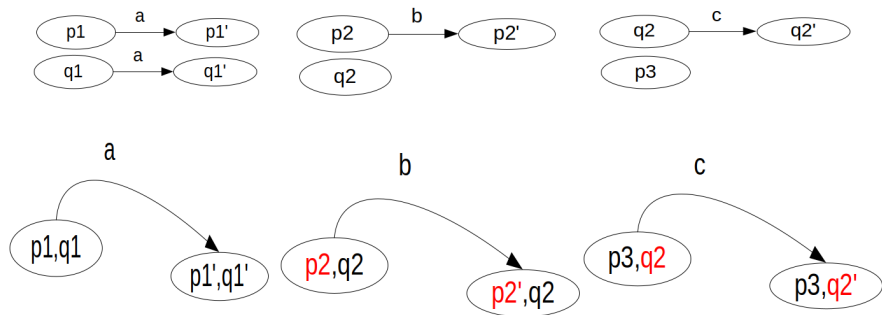

Transition Product: Example

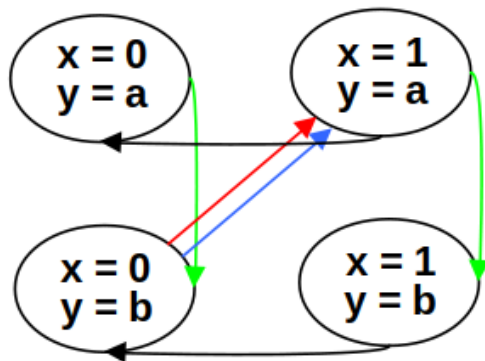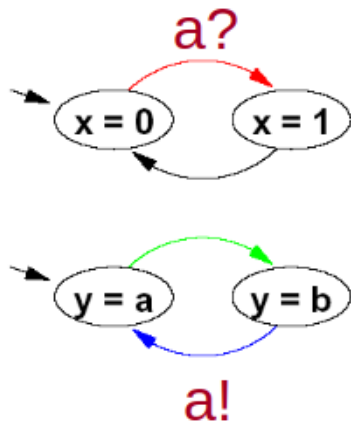


Example: Train-gate controller [Alur CAV'99]

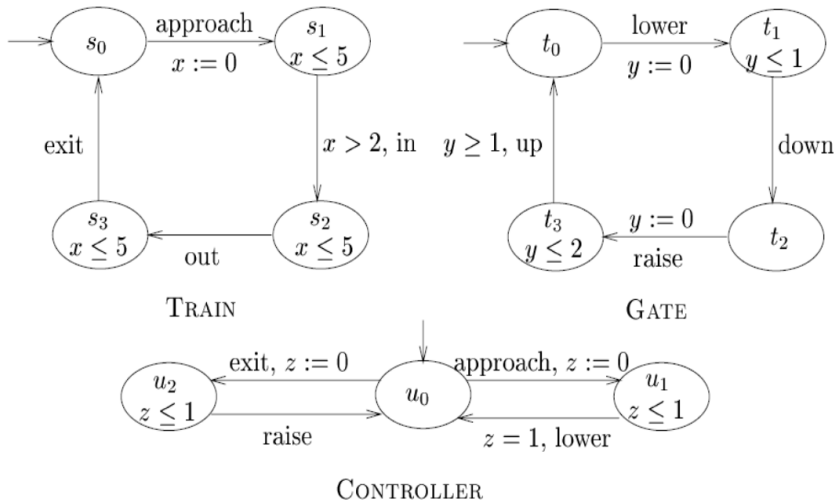

Desired property: $G(s_2 \rightarrow t_2)$

Train-gate controller: Product

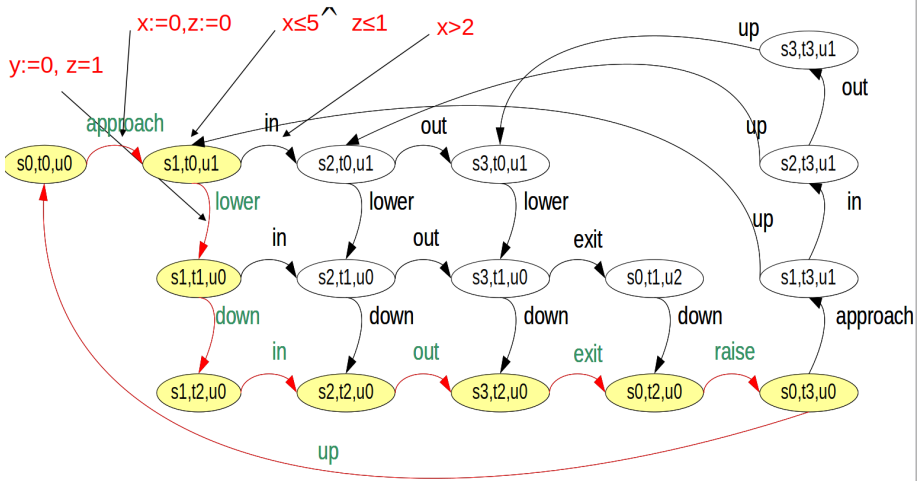

Outline

- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems**
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises

Outline

- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems**
 - Making the state space finite**
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises

Reachability Analysis


- Verification of safety requirement: reachability problem
- Input: a timed automaton A and a set of **target locations** $L^F \subseteq L$
- Problem: Determining whether L^F is reachable in a timed automaton A
- A location l of A is reachable if some state q with location component l is a reachable state of the transition system S_A

Timed/hybrid Systems: problem


Problem

The system S_A associated to A has infinitely-many states & symbols.

- Is finite state analysis possible?
- Is reachability problem decidable?




gives rise to the
infinite transition system:

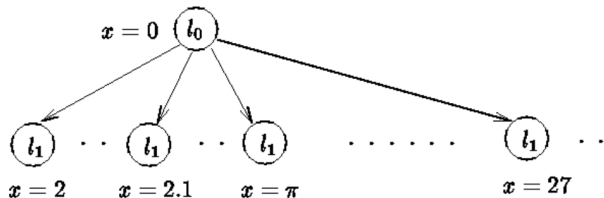


Idea: Finite Partitioning

Goal

Partition the state space into finitely-many **equivalence classes**, so that equivalent states exhibit (bi)similar behaviors

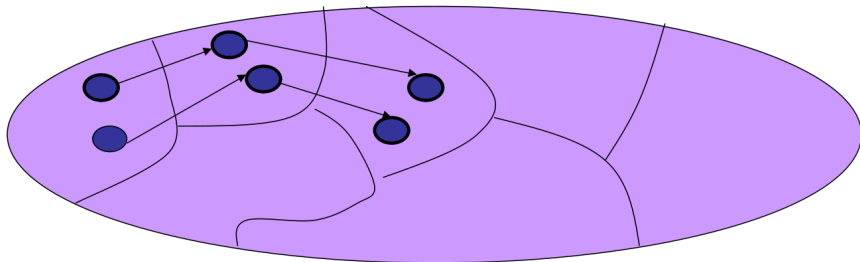

Reachability analysis

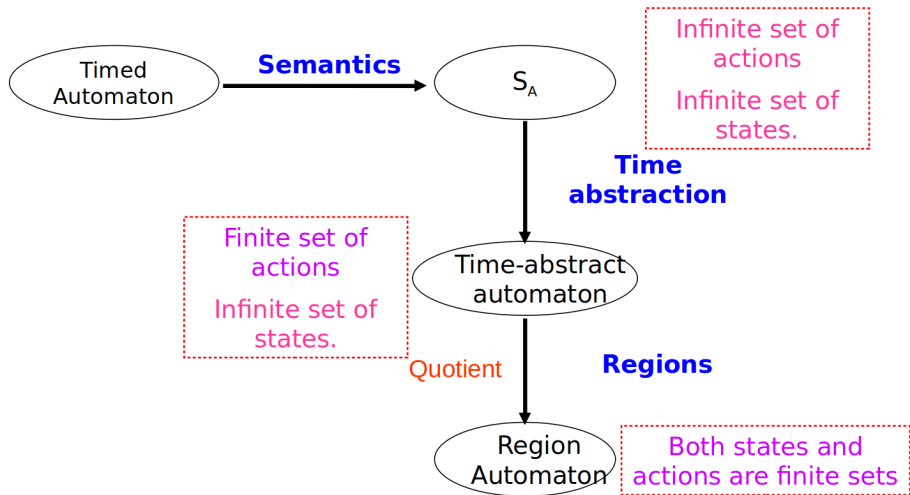

Timed Vs Time-Abstract Relations

Idea

Infinite transition system associated with a timed/hybrid automaton A :

- S_A : Labels on continuous steps are delays in \mathbb{Q}^+
- U_A (time-abstract): actual delays are suppressed
 \implies all continuous steps have same label
- from "wait δ and switch" to "wait (sometime) and switch"

Time-abstract transition system U_A

U_A (time-abstract): actual delays are suppressed

- Only change due to location switch stated explicitly
- Cut system to finitely many labels
- U_A (instead of S_A) allows for capturing untimed properties (e.g., reachability, safety)

Time-abstract transition system U_A

U_A (time-abstract): actual delays are suppressed

- Only change due to location switch stated explicitly
- Cut system to finitely many labels
- U_A (instead of S_A) allows for capturing untimed properties (e.g., reachability, safety)

A : (“wait δ ; switch;”)

$$\langle l_0, 0, 0 \rangle \xrightarrow{1.2} \langle l_0, 1.2, 1.2 \rangle \xrightarrow{a} \langle l_1, 0, 1.2 \rangle \xrightarrow{0.7} \langle l_1, 0.7, 1.9 \rangle \xrightarrow{b} \langle l_2, 0.7, 0 \rangle$$


S_A : (“wait δ and switch;”)

$$\langle l_0, 0, 0 \rangle \xrightarrow{1.2+a} \langle l_1, 0, 1.2 \rangle \xrightarrow{0.7+b} \langle l_2, 0.7, 0 \rangle$$

U_A : (“wait (sometime) and switch;”)

$$\langle l_0, 0, 0 \rangle \xrightarrow{a} \langle l_1, 0, 1.2 \rangle \xrightarrow{b} \langle l_2, 0.7, 0 \rangle$$


Stable quotients

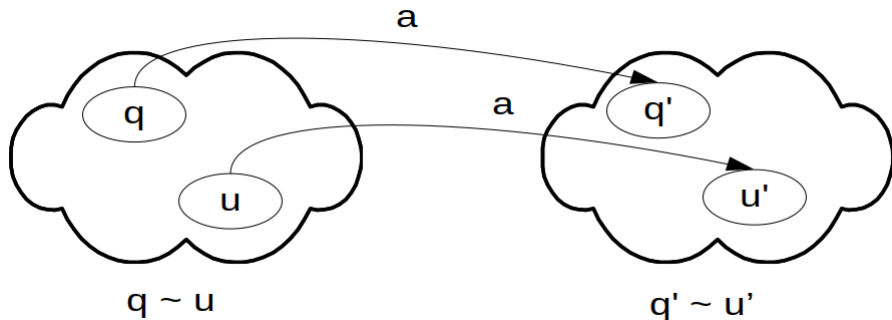

Idea: Collapse states which are equivalent modulo “wait & switch”

- Cut to finitely many states
- Stable equivalence relation
- Quotient of $U_A =$ transition system $[U_A]$

L^F -sensitive equivalence relation

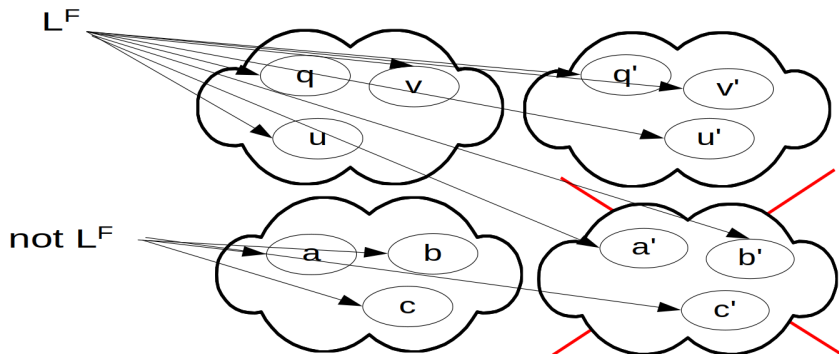

All equivalent states in a class belong to either L^F or not L^F

- E.g.: states with different labels cannot be equivalent

Stable Quotient: Intuitive example

Task: plan trip from DISI to VR train station

“take the next #5 bus to TN train station and then the 6pm train to VR”

- Constraints:
 - It is 5.18pm
 - Train to VR leaves at TN train station at 6.00pm
 - it takes 3 minutes to walk from DISI to BUS stop
 - Bus #5 passes 5.20pm or at 5.40pm
 - Bus #5 takes 15 minutes to TN train station
 - it takes 2 minutes to walk from BUS stop to TN train station

Stable Quotient: Intuitive example

Task: plan trip from DISI to VR train station

“take the next #5 bus to TN train station and then the 6pm train to VR”

- Constraints:
 - It is 5.18pm
 - Train to VR leaves at TN train station at 6.00pm
 - it takes 3 minutes to walk from DISI to BUS stop
 - Bus #5 passes 5.20pm or at 5.40pm
 - Bus #5 takes 15 minutes to TN train station
 - it takes 2 minutes to walk from BUS stop to TN train station
- Time-Abstract plan (U_A):
 - “walk to bus stop; take 5.40 #5 bus to TN train-station stop;
 - walk to train station; take the 6pm train to VR”

Stable Quotient: Intuitive example

Task: plan trip from DISI to VR train station

“take the next #5 bus to TN train station and then the 6pm train to VR”

- Constraints:

- It is 5.18pm
- Train to VR leaves at TN train station at 6.00pm
- it takes 3 minutes to walk from DISI to BUS stop
- Bus #5 passes 5.20pm or at 5.40pm
- Bus #5 takes 15 minutes to TN train station
- it takes 2 minutes to walk from BUS stop to TN train station

- Time-Abstract plan (U_A):

“walk to bus stop; take 5.40 #5 bus to TN train-station stop;
walk to train station; take the 6pm train to VR”

- Actual (implicit) plan (A):

“wait δ_1 ; walk to bus stop; wait δ_2 ; take 5.40 #5 bus to TN train-station stop;
wait δ_3 at bus stop; walk to train station; wait δ_4 ; take the 6pm train to VR”
where $\delta_1 + \delta_2 = 19min$ and $\delta_3 + \delta_4 = 3min$

Stable Quotient: Intuitive example

Task: plan trip from DISI to VR train station

“take the next #5 bus to TN train station and then the 6pm train to VR”

- Constraints:
 - It is 5.18pm
 - Train to VR leaves at TN train station at 6.00pm
 - it takes 3 minutes to walk from DISI to BUS stop
 - Bus #5 passes 5.20pm or at 5.40pm
 - Bus #5 takes 15 minutes to TN train station
 - it takes 2 minutes to walk from BUS stop to TN train station
- Time-Abstract plan (U_A):

“walk to bus stop; take 5.40 #5 bus to TN train-station stop;
walk to train station; take the 6pm train to VR”
- Actual (implicit) plan (A):

“wait δ_1 ; walk to bus stop; wait δ_2 ; take 5.40 #5 bus to TN train-station stop;
wait δ_3 at bus stop; walk to train station; wait δ_4 ; take the 6pm train to VR”
where $\delta_1 + \delta_2 = 19min$ and $\delta_3 + \delta_4 = 3min$
- all executions with distinct values of δ_i are bisimilar

Outline

- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems**
 - Making the state space finite
 - Region automata**
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises

Region Equivalence over clock interpretation

Preliminary definitions & terminology

Given a clock x :

- $\lfloor x \rfloor$ is the integral part of x (ex: $\lfloor 3.7 \rfloor = 3$)
- $\text{fr}(x)$ is the fractional part of x (ex: $\text{fr}(3.7) = 0.7$)
- C_x is the maximum constant occurring in clock constraints $x \bowtie C_x$

Region Equivalence over clock interpretation

Preliminary definitions & terminology

Given a clock x :

- $\lfloor x \rfloor$ is the integral part of x (ex: $\lfloor 3.7 \rfloor = 3$)
- $\text{fr}(x)$ is the fractional part of x (ex: $\text{fr}(3.7) = 0.7$)
- C_x is the maximum constant occurring in clock constraints $x \bowtie C_x$

Region Equivalence: $\nu \cong \nu'$

Given a timed automaton A , two clock interpretations ν, ν' are **region equivalent** ($\nu \cong \nu'$) iff all the following conditions hold:

Region Equivalence over clock interpretation

Preliminary definitions & terminology

Given a clock x :

- $\lfloor x \rfloor$ is the integral part of x (ex: $\lfloor 3.7 \rfloor = 3$)
- $\text{fr}(x)$ is the fractional part of x (ex: $\text{fr}(3.7) = 0.7$)
- C_x is the maximum constant occurring in clock constraints $x \bowtie C_x$

Region Equivalence: $\nu \cong \nu'$

Given a timed automaton A , two clock interpretations ν, ν' are **region equivalent** ($\nu \cong \nu'$) iff all the following conditions hold:

C1: For every clock x , either $\lfloor \nu(x) \rfloor = \lfloor \nu'(x) \rfloor$ or $\lfloor \nu(x) \rfloor, \lfloor \nu'(x) \rfloor \geq C_x$

Region Equivalence over clock interpretation

Preliminary definitions & terminology

Given a clock x :

- $\lfloor x \rfloor$ is the integral part of x (ex: $\lfloor 3.7 \rfloor = 3$)
- $\text{fr}(x)$ is the fractional part of x (ex: $\text{fr}(3.7) = 0.7$)
- C_x is the maximum constant occurring in clock constraints $x \bowtie C_x$

Region Equivalence: $\nu \cong \nu'$

Given a timed automaton A , two clock interpretations ν, ν' are **region equivalent** ($\nu \cong \nu'$) iff all the following conditions hold:

- C1:** For every clock x , either $\lfloor \nu(x) \rfloor = \lfloor \nu'(x) \rfloor$ or $\lfloor \nu(x) \rfloor, \lfloor \nu'(x) \rfloor \geq C_x$
- C2:** For every clock pair x, y s.t. $\nu(x), \nu'(x) \leq C_x$ and $\nu(y), \nu'(y) \leq C_y$, $\text{fr}(\nu(x)) \leq \text{fr}(\nu(y))$ iff $\text{fr}(\nu'(x)) \leq \text{fr}(\nu'(y))$

Region Equivalence over clock interpretation

Preliminary definitions & terminology

Given a clock x :


- $\lfloor x \rfloor$ is the integral part of x (ex: $\lfloor 3.7 \rfloor = 3$)
- $\text{fr}(x)$ is the fractional part of x (ex: $\text{fr}(3.7) = 0.7$)
- C_x is the maximum constant occurring in clock constraints $x \bowtie C_x$

Region Equivalence: $\nu \cong \nu'$


Given a timed automaton A , two clock interpretations ν, ν' are **region equivalent** ($\nu \cong \nu'$) iff all the following conditions hold:

- C1:** For every clock x , either $\lfloor \nu(x) \rfloor = \lfloor \nu'(x) \rfloor$ or $\lfloor \nu(x) \rfloor, \lfloor \nu'(x) \rfloor \geq C_x$
- C2:** For every clock pair x, y s.t. $\nu(x), \nu'(x) \leq C_x$ and $\nu(y), \nu'(y) \leq C_y$,
 $\text{fr}(\nu(x)) \leq \text{fr}(\nu(y))$ iff $\text{fr}(\nu'(x)) \leq \text{fr}(\nu'(y))$
- C3:** For every clock x s.t. $\nu(x), \nu'(x) \leq C_x$
 $\text{fr}(\nu(x)) = 0$ iff $\text{fr}(\nu'(x)) = 0$

Conditions:

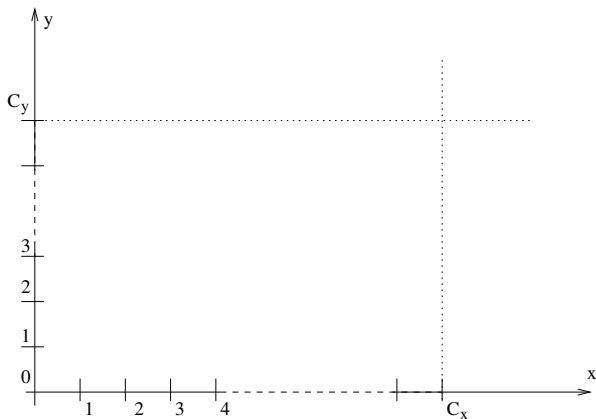


Conditions: C1

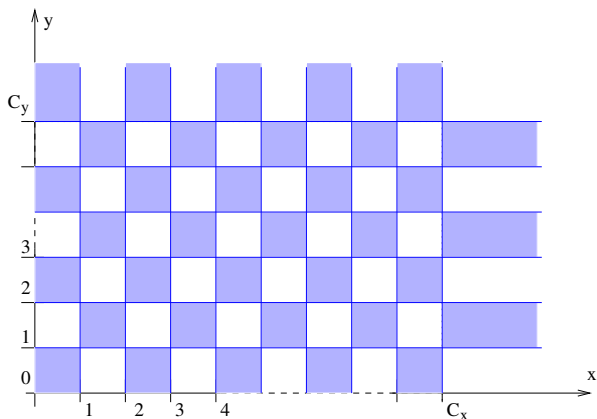

C1: For every clock x , either $\lfloor \nu(x) \rfloor = \lfloor \nu'(x) \rfloor$ or $\lfloor \nu(x) \rfloor, \lfloor \nu'(x) \rfloor \geq C_x$


Conditions: C1 + C2

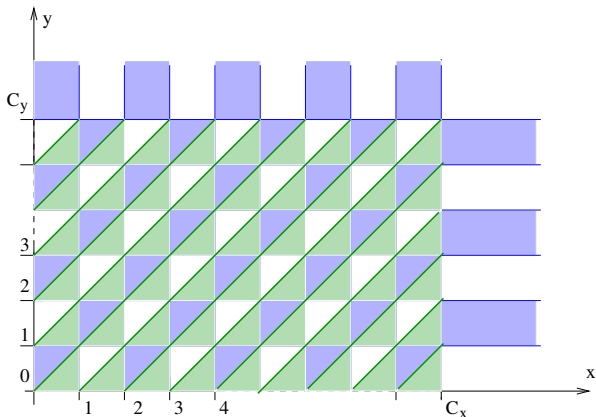

C1: For every clock x , either $\lfloor \nu(x) \rfloor = \lfloor \nu'(x) \rfloor$ or $\lfloor \nu(x) \rfloor, \lfloor \nu'(x) \rfloor \geq C_x$


C2: For every clock pair x, y s.t. $\nu(x), \nu'(x) \leq C_x$ and $\nu(y), \nu'(y) \leq C_y$,
 $\text{fr}(\nu(x)) \leq \text{fr}(\nu(y))$ iff $\text{fr}(\nu'(x)) \leq \text{fr}(\nu'(y))$

Conditions: C1 + C2 + C3

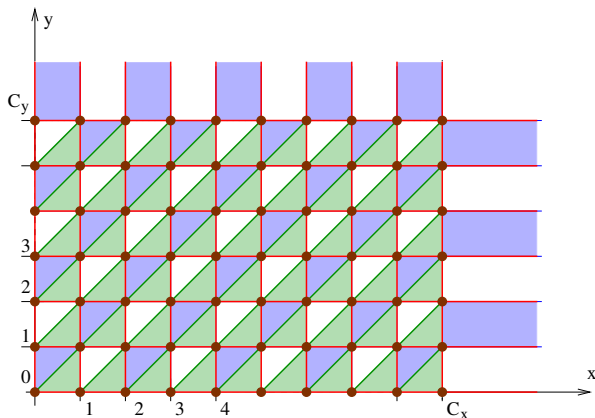

- C1:** For every clock x , either $\lfloor \nu(x) \rfloor = \lfloor \nu'(x) \rfloor$ or $\lfloor \nu(x) \rfloor, \lfloor \nu'(x) \rfloor \geq C_x$
- C2:** For every clock pair x, y s.t. $\nu(x), \nu'(x) \leq C_x$ and $\nu(y), \nu'(y) \leq C_y$,
 $\text{fr}(\nu(x)) \leq \text{fr}(\nu(y))$ iff $\text{fr}(\nu'(x)) \leq \text{fr}(\nu'(y))$
- C3:** For every clock x s.t. $\nu(x), \nu'(x) \leq C_x$, $\text{fr}(\nu(x)) = 0$ iff $\text{fr}(\nu'(x)) = 0$

Regions, intuitive idea:

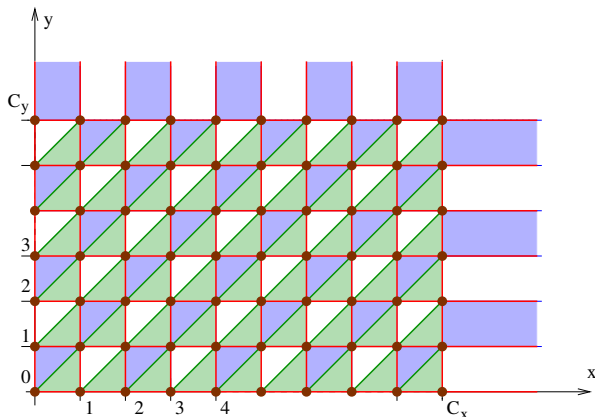


Intuition: $\nu \cong \nu'$ iff they satisfy the same set of constraints in the form

$$x_i < c, x_i > c, x_i = c, x_i - x_j < c, x_i - x_j > c, x_i - x_j = c$$

s.t. $c \leq C_{x_i}$

Region Operations

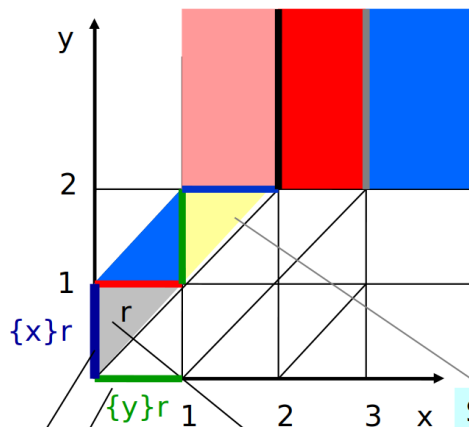

Reset
regions

Successor regions,
 $Succ(r)$

An equivalence class (i.e. a *region*)

Properties of Regions

- The region equivalence relation \cong is a **time-abstract bisimulation**:

Properties of Regions

- The region equivalence relation \cong is a **time-abstract bisimulation**:
 - **Action transitions**: if $\nu \cong \mu$ and $\langle l, \nu \rangle \xrightarrow{a} \langle l', \nu' \rangle$ for some l', ν' , then there exists μ' s.t. $\nu' \cong \mu'$ and $\langle l, \mu \rangle \xrightarrow{a} \langle l', \mu' \rangle$

Properties of Regions

- The region equivalence relation \cong is a **time-abstract bisimulation**:
 - **Action transitions**: if $\nu \cong \mu$ and $\langle l, \nu \rangle \xrightarrow{a} \langle l', \nu' \rangle$ for some l', ν' , then there exists μ' s.t. $\nu' \cong \mu'$ and $\langle l, \mu \rangle \xrightarrow{a} \langle l', \mu' \rangle$
 - **Wait transitions**: if $\nu \cong \mu$, then for every $\delta \in \mathbb{Q}^+$ there exists $\delta' \in \mathbb{Q}^+$ s.t. $\nu + \delta \cong \mu + \delta'$


Properties of Regions

- The region equivalence relation \cong is a **time-abstract bisimulation**:


- **Action transitions**: if $\nu \cong \mu$ and $\langle l, \nu \rangle \xrightarrow{a} \langle l', \nu' \rangle$ for some l', ν' , then there exists μ' s.t. $\nu' \cong \mu'$ and $\langle l, \mu \rangle \xrightarrow{a} \langle l', \mu' \rangle$
- **Wait transitions**: if $\nu \cong \mu$, then for every $\delta \in \mathbb{Q}^+$ there exists $\delta' \in \mathbb{Q}^+$ s.t. $\nu + \delta \cong \mu + \delta'$

\implies If $\nu \cong \mu$, then $\langle l, \nu \rangle$ and $\langle l, \mu \rangle$ satisfy the same temporal-logic formulas


Time-abstract Bisimulation in Regions

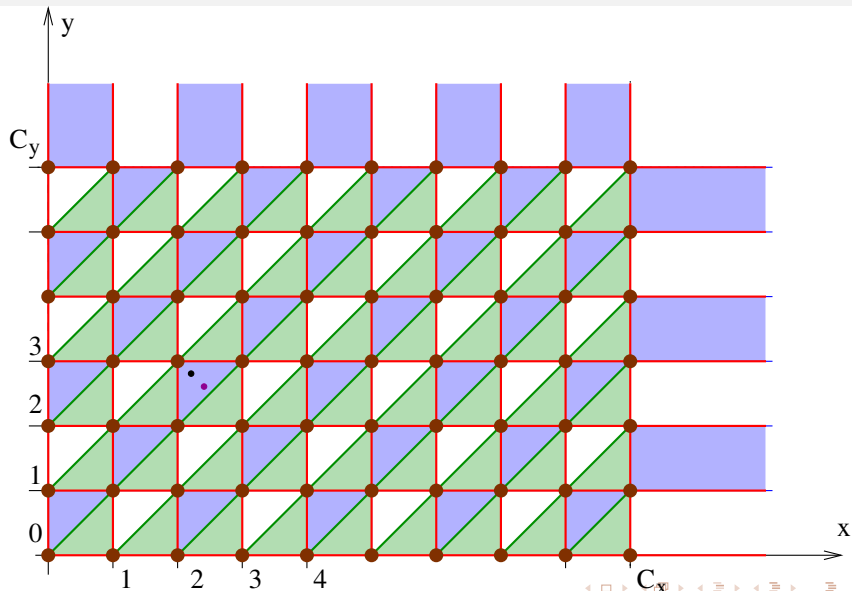


Time-abstract Bisimulation in Regions

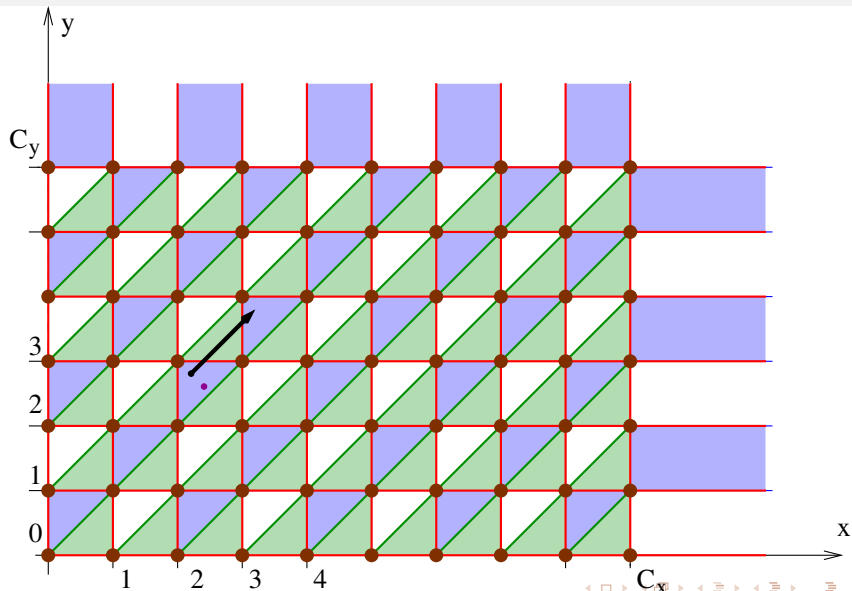


Time-abstract Bisimulation in Regions

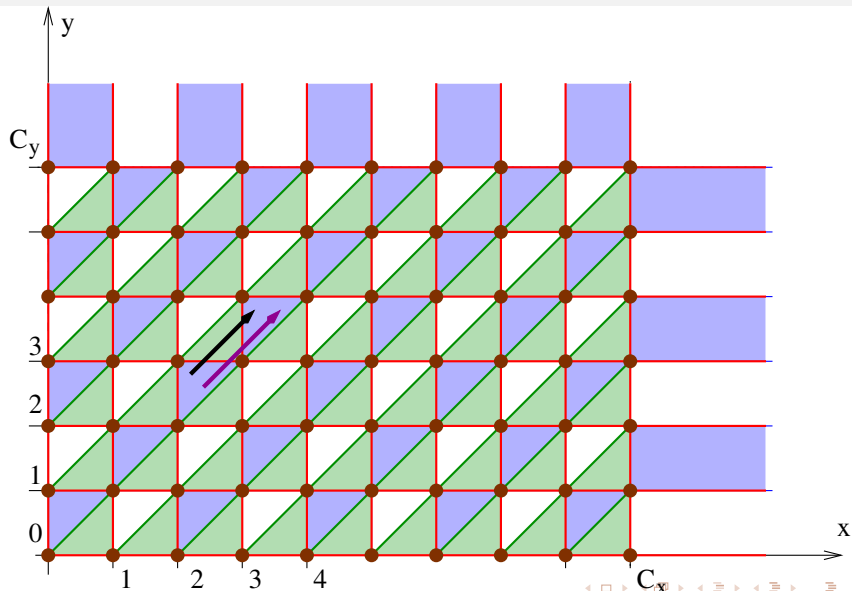


Time-abstract Bisimulation in Regions

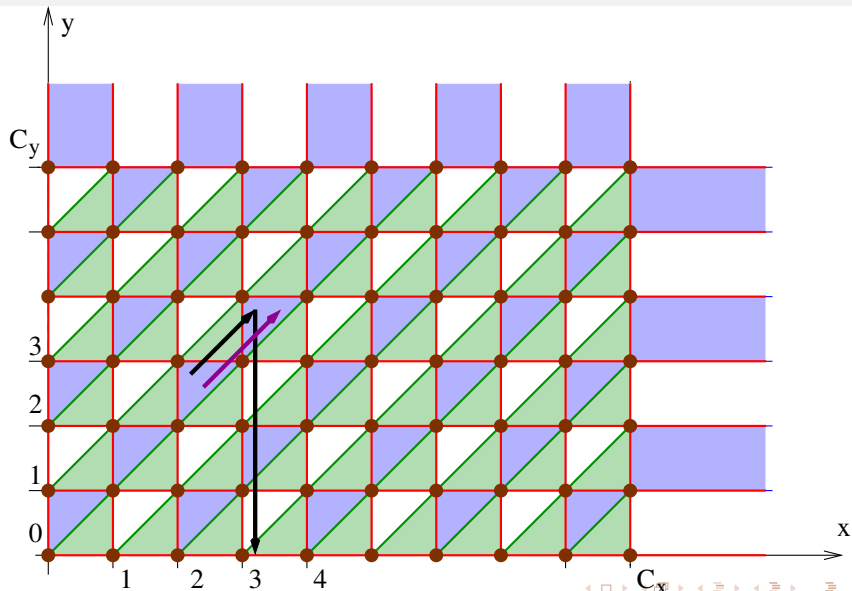


Time-abstract Bisimulation in Regions

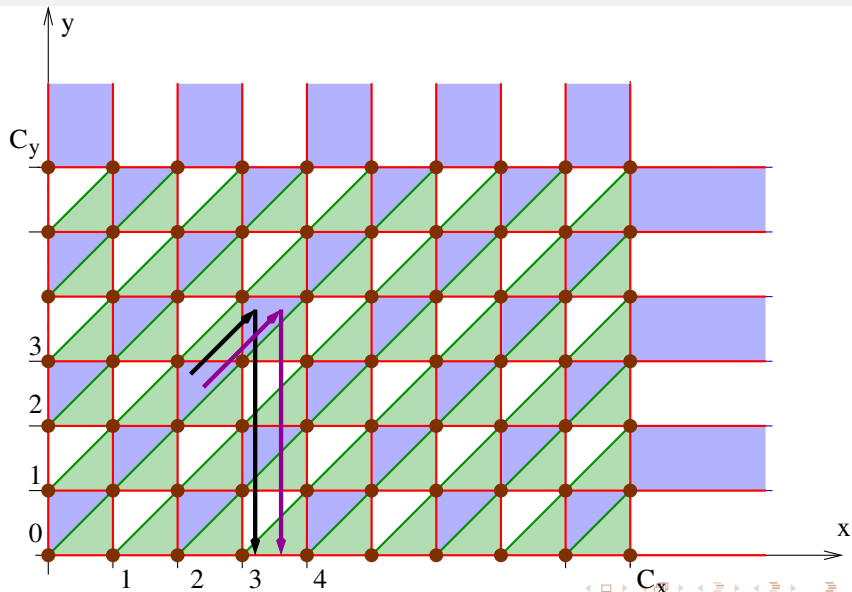


Time-abstract Bisimulation in Regions

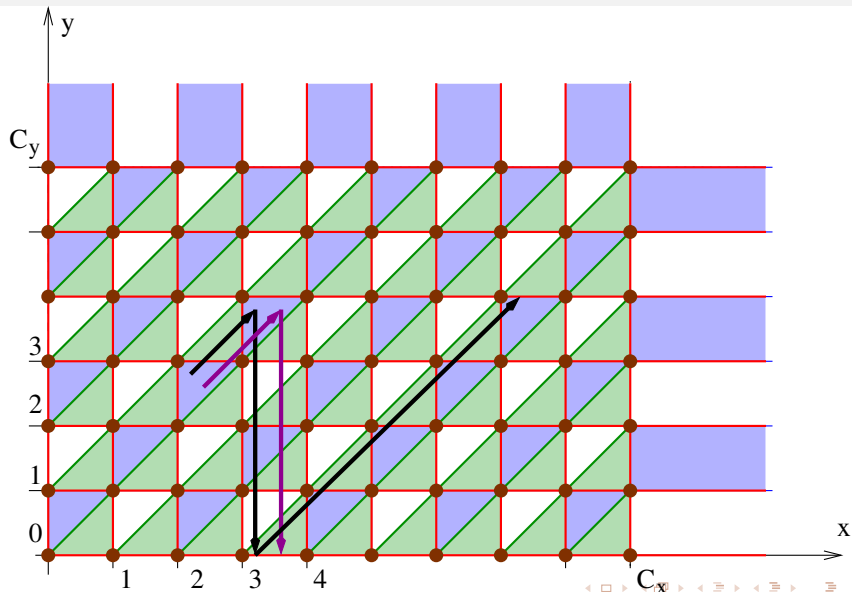


Time-abstract Bisimulation in Regions

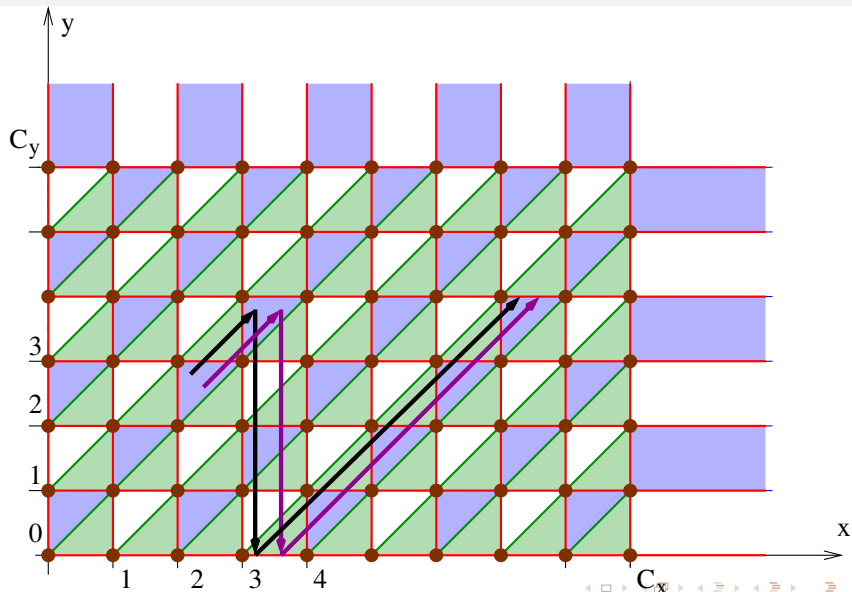


Time-abstract Bisimulation in Regions

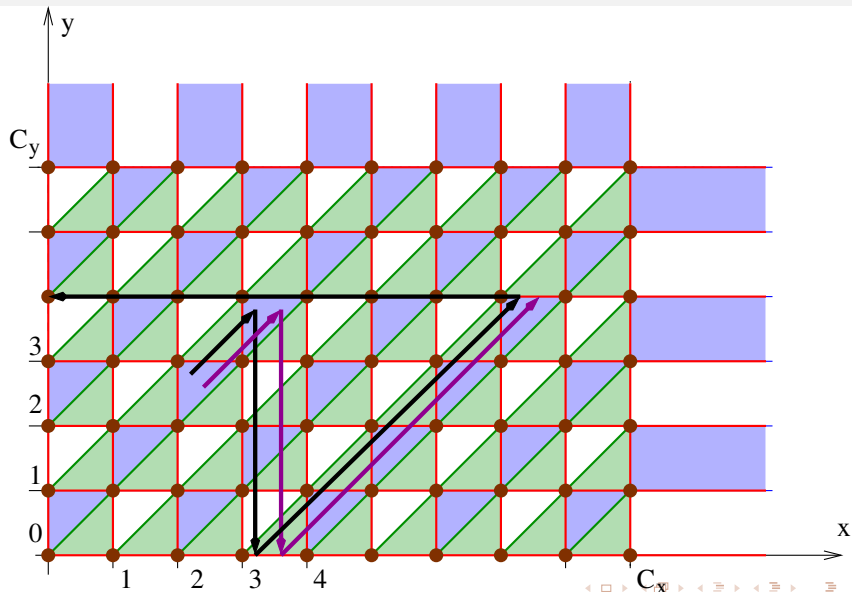


Time-abstract Bisimulation in Regions

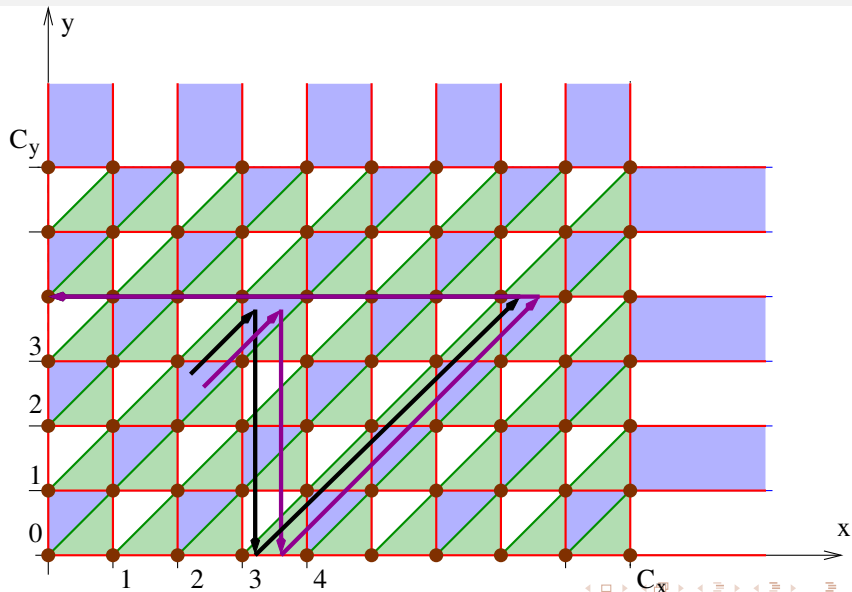


Time-abstract Bisimulation in Regions

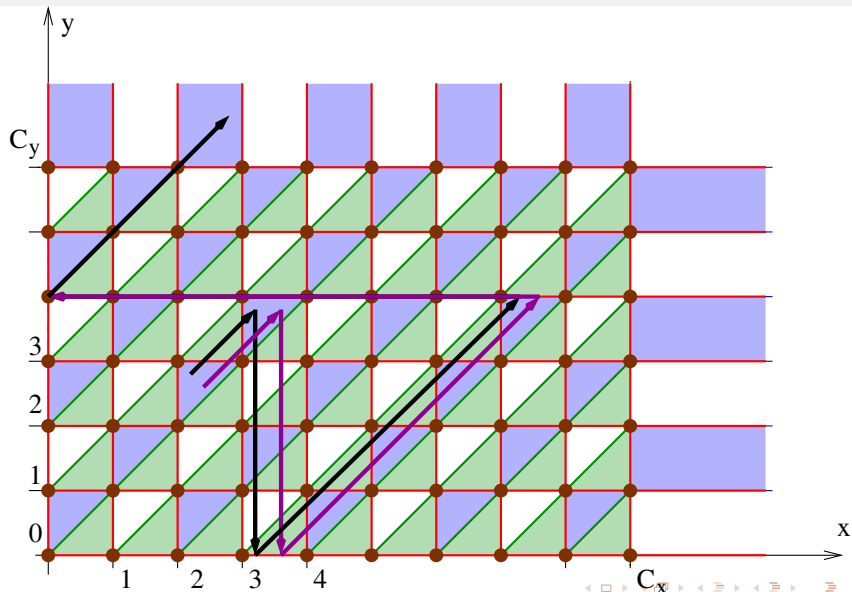


Time-abstract Bisimulation in Regions

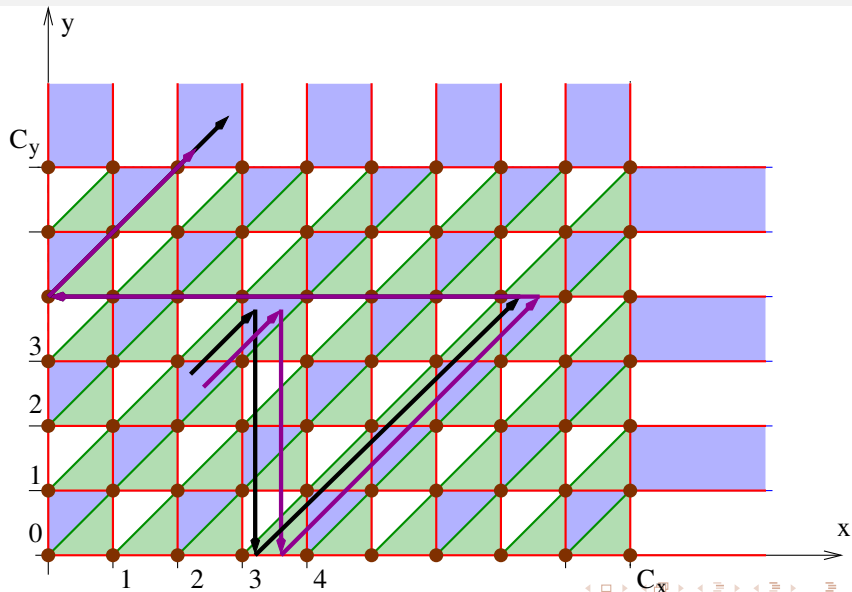


Time-abstract Bisimulation in Regions

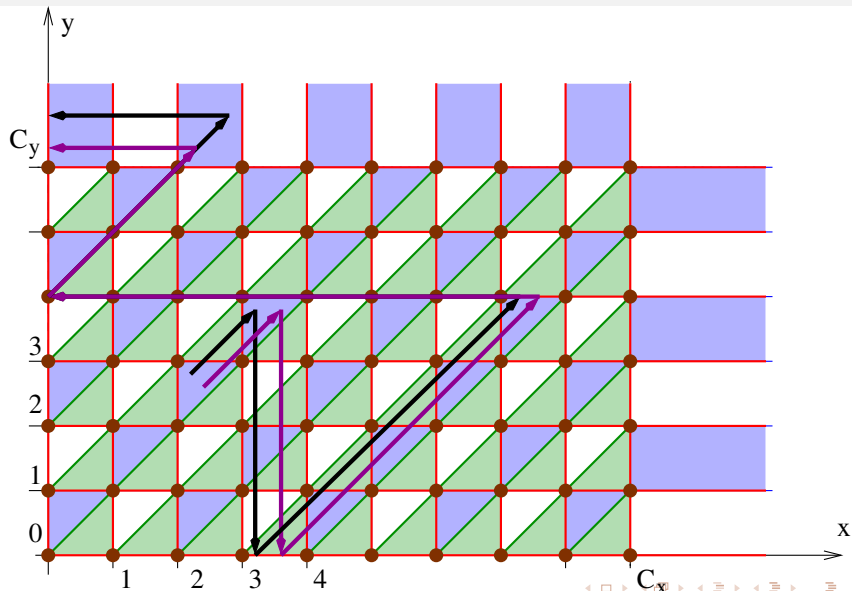


Time-abstract Bisimulation in Regions

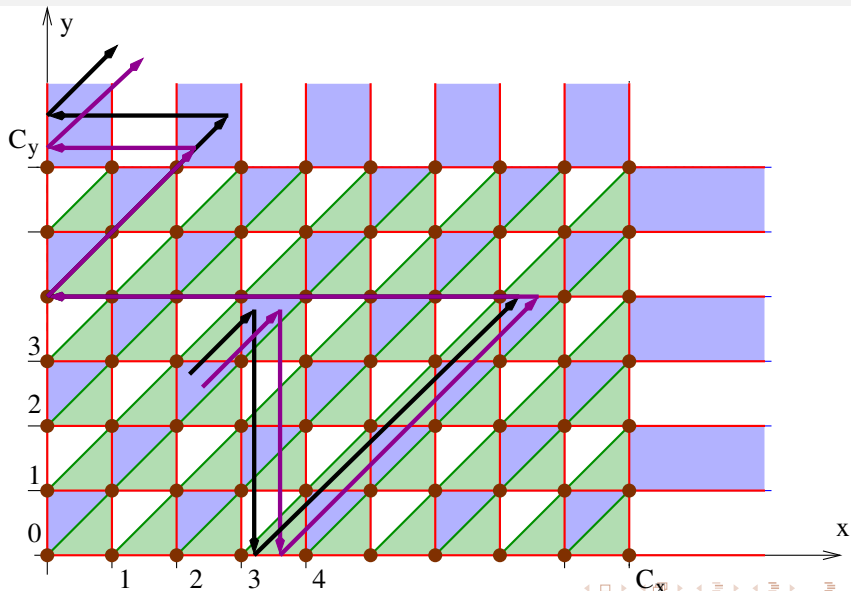

Time-abstract Bisimulation in Regions

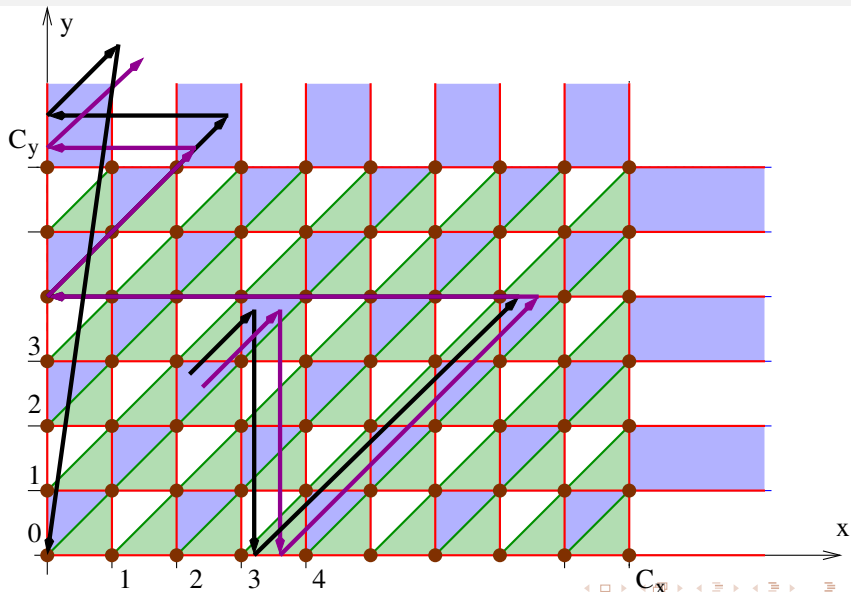

Time-abstract Bisimulation in Regions

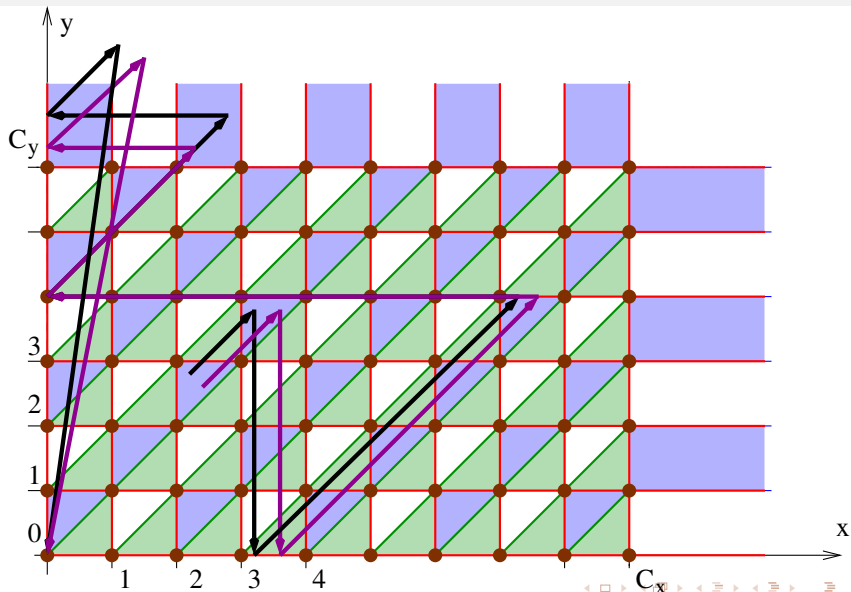

Number of Clock Regions

- Clock region: equivalence class of clock interpretations
- Number of clock regions upper-bounded by

$$k! \cdot 2^k \cdot \prod_{x \in X} (2 \cdot C_x + 2), \quad \text{s.t. } k \stackrel{\text{def}}{=} ||X||$$

- **finite!**
- exponential in the number of clocks
- **grows with the values of C_x**

Number of Clock Regions


- Clock region: equivalence class of clock interpretations
- Number of clock regions upper-bounded by

$$k! \cdot 2^k \cdot \prod_{x \in X} (2 \cdot C_x + 2), \quad \text{s.t. } k \stackrel{\text{def}}{=} ||X||$$

- **finite!**
- exponential in the number of clocks
- **grows with the values of C_x**

Example

- 2 clocks x, y , $C_x = 2$, $C_y = 1$
 - 8 open regions
 - 14 open line segments
 - 6 corner points
- ⇒ 28 regions
- $$< 2 \cdot 2^2 \cdot (2 \cdot 2 + 2) \cdot (2 \cdot 1 + 2) = 192$$



Region automaton

- Equivalent states = identical location + \cong -equivalent evaluations

Region automaton

- Equivalent states = identical location + \cong -equivalent evaluations
- Equivalent Classes (regions): finite, stable, L^F -sensitive

Region automaton

- Equivalent states = identical location + \cong -equivalent evaluations
- Equivalent Classes (regions): finite, stable, L^F -sensitive
- $R(A)$: **Region automaton of A**
 - States: $\langle l, r(A) \rangle$ s.t. $r(A)$ regions of A \implies **Finite state automaton!**



Region automaton

- Equivalent states = identical location + \cong -equivalent evaluations
- Equivalent Classes (regions): finite, stable, L^F -sensitive
- $R(A)$: **Region automaton of A**
 - States: $\langle l, r(A) \rangle$ s.t. $r(A)$ regions of A
 \implies **Finite state automaton!**
- Reachability problem $\langle A, L^F \rangle \implies$ Reachability problem $\langle R(A), L^F \rangle$



Region automaton

- Equivalent states = identical location + \cong -equivalent evaluations
- Equivalent Classes (regions): finite, stable, L^F -sensitive
- $R(A)$: **Region automaton of A**
 - States: $\langle l, r(A) \rangle$ s.t. $r(A)$ regions of A
 - ⇒ **Finite state automaton!**
- Reachability problem $\langle A, L^F \rangle \implies$ Reachability problem $\langle R(A), L^F \rangle$
- ⇒ **Reachability in timed automata reduced to that in finite automata!**

Example: Region graph of a simple timed automata

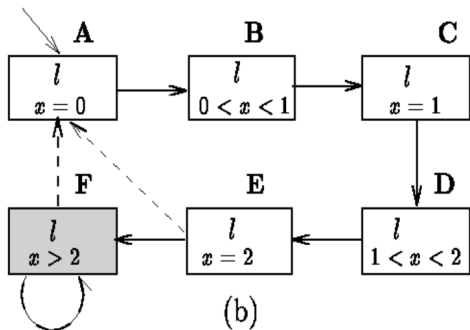

Example: Region graph of a simple timed automata

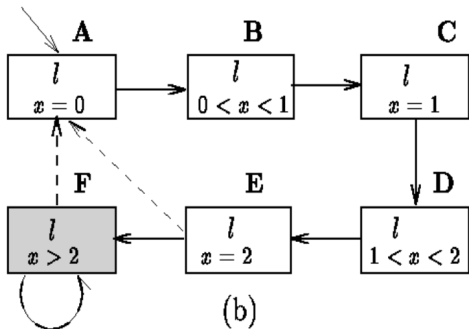

May be further reduced (e.g., collapsing B, C, D into one state)

Complexity of Reasoning with Timed Automata

Reachability in Timed Automata

- **Decidable!**
- Linear with number of locations
- Exponential in the number of clocks
- **Grows with the values of C_x**
- Overall, PSPACE-Complete

Complexity of Reasoning with Timed Automata

Reachability in Timed Automata

- **Decidable!**
- Linear with number of locations
- Exponential in the number of clocks
- **Grows with the values of C_x**
- Overall, PSPACE-Complete

Language-containment with Timed Automata

Undecidable!

Outline


- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems**
 - Making the state space finite
 - Region automata
 - Zone automata**
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises

Zone Automata

- Collapse regions by **convex unions of clock regions**


Zone Automata

- Collapse regions by **convex unions of clock regions**
- **Clock Zone** φ : set/conjunction of clock constraints in the form $(x_i \bowtie c)$, $(x_i - x_j \bowtie c)$, $\bowtie \in \{>, <, =, \geq, \leq\}$, $c \in \mathbb{Z}$

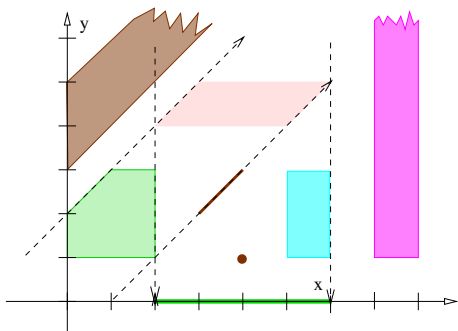


Zone Automata

- Collapse regions by **convex unions of clock regions**
- **Clock Zone** φ : set/conjunction of clock constraints in the form $(x_i \bowtie c)$, $(x_i - x_j \bowtie c)$, $\bowtie \in \{>, <, =, \geq, \leq\}$, $c \in \mathbb{Z}$
- φ is a convex set in the k-dimensional euclidean space
 - possibly unbounded

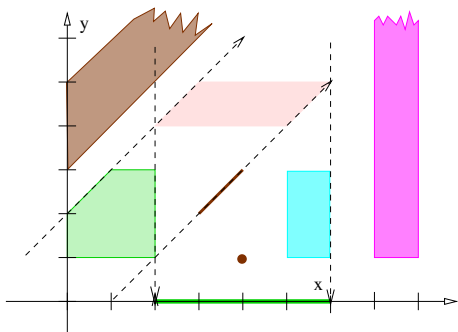


Zone Automata

- Collapse regions by **convex unions of clock regions**
 - **Clock Zone** φ : set/conjunction of clock constraints in the form $(x_i \bowtie c)$, $(x_i - x_j \bowtie c)$, $\bowtie \in \{>, <, =, \geq, \leq\}$, $c \in \mathbb{Z}$
 - φ is a convex set in the k -dimensional euclidean space
 - possibly unbounded
- ⇒ Contains all possible relationship for all clock value in a set

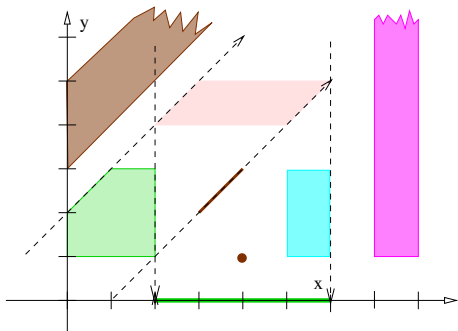

Zone Automata

- Collapse regions by **convex unions of clock regions**
 - **Clock Zone** φ : set/conjunction of clock constraints in the form $(x_i \bowtie c)$, $(x_i - x_j \bowtie c)$, $\bowtie \in \{>, <, =, \geq, \leq\}$, $c \in \mathbb{Z}$
 - φ is a convex set in the k -dimensional euclidean space
 - possibly unbounded
- ⇒ Contains all possible relationship for all clock value in a set
- **Symbolic state**: $\langle l, \varphi \rangle$
 - l : location
 - φ : clock zone

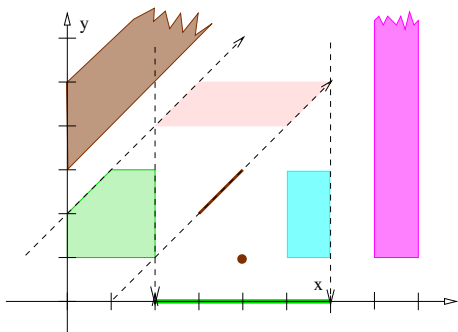

Zone Automata

Definition: Zone Automaton

- Given a Timed Automaton $A \stackrel{\text{def}}{=} \langle L, L^0, \Sigma, X, \Phi(X), E \rangle$,
- the **Zone Automaton** $Z(A)$ is a transition system $\langle Q, Q^0, \Sigma, \rightarrow \rangle$ s.t.
 - Q : set of all zones of A (a zone is $\langle l, \varphi \rangle$)
 - $Q^0 \stackrel{\text{def}}{=} \{ \langle l, [X := 0] \rangle \mid l \in L^0 \}$
 - Σ : set of labels/events in A
 - \rightarrow : set of “wait&switch” **symbolic transitions**, in the form:

$$\langle l, \varphi \rangle \xrightarrow{a} \langle l', \text{succ}(\varphi, e) \rangle$$
 - $\text{succ}(\varphi, e)$: successor of φ after (waiting and) executing the switch e
- $\text{succ}(\langle l, \varphi \rangle, e) \stackrel{\text{def}}{=} \langle l', \text{succ}(\varphi, e) \rangle$

Zone Automata: Symbolic Transitions


Definition: $\text{succ}(\varphi, e)$

- Let $e \stackrel{\text{def}}{=} \langle I, a, \psi, \lambda, I' \rangle$, and ϕ, ϕ' the invariants in I, I'
- Then

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

- \wedge : standard conjunction/intersection
- \uparrow : projection to infinity: $\psi \uparrow \stackrel{\text{def}}{=} \{\nu + \delta \mid \nu \in \psi, \delta \in [0, +\infty)\}$
- $[\lambda := 0]$: reset projection: $\psi[\lambda := 0] \stackrel{\text{def}}{=} \{\nu[\lambda := 0] \mid \nu \in \psi\}$
- note: φ is considered “immediately before entering I' ”


Zone Automata: Symbolic Transitions (cont.)



$$\mathit{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone:** values before entering the location



$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone:** values before entering the location
- **Intersection with invariant ϕ**



$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone:** values before entering the location
- **Intersection with invariant ϕ :** values allowed to enter the location



$$\mathit{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone:** values before entering the location
- **Intersection with invariant ϕ :** values allowed to enter the location
- **Projection to infinity:** values allowed to enter the location, after waiting unbounded time

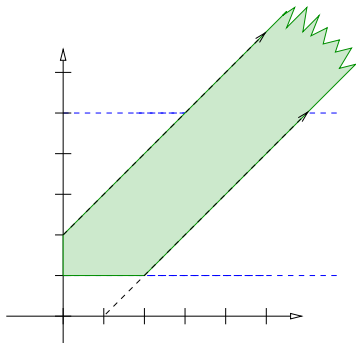

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone**: values before entering the location
- **Intersection with invariant ϕ** : values allowed to enter the location
- **Projection to infinity**: values allowed to enter the location, after waiting unbounded time
- **Intersection with invariant ϕ**

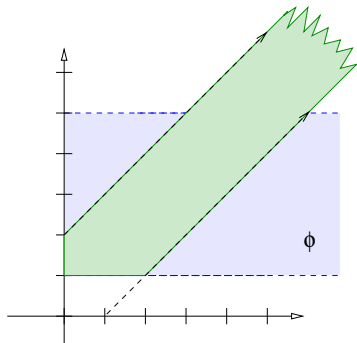

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone:** values before entering the location
- **Intersection with invariant ϕ :** values allowed to enter the location
- **Projection to infinity:** values allowed to enter the location, after waiting unbounded time
- **Intersection with invariant ϕ :** values allowed to enter the location, after waiting a legal amount of time



$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone**: values before entering the location
- **Intersection with invariant ϕ** : values allowed to enter the location
- **Projection to infinity**: values allowed to enter the location, after waiting unbounded time
- **Intersection with invariant ϕ** : values allowed to enter the location, after waiting a legal amount of time
- **Intersection with guard ψ**



$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone**: values before entering the location
- **Intersection with invariant ϕ** : values allowed to enter the location
- **Projection to infinity**: values allowed to enter the location, after waiting unbounded time
- **Intersection with invariant ϕ** : values allowed to enter the location, after waiting a legal amount of time
- **Intersection with guard ψ** : values allowed to enter the location, after waiting a legal amount of time, from which the switch can be shot



$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone**: values before entering the location
- **Intersection with invariant ϕ** : values allowed to enter the location
- **Projection to infinity**: values allowed to enter the location, after waiting unbounded time
- **Intersection with invariant ϕ** : values allowed to enter the location, after waiting a legal amount of time
- **Intersection with guard ψ** : values allowed to enter the location, after waiting a legal amount of time, from which the switch can be shot
- **Reset projection λ**



$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone**: values before entering the location
- **Intersection with invariant ϕ** : values allowed to enter the location
- **Projection to infinity**: values allowed to enter the location, after waiting unbounded time
- **Intersection with invariant ϕ** : values allowed to enter the location, after waiting a legal amount of time
- **Intersection with guard ψ** : values allowed to enter the location, after waiting a legal amount of time, from which the switch can be shot
- **Reset projection λ** : values ..., after reset



$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Zone Automata: Symbolic Transitions (cont.)


- **Initial zone**: values before entering the location
- **Intersection with invariant ϕ** : values allowed to enter the location
- **Projection to infinity**: values allowed to enter the location, after waiting unbounded time
- **Intersection with invariant ϕ** : values allowed to enter the location, after waiting a legal amount of time
- **Intersection with guard ψ** : values allowed to enter the location, after waiting a legal amount of time, from which the switch can be shot
- **Reset projection λ** : values ..., after reset



⇒ Final!


$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Example: Zone Automata, Symbolic Transitions




Example: Zone Automata, Symbolic Transitions

- Initial zone: $(x \geq 0) \wedge (x \leq 2) \wedge$
 $(y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$




Example: Zone Automata, Symbolic Transitions

- Initial zone: $(x \geq 0) \wedge (x \leq 2) \wedge (y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- Intersection with invariant $\phi : (y \geq 1) \wedge (y \leq 5)$




Example: Zone Automata, Symbolic Transitions

- **Initial zone:** $(x \geq 0) \wedge (x \leq 2) \wedge (y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (x \leq 2) \wedge (y \geq 1) \wedge (y \leq 3) \wedge (y - x \leq 2)$




Example: Zone Automata, Symbolic Transitions

- **Initial zone:** $(x \geq 0) \wedge (x \leq 2) \wedge (y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (x \leq 2) \wedge (y \geq 1) \wedge (y \leq 3) \wedge (y - x \leq 2)$
- **Projection to infinity:**
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$

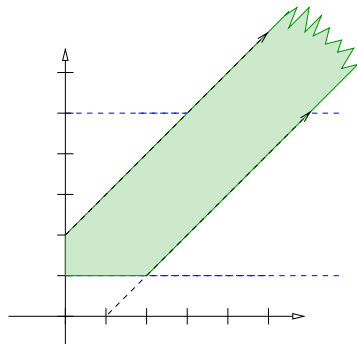


Example: Zone Automata, Symbolic Transitions

- **Initial zone:** $(x \geq 0) \wedge (x \leq 2) \wedge (y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (x \leq 2) \wedge (y \geq 1) \wedge (y \leq 3) \wedge (y - x \leq 2)$
- **Projection to infinity:**
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$

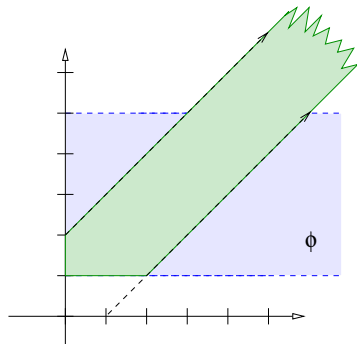


Example: Zone Automata, Symbolic Transitions

- **Initial zone:** $(x \geq 0) \wedge (x \leq 2) \wedge (y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (x \leq 2) \wedge (y \geq 1) \wedge (y \leq 3) \wedge (y - x \leq 2)$
- **Projection to infinity:**
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y \leq 5) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$




Example: Zone Automata, Symbolic Transitions

- **Initial zone:** $(x \geq 0) \wedge (x \leq 2) \wedge (y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (x \leq 2) \wedge (y \geq 1) \wedge (y \leq 3) \wedge (y - x \leq 2)$
- **Projection to infinity:**
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y \leq 5) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with guard ψ :** $(y \geq 4)$




Example: Zone Automata, Symbolic Transitions

- **Initial zone:** $(x \geq 0) \wedge (x \leq 2) \wedge (y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (x \leq 2) \wedge (y \geq 1) \wedge (y \leq 3) \wedge (y - x \leq 2)$
- **Projection to infinity:**
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y \leq 5) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with guard ψ :** $(y \geq 4)$
 $\implies (y \geq 4) \wedge (y \leq 5) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$

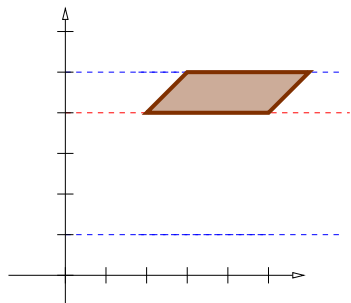


Example: Zone Automata, Symbolic Transitions

- **Initial zone:** $(x \geq 0) \wedge (x \leq 2) \wedge (y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (x \leq 2) \wedge (y \geq 1) \wedge (y \leq 3) \wedge (y - x \leq 2)$
- **Projection to infinity:**
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y \leq 5) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with guard ψ :** $(y \geq 4)$
 $\implies (y \geq 4) \wedge (y \leq 5) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Reset projection $\lambda \stackrel{\text{def}}{=} \{y := 0\}$**

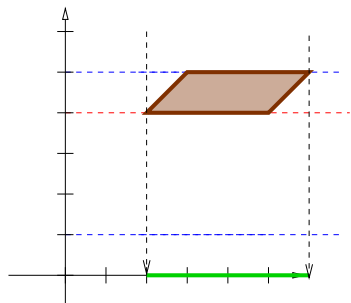


Example: Zone Automata, Symbolic Transitions

- **Initial zone:** $(x \geq 0) \wedge (x \leq 2) \wedge (y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (x \leq 2) \wedge (y \geq 1) \wedge (y \leq 3) \wedge (y - x \leq 2)$
- **Projection to infinity:**
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y \leq 5) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with guard ψ :** $(y \geq 4)$
 $\implies (y \geq 4) \wedge (y \leq 5) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Reset projection $\lambda \stackrel{\text{def}}{=} \{y := 0\}$**
 $\implies (x \geq 2) \wedge (x \leq 6) \wedge (y \geq 0) \wedge (y \leq 0)$

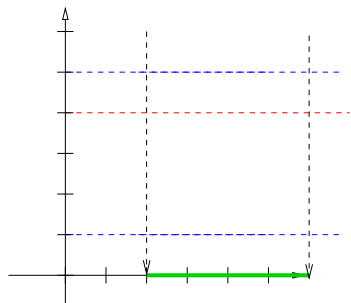

Example: Zone Automata, Symbolic Transitions

- **Initial zone:** $(x \geq 0) \wedge (x \leq 2) \wedge (y \geq 0) \wedge (y \leq 3) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (x \leq 2) \wedge (y \geq 1) \wedge (y \leq 3) \wedge (y - x \leq 2)$
- **Projection to infinity:**
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with invariant ϕ :** $(y \geq 1) \wedge (y \leq 5)$
 $\implies (x \geq 0) \wedge (y \geq 1) \wedge (y \leq 5) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Intersection with guard ψ :** $(y \geq 4)$
 $\implies (y \geq 4) \wedge (y \leq 5) \wedge (y - x \geq -1) \wedge (y - x \leq 2)$
- **Reset projection $\lambda \stackrel{\text{def}}{=} \{y := 0\}$**
 $\implies (x \geq 2) \wedge (x \leq 6) \wedge (y \geq 0) \wedge (y \leq 0)$

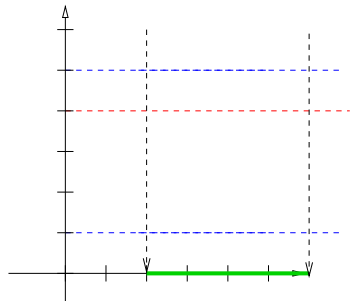

\implies Final!

Remark on $\text{succ}(\varphi, e)$

- In the above definition of $\text{succ}(\varphi, e)$, φ is considered “immediately before entering l ”:

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

Remark on $\text{succ}(\varphi, e)$

- In the above definition of $\text{succ}(\varphi, e)$, φ is considered “immediately before entering l ”:

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)[\lambda := 0]$$

- Alternative definition of $\text{succ}(\varphi, e)$, φ is considered “immediately after entering l ”:

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} (((\varphi \uparrow \wedge \phi) \wedge \psi)[\lambda := 0] \wedge \phi')$$

- no initial intersection with the invariant ϕ of source location l (here φ is assumed to be already the result of such intersection)
- final intersection with the invariant ϕ' of target location l'

Symbolic Reachability Analysis

```

1: function Reachable ( $A, L^F$ ) //  $A \stackrel{\text{def}}{=} \langle L, L^0, \Sigma, X, \Phi(X), E \rangle$ 
2: Reachable =  $\emptyset$ 
3: Frontier =  $\{\langle l_i, \{X = 0\} \rangle \mid l_i \in L^0\}$ 
4: while (Frontier  $\neq \emptyset$ ) do
5:   extract  $\langle l, \varphi \rangle$  from Frontier
6:   if ( $l \in L^F$  and  $\varphi \neq \perp$ ) then
7:     return True
8:   end if
9:   if ( $\nexists \langle l, \varphi' \rangle \in \textit{Reachable}$  s.t.  $\varphi \subseteq \varphi'$ ) then
10:    add  $\langle l, \varphi \rangle$  to Reachable
11:    for  $e \in \textit{outcoming}(l)$  do
12:      add succ( $\varphi, e$ ) to Frontier
13:    end for
14:  end if
15: end while
16: return False

```

Canonical Data-structures for Zones: DBMs

Difference-bound Matrices (DBMs)

- Matrix representation of constraints
 - bounds on a single clock
 - differences between 2 clocks
- **Reduced form** computed by all-pairs shortest path algorithm (e.g. Floyd-Warshall)
- Reduced DBM is **canonical**:
equivalent sets of constraints produce the same reduced DBM
- Operations s.a reset, time-successor, inclusion, intersection are efficient

⇒ Popular choice in timed-automata-based tools

Difference-bound matrices, DBMs

- DBM: matrix $(k + 1) \times (k + 1)$, k being the number of clocks
 - added an implicit fake variable $x_0 \stackrel{\text{def}}{=} 0$ s.t. $x_i \bowtie c \implies x_i - x_0 \bowtie c$
 - each element is a pair $(\text{value}, \{0, 1\})$, s.t. “ $\{0, 1\}$ ” means “ $\{<, \leq\}$ ”

Difference-bound matrices, DBMs

- DBM: matrix $(k + 1) \times (k + 1)$, k being the number of clocks
 - added an implicit fake variable $x_0 \stackrel{\text{def}}{=} 0$ s.t. $x_i \bowtie c \implies x_i - x_0 \bowtie c$
 - each element is a pair (value, {0, 1}), s.t. “{0, 1}” means “{<, ≤}”

- Example:

$$(0 \leq x_1)$$

$$\wedge (0 < x_2)$$

$$\wedge (x_1 < 2)$$

$$\wedge (x_2 < 1)$$

$$\wedge (x_1 - x_2 \geq 0)$$

Difference-bound matrices, DBMs

- DBM: matrix $(k + 1) \times (k + 1)$, k being the number of clocks
 - added an implicit fake variable $x_0 \stackrel{\text{def}}{=} 0$ s.t. $x_i \bowtie c \implies x_i - x_0 \bowtie c$
 - each element is a pair (value, {0, 1}), s.t. "{0, 1}" means "{<, ≤}"
- Example:

$$\begin{array}{ccccc}
 (0 \leq x_1) & \wedge (0 < x_2) & \wedge (x_1 < 2) & \wedge (x_2 < 1) & \wedge (x_1 - x_2 \geq 0) \\
 (x_0 - x_1 \leq 0) & \wedge (x_0 - x_2 < 0) & \wedge (x_1 - x_0 < 2) & \wedge (x_2 - x_0 < 1) & \wedge (x_2 - x_1 \leq 0)
 \end{array}$$

Matrix D				
	0	1	2	
0	∞	(0,1)	(0,0)	
1	(2,0)	∞	∞	
2	(1,0)	(0,1)	∞	

D_{oi} = lower bound

D_{io} = upper bound

D_{ij} = upper bound of x_i and x_j difference

• $i, j: (c, 1) \rightarrow \underline{X_i - X_j} \leq c$

• $i, j: (c, 0) \rightarrow \underline{X_i - X_j} < c$

• $i, j: \infty \rightarrow$ absence of bound

Difference-bound matrices, DBMs (cont.)

- Use all-pairs shortest paths, check DBM
 - idea: given $x_i - x_j \bowtie c$, $x_i - x_k \bowtie c_1$ and $x_k - x_j \bowtie c_2$ s.t. $\bowtie \in \{\leq, <\}$, then c is updated with $c_1 + c_2$ if $c_1 + c_2 < c$
 - **Satisfiable** (no negative loops) \implies a non-empty clock zone
 - **Canonical**: Matrices with tightest possible constraints
- Canonical DBMs represent clock zones:
equivalent sets of constraints \iff same reduced DBM

	Matrix D			Matrix D'		
	0	1	2	0	1	2
0	∞	(0,1)	(0,0)	(0,1)	(0,1)	(0,0)
1	(2,0)	∞	∞	(2,0)	(0,1)	(2,0)
2	(1,0)	(0,1)	∞	(1,0)	(0,1)	(0,1)


Canonical Data-structures for Zones: DBMs

When are two sets of constraints equivalent?


D1

$$\begin{aligned} x &\leq 1 \\ y - x &\leq 2 \\ z - y &\leq 2 \\ z &\leq 9 \end{aligned}$$

Graph




Shortest
Path
Closure




D2

$$\begin{aligned} x &\leq 1 \\ y - x &\leq 2 \\ y &\leq 3 \\ z - y &\leq 2 \\ z &\leq 7 \end{aligned}$$

Graph



Shortest
Path
Closure



Complexity Issues

- In theory:
 - Zone automaton might be exponentially bigger than the region automaton
- In practice:
 - Fewer reachable vertices \implies performances much improved

Timed Automata: summary

- Only continuous variables are timers
- Invariants and Guards: $x \bowtie \text{const}$, $\bowtie \in \{<, >, \leq, \geq\}$
- Actions: $x:=0$
- Reachability is decidable
- Clustering of regions into zones desirable in practice
- Tools: Uppaal, Kronos, RED ...
- Symbolic representation: matrices

Decidable Problems with Timed Automata

- **Model checking branching-time properties** of timed automata
- Reachability in **rectangular automata**
- **Timed bisimilarity**: are two given timed automata bisimilar?
- **Optimization**: Compute shortest paths (e.g. minimum time reachability) in timed automata with costs on locations and edges
- **Controller synthesis**: Computing winning strategies in timed automata with controllable and uncontrollable transitions

Outline

- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics**
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises

Outline


- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics**
 - Hybrid automata**
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises

Hybrid Automata




Hybrid Automata

- Locations, Switches, Labels (like in standard aut.)

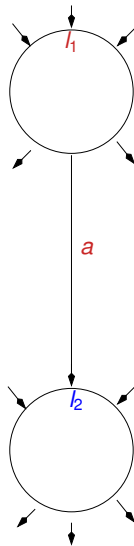


Hybrid Automata

- Locations, Switches, Labels (like in standard aut.)
- Continuous variables: $X \stackrel{\text{def}}{=} \{x_1, x_2, \dots, x_k\} \in \mathbb{R}$
 - value evolves with time
 - e.g., distance, speed, pressure, temperature, ...

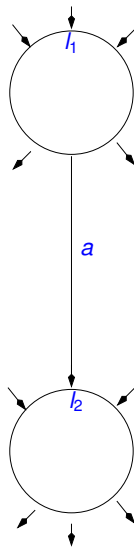


Hybrid Automata

- Locations, Switches, Labels (like in standard aut.)
- Continuous variables: $X \stackrel{\text{def}}{=} \{x_1, x_2, \dots, x_k\} \in \mathbb{R}$
 - value evolves with time
 - e.g., distance, speed, pressure, temperature, ...
- Guards: $g(X) \geq 0$
 - sets of inequalities (equalities) on functions on X
 - constrain the execution of the switch

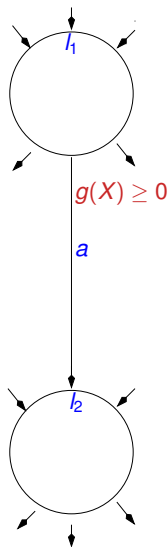


Hybrid Automata

- Locations, Switches, Labels (like in standard aut.)
- Continuous variables: $X \stackrel{\text{def}}{=} \{x_1, x_2, \dots, x_k\} \in \mathbb{R}$
 - value evolves with time
 - e.g., distance, speed, pressure, temperature, ...
- Guards: $g(X) \geq 0$
 - sets of inequalities (equalities) on functions on X
 - constrain the execution of the switch
- **Jump Transformations $J(X, X')$**
 - discrete transformation on the values of X

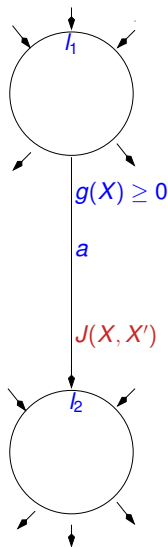


Hybrid Automata

- Locations, Switches, Labels (like in standard aut.)
- Continuous variables: $X \stackrel{\text{def}}{=} \{x_1, x_2, \dots, x_k\} \in \mathbb{R}$
 - value evolves with time
 - e.g., distance, speed, pressure, temperature, ...
- Guards: $g(X) \geq 0$
 - sets of inequalities (equalities) on functions on X
 - constrain the execution of the switch
- Jump Transformations $J(X, X')$
 - discrete transformation on the values of X
- Invariants: $X \in \text{Inv}_l(X)$
 - set of invariant constraints on X
 - ensure progress

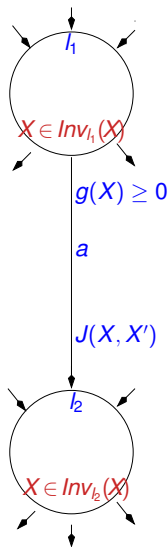


Hybrid Automata

- Locations, Switches, Labels (like in standard aut.)
- Continuous variables: $X \stackrel{\text{def}}{=} \{x_1, x_2, \dots, x_k\} \in \mathbb{R}$
 - value evolves with time
 - e.g., distance, speed, pressure, temperature, ...
- Guards: $g(X) \geq 0$
 - sets of inequalities (equalities) on functions on X
 - constrain the execution of the switch
- Jump Transformations $J(X, X')$
 - discrete transformation on the values of X
- Invariants: $X \in \text{Inv}_l(X)$
 - set of invariant constraints on X
 - ensure progress
- Continuous Flow: $\frac{dX}{dt} \in \text{flow}_l(X)$
 - set of degree-1 differential (in)equalities
 - describe continuous dynamics

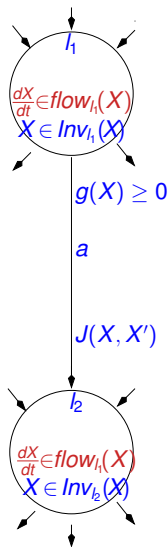

Hybrid Automata

- Locations, Switches, Labels (like in standard aut.)
- Continuous variables: $X \stackrel{\text{def}}{=} \{x_1, x_2, \dots, x_k\} \in \mathbb{R}$
 - value evolves with time
 - e.g., distance, speed, pressure, temperature, ...
- Guards: $g(X) \geq 0$
 - sets of inequalities (equalities) on functions on X
 - constrain the execution of the switch
- Jump Transformations $J(X, X')$
 - discrete transformation on the values of X
- Invariants: $X \in \text{Inv}_l(X)$
 - set of invariant constraints on X
 - ensure progress
- Continuous Flow: $\frac{dX}{dt} \in \text{flow}_l(X)$
 - set of degree-1 differential (in)equalities
 - describe continuous dynamics
- Initial: $X \in \text{Init}_l(X)$
 - initial conditions ($X \in \text{Init}_l(X) = \perp$ if $l \notin L^0$)

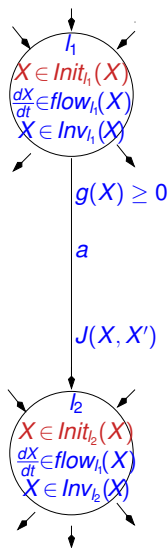

Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- L : Set of locations,
- $L^0 \in L$: Set of initial locations
- X : Set of k continuous variables
- $\Phi(X)$: Set of Constraints on X
- Σ : Set of synchronization labels (alphabet)
- E : Set of edges

Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- L : Set of locations,
- $L^0 \in L$: Set of initial locations
- X : Set of k continuous variables
- $\Phi(X)$: Set of Constraints on X
- Σ : Set of synchronization labels (alphabet)
- E : Set of edges
- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **region** ψ : subset of \mathbb{R}^k

Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- L : Set of locations,
- $L^0 \in L$: Set of initial locations
- X : Set of k continuous variables
- $\Phi(X)$: Set of Constraints on X
- Σ : Set of synchronization labels (alphabet)
- E : Set of edges
- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **region** ψ : subset of \mathbb{R}^k
- For each location l :
 - Initial states: region $Init_l(X)$
 - Invariant: region $Inv_l(X)$
 - Continuous dynamics: $\frac{dX}{dt} \in flow_l(X)$

Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- L : Set of locations,
- $L^0 \in L$: Set of initial locations
- X : Set of k continuous variables
- $\Phi(X)$: Set of Constraints on X
- Σ : Set of synchronization labels (alphabet)
- E : Set of edges
- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **region** ψ : subset of \mathbb{R}^k
- For each location l :
 - Initial states: region $Init_l(X)$
 - Invariant: region $Inv_l(X)$
 - Continuous dynamics: $\frac{dX}{dt} \in flow_l(X)$
- For each edge e from location l to location l'
 - Guard: region $g(X) \geq 0$
 - Update relation “Jump” $J(X, X')$ over $\mathbb{R}^k \times \mathbb{R}^k$
 - Synchronization label $a \in \Sigma$ (communication information)

Remark: Degree of $flow_I(X)$

- Continuous dynamics described w.l.o.g. with sets of **degree-1** differential (in)equalities $flow_I(X)$
- Sets/conjunctions of higher-degree differential (in)equalities can be reduced to degree 1 by renaming
- Ex:

$$\left(a_1 \frac{d^2 s}{dt^2} + a_2 \frac{ds}{dt} + a_3 s + a_4 \bowtie 0 \right)$$

$$\downarrow$$

$$\left(v = \frac{ds}{dt} \right) \wedge \left(a_1 \frac{dv}{dt} + a_2 v + a_3 s + a_4 \bowtie 0 \right)$$

(Finite) Executions of Hybrid Automata

- State: pair $\langle I, X \rangle$ such that $X \in \text{Inv}_I(X)$

(Finite) Executions of Hybrid Automata

- State: pair $\langle I, X \rangle$ such that $X \in \text{Inv}_I(X)$
- Initialization: $\langle I, X \rangle$ such that $X \in \text{Init}_I(X)$

(Finite) Executions of Hybrid Automata

- State: pair $\langle I, X \rangle$ such that $X \in \text{Inv}_I(X)$
- Initialization: $\langle I, X \rangle$ such that $X \in \text{Init}_I(X)$
- Two types of state updates (transitions)


(Finite) Executions of Hybrid Automata

- State: pair $\langle l, X \rangle$ such that $X \in \text{Inv}_l(X)$
- Initialization: $\langle l, X \rangle$ such that $X \in \text{Init}_l(X)$
- Two types of state updates (transitions)
 - **Discrete switches:** $\langle l, X \rangle \xrightarrow{a} \langle l', X' \rangle$
 if there there is an a -labeled edge e from l to l' s.t.
 - X, X' satisfy $\text{Inv}_l(X)$ and $\text{Inv}_{l'}(X)$ respectively
 - X satisfies the guard of e (i.e. $g(X) \geq 0$) and
 - $\langle X, X' \rangle$ satisfies the jump condition of e (i.e., $\langle X, X' \rangle \in J(X, X')$)

(Finite) Executions of Hybrid Automata


- State: pair $\langle l, X \rangle$ such that $X \in \text{Inv}_l(X)$
- Initialization: $\langle l, X \rangle$ such that $X \in \text{Init}_l(X)$
- Two types of state updates (transitions)
 - **Discrete switches:** $\langle l, X \rangle \xrightarrow{a} \langle l', X' \rangle$
 if there there is an a -labeled edge e from l to l' s.t.
 - X, X' satisfy $\text{Inv}_l(X)$ and $\text{Inv}_{l'}(X)$ respectively
 - X satisfies the guard of e (i.e. $g(X) \geq 0$) and
 - $\langle X, X' \rangle$ satisfies the jump condition of e (i.e., $\langle X, X' \rangle \in J(X, X')$)
 - **Continuous flows:** $\langle l, X \rangle \xrightarrow{f} \langle l, X' \rangle$
 f is a continuous function in $[0, \delta]$ s.t.
 - $f(0) = X$
 - $f(\delta) = X'$
 - for every $t \in [0, \delta]$, $f(t) \in \text{Inv}_l(X)$
 - for every $t \in [0, \delta]$, $\frac{df(t)}{dt} \in \text{flow}_l(X)$

Example: Gate for a railroad controller

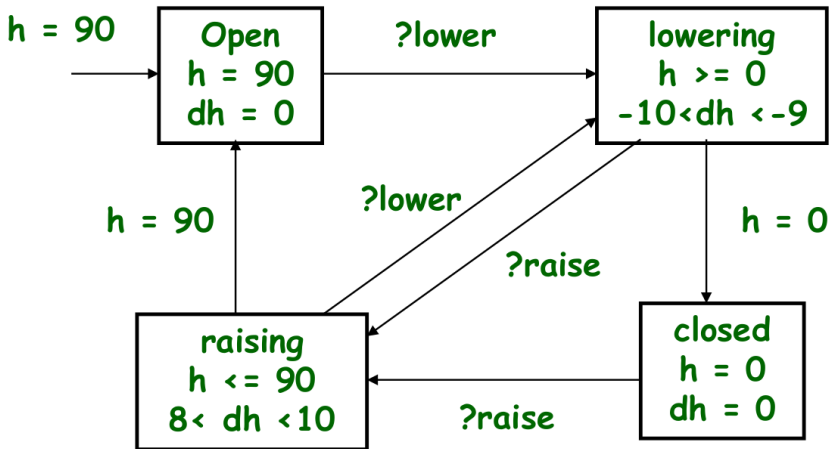

Notation: “ dh ” shortcut for “ $\frac{dh}{dt}$ ”

Example: Gate for a railroad controller

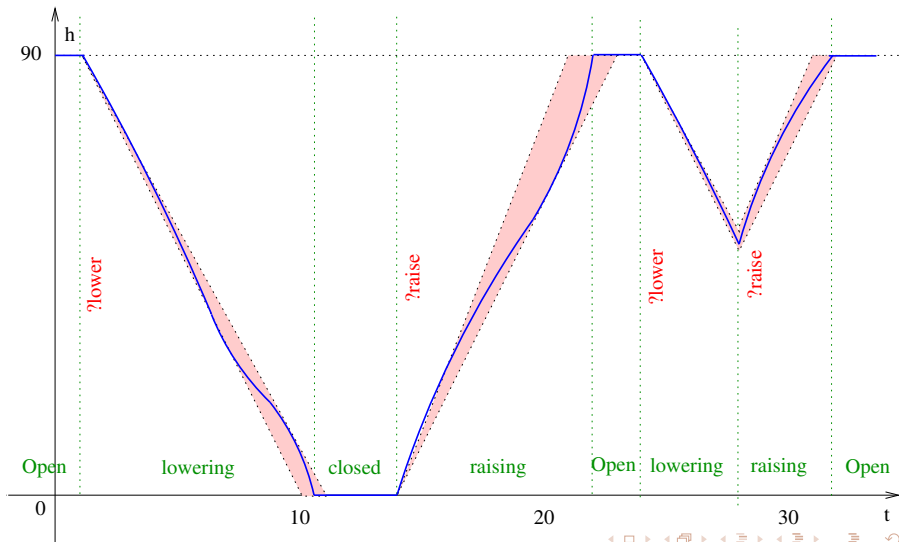

Outline

- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems**
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises

General Symbolic-Reachability Schema

```

1: R = I(X)
2: while (True) do
3:   if (R intersects F) then
4:     return True
5:   else
6:     if ( $Image(R) \subseteq R$ ) then
7:       return False
8:     else
9:        $R = R \cup Image(R)$ 
10:    end if
11:  end if
12: end while

```

- I: initial; F: Final; R: Reachable; Image(R): successors of R
- need a data type to represent state sets (regions)
- Termination may or may not be guaranteed

Symbolic Representations

- Necessary operations on Regions
 - Union
 - Intersection
 - Negation
 - Projection
 - Renaming
 - Equality/containment test
 - Emptiness test

Symbolic Representations


- Necessary operations on Regions
 - Union
 - Intersection
 - Negation
 - Projection
 - Renaming
 - Equality/containment test
 - Emptiness test
- Different choices for different classes of problems
 - BDDs for Boolean variables in hardware verification
 - DBMs in Timed automata
 - Polyhedra in Linear Hybrid Automata
 - ...

Reachability for Hybrid Systems

- Same algorithm works in principle
- Problem: What is a suitable representation of regions?
 - Region: subset of \mathbb{R}^k
 - Main problem: handling continuous dynamics
- Precise solutions available for restricted continuous dynamics
 - Timed automata
 - Multi-rate & Rectangular Hybrid Automata (reduced to Timed aut.)
 - Linear Hybrid Automata
- Even for linear systems, over-approximations of reachable set needed

Reachability Analysis for Dynamical Systems

- Goal: Given an initial region, compute whether a bad state can be reached
- Key step: compute $\text{Reach}(X)$ for a given set X under $\frac{dX}{dt} = f(X)$

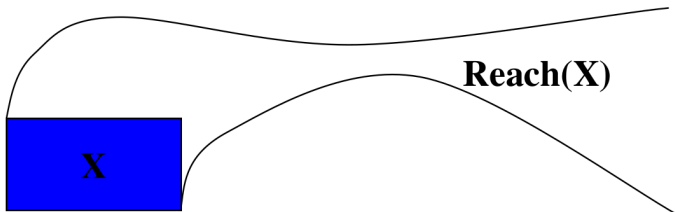

Notation: (hereafter we often use “ dX ” or “ \dot{X} ” as a shortcut of “ $\frac{dX}{dt}$ ”)

Outline

- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems**
 - Multi-Rate and Rectangular Hybrid Automata**
 - Linear Hybrid Automata
- 6 Exercises


Simple Hybrid Automata: Multi-Rate and Rectangular

Two simple forms of Hybrid Automata

- Multi-Rate Automata
- Rectangular Automata
- Idea: can be reduced to Timed Automata
- typically used as over-approximations of complex hybrid automata


Multi-rate Automata

- Modest extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} = \text{const}$
s.t. the rate of of each variable is the same in all locations
 - Guards and invariants: $x < \text{const}$, $x > \text{const}$
 - Resets: $x := \text{const}$




Multi-rate Automata

- Modest extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} = \text{const}$
s.t. the rate of of each variable is the same in all locations
 - Guards and invariants: $x < \text{const}$, $x > \text{const}$
 - Resets: $x := \text{const}$
- Simple translation to timed automata by shifting and scaling:




Multi-rate Automata

- Modest extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} = \text{const}$
s.t. the rate of of each variable is the same in all locations
 - Guards and invariants: $x < \text{const}$, $x > \text{const}$
 - Resets: $x := \text{const}$
- Simple translation to timed automata by shifting and scaling:
 - if $x_i := d_i$ then rename it with a fresh var v_i s.t. $v_i + d_i = x_i$




Multi-rate Automata

- Modest extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} = \text{const}$
s.t. the rate of of each variable is the same in all locations
 - Guards and invariants: $x < \text{const}$, $x > \text{const}$
 - Resets: $x := \text{const}$
- Simple translation to timed automata by shifting and scaling:
 - if $x_j := d_j$ then rename it with a fresh var v_j s.t. $v_j + d_j = x_j$
 - if $\frac{dx_j}{dt} = c_j$, then rename it with a fresh var u_j s.t. $c_j \cdot u_j = x_j$




Multi-rate Automata

- Modest extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} = \text{const}$
s.t. the rate of of each variable is the same in all locations
 - Guards and invariants: $x < \text{const}$, $x > \text{const}$
 - Resets: $x := \text{const}$
- Simple translation to timed automata by shifting and scaling:
 - if $x_j := d_j$ then rename it with a fresh var v_j s.t. $v_j + d_j = x_j$
 - if $\frac{dx_j}{dt} = c_j$, then rename it with a fresh var u_j s.t. $c_j \cdot u_j = x_j$
 - shift & rescale constants in constraints accordingly




Rectangular Automata (simplified)

- More interesting extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} \in [\text{const1}, \text{const2}]$
s.t. the rate of each variable is the same in all locations
 - Guards and invariants: $x < \text{const}$, $x > \text{const}$
 - Jumps: $x := \text{const}$




Rectangular Automata (simplified)

- More interesting extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} \in [const1, const2]$
s.t. the rate of each variable is the same in all locations
 - Guards and invariants: $x < const$, $x > const$
 - Jumps: $x := const$
- Translation to multi-rate automata (hints). For each x :




Rectangular Automata (simplified)

- More interesting extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} \in [\text{const1}, \text{const2}]$
s.t. the rate of each variable is the same in all locations
 - Guards and invariants: $x < \text{const}$, $x > \text{const}$
 - Jumps: $x := \text{const}$
- Translation to multi-rate automata (hints). For each x :
 - Introduce x_M, x_m describing the greatest/least possible x values

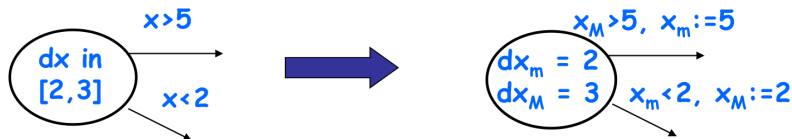


Rectangular Automata (simplified)

- More interesting extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} \in [const1, const2]$
s.t. the rate of each variable is the same in all locations
 - Guards and invariants: $x < const$, $x > const$
 - Jumps: $x := const$
- Translation to multi-rate automata (hints). For each x :
 - Introduce x_M, x_m describing the greatest/least possible x values
 - flow: substitute $\dot{x} < c_u$ with $\dot{x}_M = c_u$ and $\dot{x} > c_l$ with $\dot{x}_m = c_l$




Rectangular Automata (simplified)

- More interesting extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} \in [const1, const2]$
s.t. the rate of each variable is the same in all locations
 - Guards and invariants: $x < const$, $x > const$
 - Jumps: $x := const$
- Translation to multi-rate automata (hints). For each x :
 - Introduce x_M, x_m describing the greatest/least possible x values
 - flow: substitute $\dot{x} < c_u$ with $\dot{x}_M = c_u$ and $\dot{x} > c_l$ with $\dot{x}_m = c_l$
 - invariants: substitute $Inv_I(x)$ with $Inv_I(x_M), Inv_I(x_m)$




Rectangular Automata (simplified)

- More interesting extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} \in [const1, const2]$
s.t. the rate of each variable is the same in all locations
 - Guards and invariants: $x < const$, $x > const$
 - Jumps: $x := const$
- Translation to multi-rate automata (hints). For each x :
 - Introduce x_M, x_m describing the greatest/least possible x values
 - flow: substitute $\dot{x} < c_u$ with $\dot{x}_M = c_u$ and $\dot{x} > c_l$ with $\dot{x}_m = c_l$
 - invariants: substitute $Inv_I(x)$ with $Inv_I(x_M), Inv_I(x_m)$
 - guards: substitute $x > c$ with $x_M > c$, add jump $x_m := c$ (if none)
substitute $x < c$ with $x_m < c$, add jump $x_M := c$ (if none)



Rectangular Automata (simplified)

- More interesting extension of timed automata
 - Dynamics of the form $\frac{dx}{dt} \in [const1, const2]$
s.t. the rate of each variable is the same in all locations
 - Guards and invariants: $x < const$, $x > const$
 - Jumps: $x := const$
- Translation to multi-rate automata (hints). For each x :
 - Introduce x_M, x_m describing the greatest/least possible x values
 - flow: substitute $\dot{x} < c_u$ with $\dot{x}_M = c_u$ and $\dot{x} > c_l$ with $\dot{x}_m = c_l$
 - invariants: substitute $Inv_I(x)$ with $Inv_I(x_M), Inv_I(x_m)$
 - guards: substitute $x > c$ with $x_M > c$, add jump $x_m := c$ (if none)
substitute $x < c$ with $x_m < c$, add jump $x_M := c$ (if none)
 - jump: if $x := c$, then both $x_M := c$ and $x_m := c$

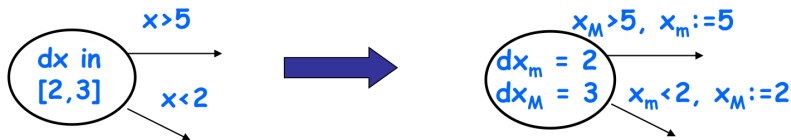

Outline


- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems**
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata**
- 6 Exercises

Linear Hybrid Automata

- **Polyhedron** φ : set/conjunction of linear inequalities on X in the form $(A \cdot X \geq B)$, s.t. $A \in \mathbb{R}^m \times \mathbb{R}^k$ and $B \in \mathbb{R}^m$ for some m .

Linear Hybrid Automata


- **Polyhedron** φ : set/conjunction of linear inequalities on X in the form $(A \cdot X \geq B)$, s.t. $A \in \mathbb{R}^m \times \mathbb{R}^k$ and $B \in \mathbb{R}^m$ for some m .
- φ is a convex set in the k -dimensional euclidean space
 - possibly unbounded

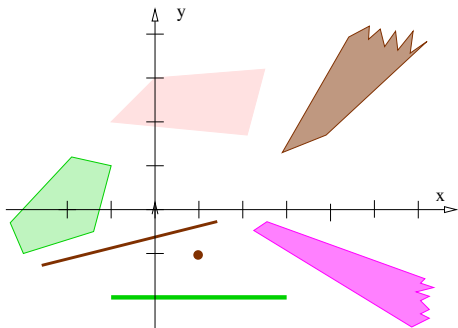

Linear Hybrid Automata

- **Polyhedron** φ : set/conjunction of linear inequalities on X in the form $(A \cdot X \geq B)$, s.t. $A \in \mathbb{R}^m \times \mathbb{R}^k$ and $B \in \mathbb{R}^m$ for some m .
- φ is a convex set in the k -dimensional euclidean space
 - possibly unbounded

\Rightarrow Contains all possible values for all variables in a set

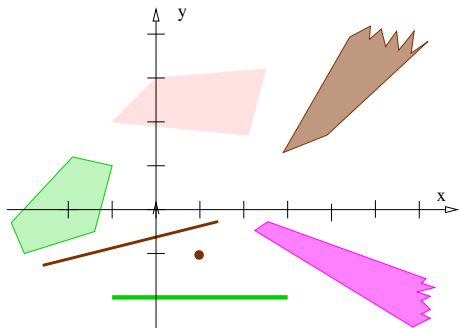

Linear Hybrid Automata


- **Polyhedron** φ : set/conjunction of linear inequalities on X in the form $(A \cdot X \geq B)$, s.t. $A \in \mathbb{R}^m \times \mathbb{R}^k$ and $B \in \mathbb{R}^m$ for some m .
- φ is a convex set in the k -dimensional euclidean space
 - possibly unbounded

⇒ Contains all possible values for all variables in a set

- **Symbolic state**: $\langle I, \varphi \rangle$

- I : location
- φ : polyhedron

(generalization of zone automata)

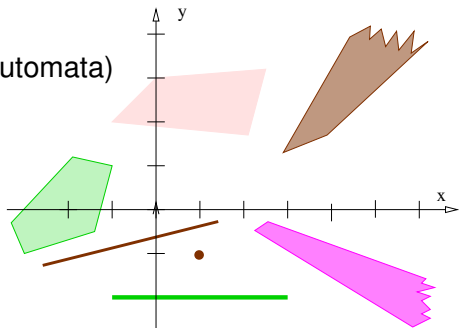

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,
 - state: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **polyhedron** ψ : subset of \mathbb{R}^k in the form $A \cdot X \geq B$

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **polyhedron** ψ : subset of \mathbb{R}^k in the form $A \cdot X \geq B$
- For each edge e from location l to location l'

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **polyhedron** ψ : subset of \mathbb{R}^k in the form $A \cdot X \geq B$
- For each edge e from location l to location l'
 - Guard: region $(A \cdot X \geq B)$: polyhedron on X

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **polyhedron** ψ : subset of \mathbb{R}^k in the form $A \cdot X \geq B$
- For each edge e from location l to location l'
 - Guard: region $(A \cdot X \geq B)$: polyhedron on X
 - Update relation “Jump” $J(X, X')$: $X' := T \cdot X$, $T \in \mathbb{R}^k \times \mathbb{R}^k$

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **polyhedron** ψ : subset of \mathbb{R}^k in the form $A \cdot X \geq B$
- For each edge e from location l to location l'
 - Guard: region $(A \cdot X \geq B)$: polyhedron on X
 - Update relation “Jump” $J(X, X')$: $X' := T \cdot X$, $T \in \mathbb{R}^k \times \mathbb{R}^k$
 - Synchronization label $a \in \Sigma$ (communication information)

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **polyhedron** ψ : subset of \mathbb{R}^k in the form $A \cdot X \geq B$
- For each edge e from location l to location l'
 - Guard: region $(A \cdot X \geq B)$: polyhedron on X
 - Update relation “Jump” $J(X, X')$: $X' := T \cdot X$, $T \in \mathbb{R}^k \times \mathbb{R}^k$
 - Synchronization label $a \in \Sigma$ (communication information)
- For each location l :

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **polyhedron** ψ : subset of \mathbb{R}^k in the form $A \cdot X \geq B$
- For each edge e from location l to location l'
 - Guard: region ($A \cdot X \geq B$): polyhedron on X
 - Update relation “Jump” $J(X, X')$: $X' := T \cdot X$, $T \in \mathbb{R}^k \times \mathbb{R}^k$
 - Synchronization label $a \in \Sigma$ (communication information)
- For each location l :
 - Initial states: region $Init_l(X)$: polyhedron on X

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **polyhedron** ψ : subset of \mathbb{R}^k in the form $A \cdot X \geq B$
- For each edge e from location l to location l'
 - Guard: region $(A \cdot X \geq B)$: polyhedron on X
 - Update relation “Jump” $J(X, X')$: $X' := T \cdot X$, $T \in \mathbb{R}^k \times \mathbb{R}^k$
 - Synchronization label $a \in \Sigma$ (communication information)
- For each location l :
 - Initial states: region $Init_l(X)$: polyhedron on X
 - Invariant: region $Inv_l(X)$: polyhedron on X

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$

- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **polyhedron** ψ : subset of \mathbb{R}^k in the form $A \cdot X \geq B$
- For each edge e from location l to location l'
 - Guard: region $(A \cdot X \geq B)$: polyhedron on X
 - Update relation “Jump” $J(X, X')$: $X' := T \cdot X$, $T \in \mathbb{R}^k \times \mathbb{R}^k$
 - Synchronization label $a \in \Sigma$ (communication information)
- For each location l :
 - Initial states: region $Init_l(X)$: polyhedron on X
 - Invariant: region $Inv_l(X)$: polyhedron on X
 - **Continuous dynamics** $flow_l(X)$: polyhedron on $\frac{dX}{dt}$

Linear Hybrid Automata $A = \langle L, L^0, X, \Sigma, \Phi(X), E \rangle$


- State space: $L \times \mathbb{R}^k$,
 - **state**: $\langle l, \psi \rangle$ s.t. $l \in L$ and $\psi \in \mathbb{R}^k$
 - **polyhedron** ψ : subset of \mathbb{R}^k in the form $A \cdot X \geq B$
- For each edge e from location l to location l'
 - Guard: region $(A \cdot X \geq B)$: polyhedron on X
 - Update relation “Jump” $J(X, X')$: $X' := T \cdot X$, $T \in \mathbb{R}^k \times \mathbb{R}^k$
 - Synchronization label $a \in \Sigma$ (communication information)
- For each location l :
 - Initial states: region $Init_l(X)$: polyhedron on X
 - Invariant: region $Inv_l(X)$: polyhedron on X
 - **Continuous dynamics** $flow_l(X)$: polyhedron on $\frac{dX}{dt}$

Continuous Dynamics

Time-invariant, state-independent dynamics specified by a convex polyhedron constraining first derivatives

Es: $\frac{dx}{dt} \geq 3$, $\frac{dx}{dt} = \frac{dy}{dt}$, $2.1 \frac{dx}{dt} - 3.5 \frac{dy}{dt} + 1.7 \frac{dz}{dt} \geq 3.1$, ...

Example: Gate for a railroad controller

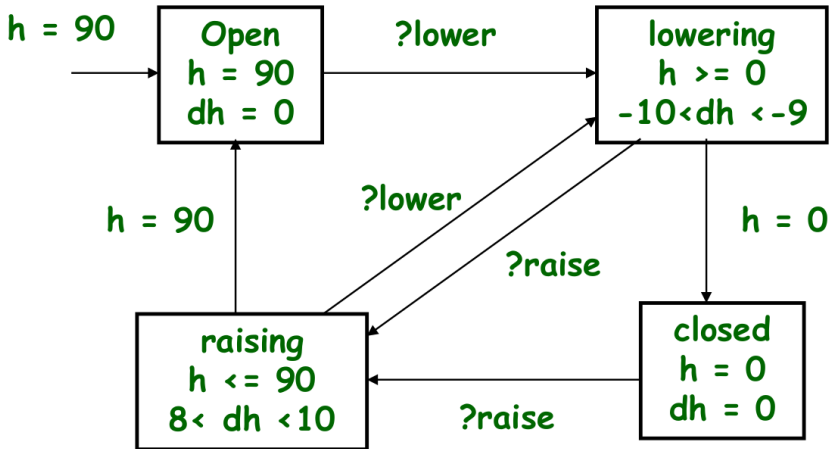

Reachability Computation: Key Steps

- Compute “discrete” successors of $\langle I, \psi \rangle$

Reachability Computation: Key Steps

- Compute “discrete” successors of $\langle I, \psi \rangle$
- Compute “continuous” successor of $\langle I, \psi \rangle$

Reachability Computation: Key Steps

- Compute “discrete” successors of $\langle I, \psi \rangle$
- Compute “continuous” successor of $\langle I, \psi \rangle$
- Check if ψ intersects with “bad” region

Reachability Computation: Key Steps

- Compute “discrete” successors of $\langle I, \psi \rangle$
- Compute “continuous” successor of $\langle I, \psi \rangle$
- Check if ψ intersects with “bad” region
- Check if newly found ψ is covered by already visited polyhedra ψ_1, \dots, ψ_n (expensive!)

Computing Discrete Successors of $\langle I, \psi \rangle$

- Intersect ψ with the guard ϕ
 \implies result is a polyhedron

Computing Discrete Successors of $\langle I, \psi \rangle$



- Intersect ψ with the guard ϕ
 \implies result is a polyhedron
- Apply linear transformation of J to the result
 \implies result is a polyhedron

Computing Discrete Successors of $\langle I, \psi \rangle$

- Intersect ψ with the guard ϕ
 \implies result is a polyhedron
- Apply linear transformation of J to the result
 \implies result is a polyhedron
- Intersect with the invariant of target location I'
 \implies result is a polyhedron



Computing Time Successor

- Consider maximum and minimum rates between derivatives (external vertices in the flow polyhedron)

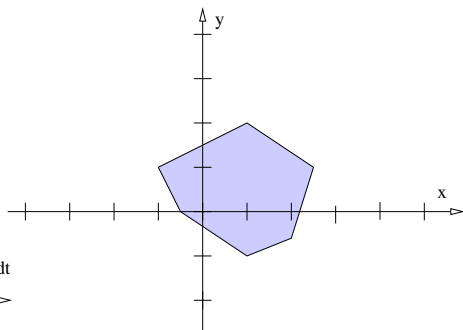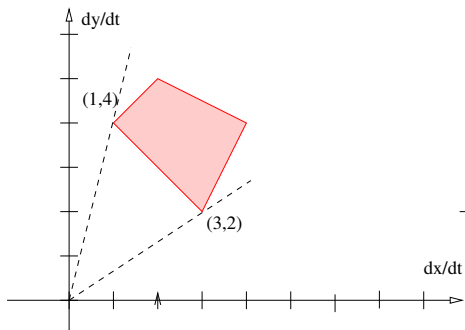

Computing Time Successor

- Consider maximum and minimum rates between derivatives (external vertices in the flow polyhedron)
- Apply these extremal rates for computing the projection to infinity (to be intersected with invariant)
 - Hint: $\frac{dx}{dy} = \frac{\frac{dx}{dt}}{\frac{dy}{dt}}$, s.t. $\max_{x,y} \frac{dx}{dy} = \max_{x,y} \frac{\frac{dx}{dt}}{\frac{dy}{dt}}$ and $\min_{x,y} \frac{dx}{dy} = \min_{x,y} \frac{\frac{dx}{dt}}{\frac{dy}{dt}}$

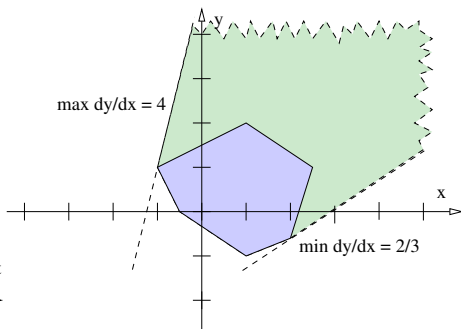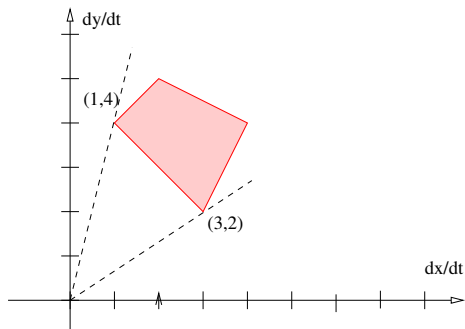

Linear Hybrid Automata: Symbolic Transitions

Definition: $\text{succ}(\varphi, e)$

- Let $e \stackrel{\text{def}}{=} \langle l, a, \psi, J, l' \rangle$, and ϕ, ϕ' the invariants in l, l'
- Then

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J(((\varphi \wedge \phi) \uparrow \wedge \phi) \wedge \psi)$$


(φ immediately before entering the location)

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

(φ immediately after entering the location):

- \wedge : standard conjunction/intersection
- \uparrow : continuous successor $\psi \uparrow$
- J : Jump transformation $J(X) \stackrel{\text{def}}{=} T \cdot X$
- note: φ is considered “immediately after entering l' ”


Linear Hybrid Automata: Symbolic Transitions (cont.)

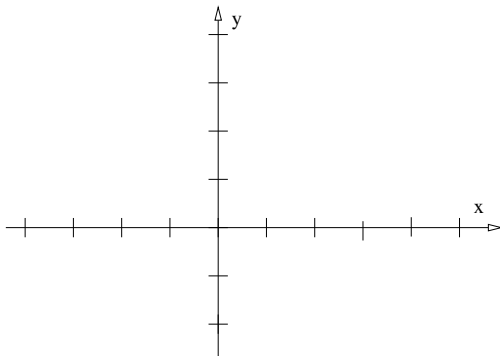

$$\mathit{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l

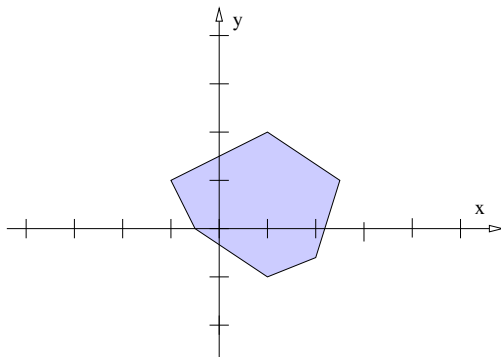

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l
- **Projection to infinity**

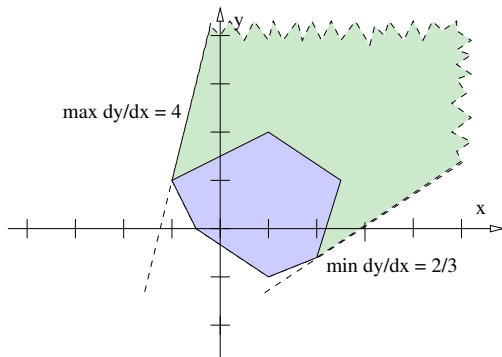

$$\mathit{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l
- **Projection to infinity**: ... after waiting unbounded time

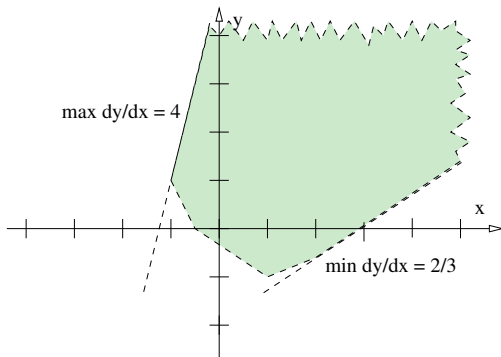

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l
- **Projection to infinity**: ... after waiting unbounded time
- **Intersection with invariant** ϕ

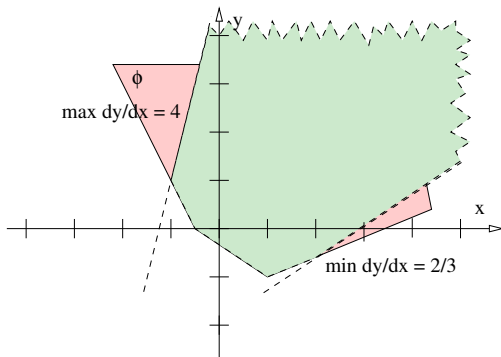

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l
- **Projection to infinity**: ... after waiting unbounded time
- **Intersection with invariant ϕ** : ... waiting a legal amount of time

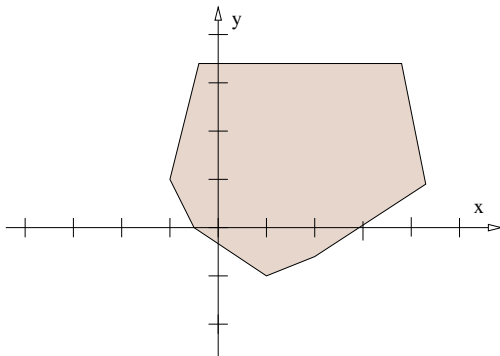

$$\mathit{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l
- **Projection to infinity**: ... after waiting unbounded time
- **Intersection with invariant ϕ** : ... waiting a legal amount of time
- **Intersection with guard ψ**

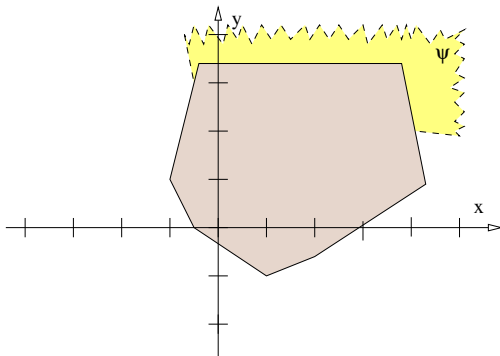

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l
- **Projection to infinity**: ... after waiting unbounded time
- **Intersection with invariant ϕ** : ... waiting a legal amount of time
- **Intersection with guard ψ** : ... from which the switch can be shot

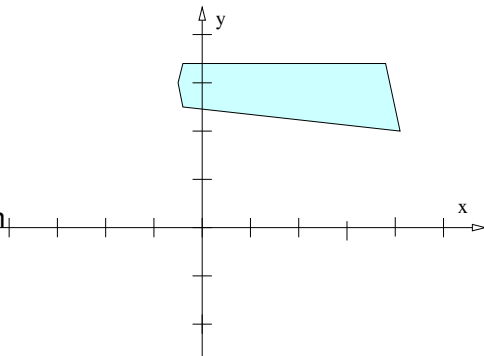

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l
- **Projection to infinity**: ... after waiting unbounded time
- **Intersection with invariant ϕ** : ... waiting a legal amount of time
- **Intersection with guard ψ** : ... from which the switch can be shot
- **Jump J**

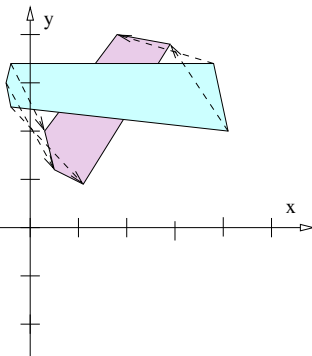

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l
- **Projection to infinity**: ... after waiting unbounded time
- **Intersection with invariant ϕ** : ... waiting a legal amount of time
- **Intersection with guard ψ** : ... from which the switch can be shot
- **Jump J** : ..., after jump

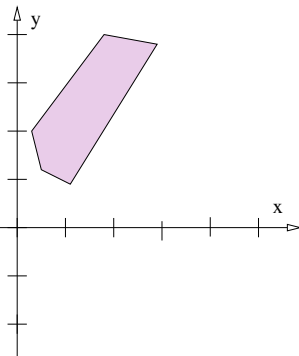

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l
- **Projection to infinity**: ... after waiting unbounded time
- **Intersection with invariant ϕ** : ... waiting a legal amount of time
- **Intersection with guard ψ** : ... from which the switch can be shot
- **Jump J** : ..., after jump
- **Intersection with invariant ϕ'**

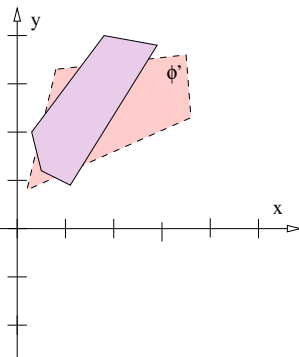

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)


- **Initial zone**: values allowed to enter location l
- **Projection to infinity**: ... after waiting unbounded time
- **Intersection with invariant ϕ** : ... waiting a legal amount of time
- **Intersection with guard ψ** : ... from which the switch can be shot
- **Jump J** : ..., after jump
- **Intersection with invariant ϕ'** : ... values allowed to enter location l'

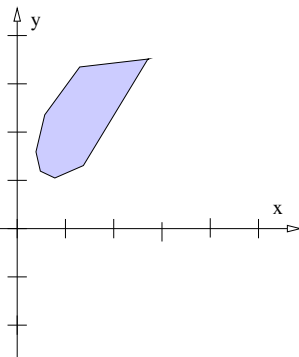

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Linear Hybrid Automata: Symbolic Transitions (cont.)

- **Initial zone**: values allowed to enter location l
- **Projection to infinity**: ... after waiting unbounded time
- **Intersection with invariant ϕ** : ... waiting a legal amount of time
- **Intersection with guard ψ** : ... from which the switch can be shot
- **Jump J** : ..., after jump
- **Intersection with invariant ϕ'** : ... values allowed to enter location l'

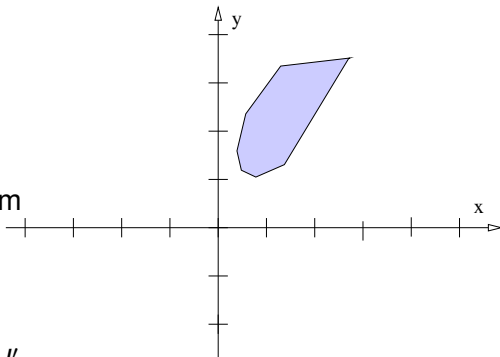

⇒ Final!

$$\text{succ}(\varphi, e) \stackrel{\text{def}}{=} J((\varphi \uparrow \wedge \phi) \wedge \psi) \wedge \phi'$$

Symbolic Reachability Analysis

```

1: function Reachable ( $A, F$ ) //  $A \stackrel{\text{def}}{=} \langle L, L^0, \Sigma, X, \Phi(X), E \rangle, F \stackrel{\text{def}}{=} \{ \langle I_i, \phi_i \rangle \}_i$ 
2: Reachable =  $\emptyset$ 
3: Frontier =  $\{ \langle I, \text{Init}_I(X) \rangle \mid I \in L^0 \}$ 
4: while (Frontier  $\neq \emptyset$ ) do
5:   extract  $\langle I, \varphi \rangle$  from Frontier
6:   if  $((\varphi \wedge \phi) \neq \perp$  for some  $\langle I, \phi \rangle \in F$ ) then
7:     return True
8:   end if
9:   if  $(\exists \langle I, \varphi' \rangle \in \textit{Reachable}$  s.t.  $\varphi \subseteq \varphi')$  then
10:    add  $\langle I, \varphi \rangle$  to Reachable
11:    for  $e \in \textit{outcoming}(I)$  do
12:      add succ $(\varphi, e)$  to Frontier
13:    end for
14:  end if
15: end while
16: return False

```

Summary: Linear Hybrid Automata


- Strategy implemented in HyTech
- Core computation: manipulation of polyhedra
- Bottlenecks
 - proliferation of polyhedra (unions)
 - computing with high-dimension polyhedra
- Many case studies

Outline

- 1 Motivations
- 2 Timed systems: Modeling and Semantics
 - Timed automata
- 3 Symbolic Reachability for Timed Systems
 - Making the state space finite
 - Region automata
 - Zone automata
- 4 Hybrid Systems: Modeling and Semantics
 - Hybrid automata
- 5 Symbolic Reachability for Hybrid Systems
 - Multi-Rate and Rectangular Hybrid Automata
 - Linear Hybrid Automata
- 6 Exercises


Ex: Execution of a Timed System

Consider only the following piece of a timed automaton A, x_1 and x_2 being clocks.

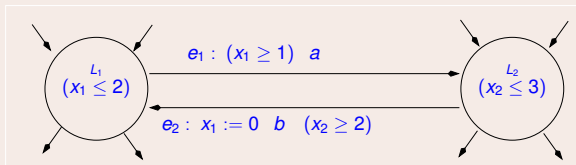

Ex: Execution of a Timed System


Consider only the following piece of a timed automaton A, x_1 and x_2 being clocks.

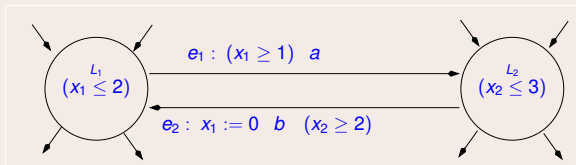

- (a) In general, what is the minimum amount of time from an occurrence of event b and the subsequent occurrence of the event a ?

Ex: Execution of a Timed System


Consider only the following piece of a timed automaton A, x_1 and x_2 being clocks.

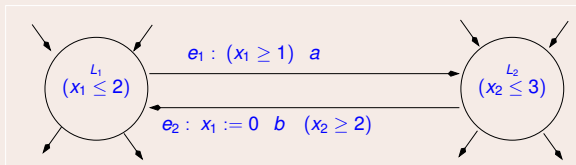

- (a) In general, what is the minimum amount of time from an occurrence of event b and the subsequent occurrence of the event a ? [**Solution: 1 time unit.**]

Ex: Execution of a Timed System


Consider only the following piece of a timed automaton A, x_1 and x_2 being clocks.

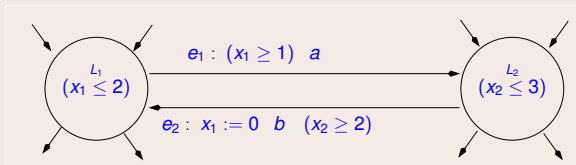

- (a) In general, what is the minimum amount of time from an occurrence of event b and the subsequent occurrence of the event a ? [**Solution: 1 time unit.**]
- (b) Write a legal execution from state $\langle L_1, 0.0, 2.0 \rangle$ to state $\langle L_1, 0.0, 3.0 \rangle$.

Ex: Execution of a Timed System


Consider only the following piece of a timed automaton A, x_1 and x_2 being clocks.

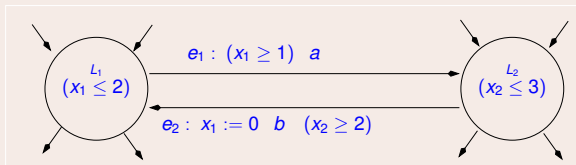

- (a) In general, what is the minimum amount of time from an occurrence of event b and the subsequent occurrence of the event a ? [Solution: 1 time unit.]
- (b) Write a legal execution from state $\langle L_1, 0.0, 2.0 \rangle$ to state $\langle L_1, 0.0, 3.0 \rangle$. [Solution: $\langle L_1, 0.0, 2.0 \rangle \xrightarrow{1.0} \langle L_1, 1.0, 3.0 \rangle \xrightarrow{a} \langle L_2, 1.0, 3.0 \rangle \xrightarrow{0.0} \langle L_2, 1.0, 3.0 \rangle \xrightarrow{b} \langle L_1, 0.0, 3.0 \rangle$]

Ex: Execution of a Timed System


Consider only the following piece of a timed automaton A, x_1 and x_2 being clocks.

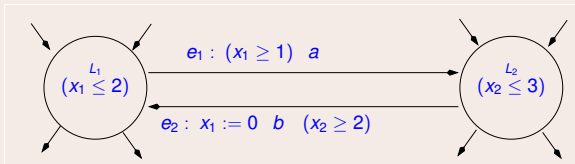

- (a) In general, what is the minimum amount of time from an occurrence of event b and the subsequent occurrence of the event a ? [Solution: 1 time unit.]
- (b) Write a legal execution from state $\langle L_1, 0.0, 2.0 \rangle$ to state $\langle L_1, 0.0, 3.0 \rangle$. [Solution: $\langle L_1, 0.0, 2.0 \rangle \xrightarrow{1.0} \langle L_1, 1.0, 3.0 \rangle \xrightarrow{a} \langle L_2, 1.0, 3.0 \rangle \xrightarrow{0.0} \langle L_2, 1.0, 3.0 \rangle \xrightarrow{b} \langle L_1, 0.0, 3.0 \rangle$]
- (c) Is it possible to have a legal execution in which switches e_2, e_1, e_2 are shot consecutively (possibly interleaved by time elapses), without being interleaved by other switches? If yes, write one such execution. If not, explain why.

Ex: Execution of a Timed System


Consider only the following piece of a timed automaton A, x_1 and x_2 being clocks.

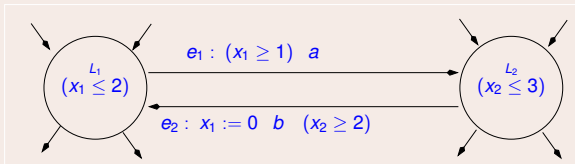

- (a) In general, what is the minimum amount of time from an occurrence of event b and the subsequent occurrence of the event a ? [Solution: 1 time unit.]
- (b) Write a legal execution from state $\langle L_1, 0.0, 2.0 \rangle$ to state $\langle L_1, 0.0, 3.0 \rangle$. [Solution: $\langle L_1, 0.0, 2.0 \rangle \xrightarrow{1.0} \langle L_1, 1.0, 3.0 \rangle \xrightarrow{a} \langle L_2, 1.0, 3.0 \rangle \xrightarrow{0.0} \langle L_2, 1.0, 3.0 \rangle \xrightarrow{b} \langle L_1, 0.0, 3.0 \rangle$]
- (c) Is it possible to have a legal execution in which switches e_2, e_1, e_2 are shot consecutively (possibly interleaved by time elapses), without being interleaved by other switches? If yes, write one such execution. If not, explain why. [Solution: Yes: $\langle L_2, \dots, 2.0 \rangle \xrightarrow{b} \langle L_1, 0.0, 2.0 \rangle \xrightarrow{1.0} \langle L_1, 1.0, 3.0 \rangle \xrightarrow{a} \langle L_2, 1.0, 3.0 \rangle \xrightarrow{0.0} \langle L_2, 1.0, 3.0 \rangle \xrightarrow{b} \langle L_1, 0.0, 3.0 \rangle$]
- Note: if the guard of e_2 were strictly greater than 2, this would not be possible.]

Ex: Timed Automata: Regions

Consider the following timed automaton A.

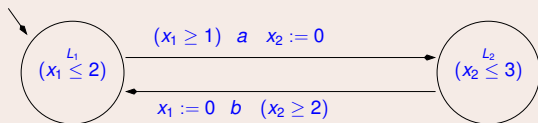


Consider the corresponding Region automaton $R(A)$. For each of the following pairs of states of A, say if the two states belong to the same region.

- (a) $s_0 = (L_1, 2.5, 3.2)$, $s_1 = (L_1, 2.5, 3.7)$
- (b) $s_0 = (L_1, 1.5, 2.2)$, $s_1 = (L_1, 1.5, 2.7)$
- (c) $s_0 = (L_2, 0.5, 1.4)$, $s_1 = (L_2, 0.5, 1.0)$
- (d) $s_0 = (L_2, 1.7, 0.5)$, $s_1 = (L_2, 1.5, 0.1)$

Ex: Timed Automata: Regions

Consider the following timed automaton A.

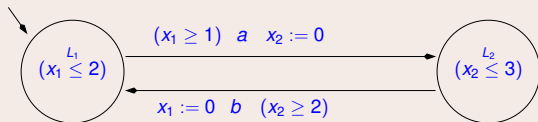

Consider the corresponding Region automaton $R(A)$. For each of the following pairs of states of A, say if the two states belong to the same region.


(a) $s_0 = (L_1, 2.5, 3.2)$, $s_1 = (L_1, 2.5, 3.7)$

[Solution: yes]

(b) $s_0 = (L_1, 1.5, 2.2)$, $s_1 = (L_1, 1.5, 2.7)$


(c) $s_0 = (L_2, 0.5, 1.4)$, $s_1 = (L_2, 0.5, 1.0)$

(d) $s_0 = (L_2, 1.7, 0.5)$, $s_1 = (L_2, 1.5, 0.1)$



Ex: Timed Automata: Regions

Consider the following timed automaton A.

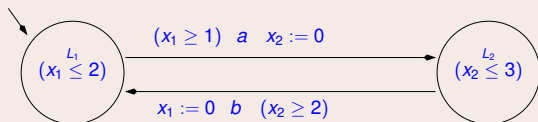

Consider the corresponding Region automaton $R(A)$. For each of the following pairs of states of A, say if the two states belong to the same region.

(a) $s_0 = (L_1, 2.5, 3.2)$, $s_1 = (L_1, 2.5, 3.7)$


[Solution: yes]

(b) $s_0 = (L_1, 1.5, 2.2)$, $s_1 = (L_1, 1.5, 2.7)$

[Solution: no]


(c) $s_0 = (L_2, 0.5, 1.4)$, $s_1 = (L_2, 0.5, 1.0)$

(d) $s_0 = (L_2, 1.7, 0.5)$, $s_1 = (L_2, 1.5, 0.1)$



Ex: Timed Automata: Regions

Consider the following timed automaton A.

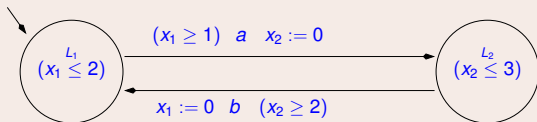


Consider the corresponding Region automaton $R(A)$. For each of the following pairs of states of A, say if the two states belong to the same region.

(a) $s_0 = (L_1, 2.5, 3.2)$, $s_1 = (L_1, 2.5, 3.7)$
 [Solution: yes]

(b) $s_0 = (L_1, 1.5, 2.2)$, $s_1 = (L_1, 1.5, 2.7)$
 [Solution: no]


(c) $s_0 = (L_2, 0.5, 1.4)$, $s_1 = (L_2, 0.5, 1.0)$
 [Solution: no]

(d) $s_0 = (L_2, 1.7, 0.5)$, $s_1 = (L_2, 1.5, 0.1)$



Ex: Timed Automata: Regions

Consider the following timed automaton A.

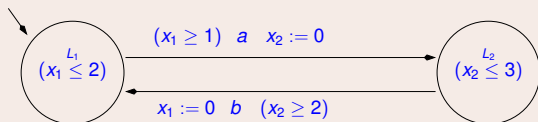

Consider the corresponding Region automaton $R(A)$. For each of the following pairs of states of A, say if the two states belong to the same region.

(a) $s_0 = (L_1, 2.5, 3.2)$, $s_1 = (L_1, 2.5, 3.7)$

[Solution: yes]

(b) $s_0 = (L_1, 1.5, 2.2)$, $s_1 = (L_1, 1.5, 2.7)$


[Solution: no]

(c) $s_0 = (L_2, 0.5, 1.4)$, $s_1 = (L_2, 0.5, 1.0)$

[Solution: no]


(d) $s_0 = (L_2, 1.7, 0.5)$, $s_1 = (L_2, 1.5, 0.1)$

[Solution: yes]



Ex: Timed Automata: Zones


Consider the following switch e in a timed automaton, x and y being clocks:

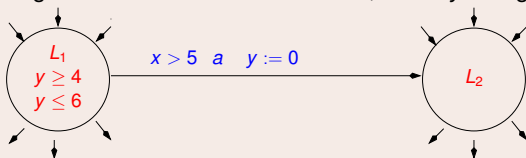

and let $Z_1 \stackrel{\text{def}}{=} \langle L_1, \varphi \rangle$ s.t. $\varphi \stackrel{\text{def}}{=} (x \geq 2) \wedge (x \leq 3) \wedge (y \geq 2) \wedge (y \leq 5) \wedge (y - x \leq 2)$.
 Compute $\text{succ}(Z_1, e)$, drawing the process on the cartesian space $\langle x, y \rangle$.


Ex: Timed Automata: Zones

Consider the following switch e in a timed automaton, x and y being clocks:

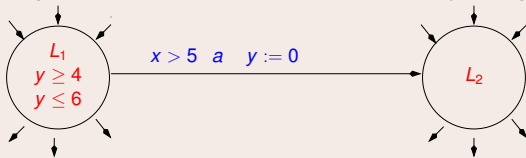

and let $Z_1 \stackrel{\text{def}}{=} \langle L_1, \varphi \rangle$ s.t. $\varphi \stackrel{\text{def}}{=} (x \geq 2) \wedge (x \leq 3) \wedge (y \geq 2) \wedge (y \leq 5) \wedge (y - x \leq 2)$.
 Compute $\text{succ}(Z_1, e)$, drawing the process on the cartesian space $\langle x, y \rangle$.

[Solution: The solution is $\text{succ}(Z_1, e) = \langle Z_2, \perp \rangle$. In fact, the zone reached by waiting in L_1 has empty intersection with the guard, as displayed in figure:




Hybrid Automata

A railway-crossing gate, whose dynamics is represented by the hybrid automaton in the figure, receives from a controller two possible input signals {lower,raise}. (θ , in degrees, represents the angle between the bar and the ground.)

When the gate is open the controller receives a signal “incoming” when a train is incoming, it waits a fixed amount of time Δt , then it sends the gate the lower order. It is known that an incoming train takes an amount of time within the interval $[70,100]$ time units to get from the remote sensor to the gate.

Compute the *maximum* amount of time Δt which guarantees that the train does not reach the gate before the bar is completely lowered, and briefly explain why.

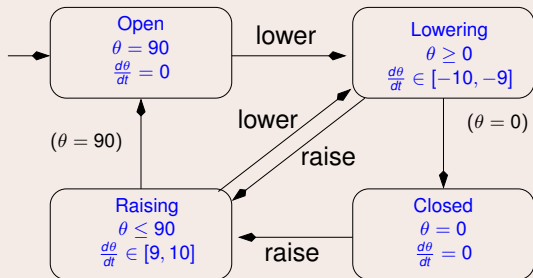

Hybrid Automata

[Solution: Δt is 60 time units. In fact, the maximum value of Δt the controller can afford waiting is given by the minimum time the train may take to reach the gate (70), minus the maximum time taken by the bar to lower, that is, the time taken to lower the angle from 90 to 0 at the lowest absolute speed ($90/|-9|$). Overall, we have thus $\Delta t = 70 - 90/(|-9|) = 60$.]

Difference Bound Matrices

Consider the zone:

$$\varphi \stackrel{\text{def}}{=} (x_1 \leq 3) \wedge (x_2 \leq 2) \wedge (x_3 \leq 5) \wedge \\ (x_1 - x_3 \leq 2) \wedge (x_2 - x_1 \leq -2) \wedge (x_3 - x_1 \leq 3) \wedge (x_3 - x_2 \leq 1)$$

- (a) Compute the corresponding DBM
- (b) Compute the reduced DBM

Difference Bound Matrices

[Solution: $\varphi \stackrel{\text{def}}{=} (x_1 \leq 3) \wedge (x_2 \leq 2) \wedge (x_3 \leq 5) \wedge$
 $(x_1 - x_3 \leq 2) \wedge (x_2 - x_1 \leq -2) \wedge (x_3 - x_1 \leq 3) \wedge (x_3 - x_2 \leq 1)$


]

Difference Bound Matrices

[Solution: $\varphi \stackrel{\text{def}}{=} (x_1 \leq 3) \wedge (x_2 \leq 2) \wedge (x_3 \leq 5) \wedge$
 $(x_1 - x_3 \leq 2) \wedge (x_2 - x_1 \leq -2) \wedge (x_3 - x_1 \leq 3) \wedge (x_3 - x_2 \leq 1)$

Initial DBM:

	x_0	x_1	x_2	x_3
x_0	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$
x_1	$\langle 3, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle 2, \leq \rangle$
x_2	$\langle 2, \leq \rangle$	$\langle -2, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$
x_3	$\langle 5, \leq \rangle$	$\langle 3, \leq \rangle$	$\langle 1, \leq \rangle$	$\langle \infty, \leq \rangle$



]



Difference Bound Matrices

[Solution: $\varphi \stackrel{\text{def}}{=} (x_1 \leq 3) \wedge (x_2 \leq 2) \wedge (x_3 \leq 5) \wedge$
 $(x_1 - x_3 \leq 2) \wedge (x_2 - x_1 \leq -2) \wedge (x_3 - x_1 \leq 3) \wedge (x_3 - x_2 \leq 1)$

Initial DBM:

	x_0	x_1	x_2	x_3		x_0	x_1	x_2	x_3
x_0	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$	x_0	$\langle 0, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$
x_1	$\langle 3, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle 2, \leq \rangle$	x_1	$\langle 3, \leq \rangle$	$\langle 0, \leq \rangle$	$\langle 3, \leq \rangle$	$\langle 2, \leq \rangle$
x_2	$\langle 2, \leq \rangle$	$\langle -2, \leq \rangle$	$\langle \infty, \leq \rangle$	$\langle \infty, \leq \rangle$	x_2	$\langle 1, \leq \rangle$	$\langle -2, \leq \rangle$	$\langle 0, \leq \rangle$	$\langle 0, \leq \rangle$
x_3	$\langle 5, \leq \rangle$	$\langle 3, \leq \rangle$	$\langle 1, \leq \rangle$	$\langle \infty, \leq \rangle$	x_3	$\langle 2, \leq \rangle$	$\langle -1, \leq \rangle$	$\langle 1, \leq \rangle$	$\langle 0, \leq \rangle$

Reduced DBM:



]