

Fundamentals of Artificial Intelligence

Chapter 09: Inference in First-Order Logic

Roberto Sebastiani

DISI, Università di Trento, Italy – roberto.sebastiani@unitn.it
http://disi.unitn.it/rseba/DIDATTICA/fai_2021/

Teaching assistant: Mauro Dragoni – dragoni@fbk.eu
<http://www.maurodragoni.com/teaching/fai/>

M.S. Course “Artificial Intelligence Systems”, academic year 2021-2022

Last update: Monday 22nd November, 2021, 13:13

Copyright notice: Most examples and images displayed in the slides of this course are taken from [Russell & Norvig, “Artificial Intelligence, a Modern Approach”, 3rd ed., Pearson], including explicitly figures from the above-mentioned book, so that their copyright is detained by the authors. A few other material (text, figures, examples) is authored by (in alphabetical order): Pieter Abbeel, Bonnie J. Dorr, Anca Dragan, Dan Klein, Nikita Kitaev, Tom Lenaerts, Michela Milano, Dana Nau, Maria Simi, who detain its copyright.

These slides cannot be displayed in public without the permission of the author.

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 Forward & Backward Chaining for Definite FOL KBs
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

- 1 **Basic First-Order Reasoning**
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 Forward & Backward Chaining for Definite FOL KBs
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 Forward & Backward Chaining for Definite FOL KBs
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

Term/Subformula Substitutions

Notation

- **Substitution:** “ $\text{Subst}(\{e_1/e_2\}, e)$ ” or “ $e\{e_1/e_2\}$ ”:
the expression (term or formula) obtained by substituting every occurrence of e_1 with e_2 in e
 - e_1, e_2 either both terms (**term substitution**)
or both subformulas (**subformula substitution**)
 - e is either a term or a formula (only term for term substitution)
- **Examples:**
 - (t. sub.): $(y + 1 = 1 + y)\{y/S(x)\} \implies (S(x) + 1 = 1 + S(x))$
 - (s.f. sub.): $(\text{Even}(x) \vee \text{Odd}(x))\{\text{Even}(x)/\text{Odd}(S(x))\} \implies ((\text{Odd}(S(x)) \vee \text{Odd}(x)))$
- **Multiple substitution:** $e\{e_1/e_2, e_3/e_4\} \stackrel{\text{def}}{=} (e\{e_1/e_2\})\{e_3/e_4\}$
 - ex: $(P(x, y) \rightarrow Q(x, y))\{x/1, y/2\} \implies (P(1, 2) \rightarrow Q(1, 2))$
- If θ is a substitution list and e an expression (formula/term), then we denote the result of a substitution as $e\theta$
 - $e\emptyset = e$
 - $e(\theta_1\theta_2) = (e\theta_1)\theta_2$, denoted as $e\theta_1\theta_2$

Substitution with equivalent terms

Equal-term substitution rule

$$\frac{\Gamma \wedge (t_1 = t_2) \wedge \alpha}{\Gamma \wedge (t_1 = t_2) \wedge \alpha \wedge \alpha\{t_1/t_2\}}$$

- Ex: $(S(x) = x + 1) \wedge (0 \neq S(x)) \implies (S(x) = x + 1) \wedge (0 \neq S(x)) \wedge (0 \neq x + 1)$
- Preserves validity: $M(\Gamma \wedge (t_1 = t_2) \wedge \alpha \wedge \alpha\{t_1/t_2\}) = M(\Gamma \wedge (t_1 = t_2) \wedge \alpha)$
- α can be safely dropped from the result

Substitution with equivalent terms

Equal-term substitution rule

$$\frac{\Gamma \wedge (t_1 = t_2) \wedge \alpha}{\Gamma \wedge (t_1 = t_2) \wedge \alpha \wedge \alpha\{t_1/t_2\}}$$

- Ex: $(S(x) = x + 1) \wedge (0 \neq S(x)) \implies (S(x) = x + 1) \wedge (0 \neq S(x)) \wedge (0 \neq x + 1)$
- Preserves validity: $M(\Gamma \wedge (t_1 = t_2) \wedge \alpha \wedge \alpha\{t_1/t_2\}) = M(\Gamma \wedge (t_1 = t_2) \wedge \alpha)$
- α can be safely dropped from the result

Substitution with equivalent terms

Equal-term substitution rule

$$\frac{\Gamma \wedge (t_1 = t_2) \wedge \alpha}{\Gamma \wedge (t_1 = t_2) \wedge \alpha \wedge \alpha\{t_1/t_2\}}$$

- Ex: $(S(x) = x + 1) \wedge (0 \neq S(x)) \implies (S(x) = x + 1) \wedge (0 \neq S(x)) \wedge (0 \neq x + 1)$
- Preserves validity: $M(\Gamma \wedge (t_1 = t_2) \wedge \alpha \wedge \alpha\{t_1/t_2\}) = M(\Gamma \wedge (t_1 = t_2) \wedge \alpha)$
- α can be safely dropped from the result

Substitution with equivalent terms

Equal-term substitution rule

$$\frac{\Gamma \wedge (t_1 = t_2) \wedge \alpha}{\Gamma \wedge (t_1 = t_2) \wedge \alpha \wedge \alpha\{t_1/t_2\}}$$

- Ex: $(S(x) = x + 1) \wedge (0 \neq S(x)) \implies (S(x) = x + 1) \wedge (0 \neq S(x)) \wedge (0 \neq x + 1)$
- Preserves validity: $M(\Gamma \wedge (t_1 = t_2) \wedge \alpha \wedge \alpha\{t_1/t_2\}) = M(\Gamma \wedge (t_1 = t_2) \wedge \alpha)$
- α can be safely dropped from the result

Substitution with equivalent formulas

Equivalent-subformula substitution rule

$$\frac{\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha}{\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha \wedge \alpha\{\beta_1/\beta_2\}}$$

- Ex: $(Even(x) \leftrightarrow Odd(S(x))) \wedge (Even(x) \vee Odd(x)) \implies (Even(x) \leftrightarrow Odd(S(x))) \wedge (Even(x) \vee Odd(x)) \wedge (Odd(S(x)) \vee Odd(x))$
- Preserves validity: $M(\Gamma \wedge (\beta_1 = \beta_2) \wedge \alpha \wedge \alpha\{\beta_1/\beta_2\}) = M(\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha)$
- α can be safely dropped from the result

Substitution with equivalent formulas

Equivalent-subformula substitution rule

$$\frac{\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha}{\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha \wedge \alpha\{\beta_1/\beta_2\}}$$

- Ex: $(\text{Even}(x) \leftrightarrow \text{Odd}(S(x))) \wedge (\text{Even}(x) \vee \text{Odd}(x)) \implies (\text{Even}(x) \leftrightarrow \text{Odd}(S(x))) \wedge (\text{Even}(x) \vee \text{Odd}(x)) \wedge (\text{Odd}(S(x)) \vee \text{Odd}(x))$
- Preserves validity: $M(\Gamma \wedge (\beta_1 = \beta_2) \wedge \alpha \wedge \alpha\{\beta_1/\beta_2\}) = M(\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha)$
- α can be safely dropped from the result

Substitution with equivalent formulas

Equivalent-subformula substitution rule

$$\frac{\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha}{\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha \wedge \alpha\{\beta_1/\beta_2\}}$$

- Ex: $(\text{Even}(x) \leftrightarrow \text{Odd}(S(x))) \wedge (\text{Even}(x) \vee \text{Odd}(x)) \implies (\text{Even}(x) \leftrightarrow \text{Odd}(S(x))) \wedge (\text{Even}(x) \vee \text{Odd}(x)) \wedge (\text{Odd}(S(x)) \vee \text{Odd}(x))$
- Preserves validity: $M(\Gamma \wedge (\beta_1 = \beta_2) \wedge \alpha \wedge \alpha\{\beta_1/\beta_2\}) = M(\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha)$
- α can be safely dropped from the result

Substitution with equivalent formulas

Equivalent-subformula substitution rule

$$\frac{\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha}{\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha \wedge \alpha\{\beta_1/\beta_2\}}$$

- Ex: $(\text{Even}(x) \leftrightarrow \text{Odd}(S(x))) \wedge (\text{Even}(x) \vee \text{Odd}(x)) \implies (\text{Even}(x) \leftrightarrow \text{Odd}(S(x))) \wedge (\text{Even}(x) \vee \text{Odd}(x)) \wedge (\text{Odd}(S(x)) \vee \text{Odd}(x))$
- Preserves validity: $M(\Gamma \wedge (\beta_1 = \beta_2) \wedge \alpha \wedge \alpha\{\beta_1/\beta_2\}) = M(\Gamma \wedge (\beta_1 \leftrightarrow \beta_2) \wedge \alpha)$
- α can be safely dropped from the result

Universal Instantiation (UI)

- Every instantiation of a universally quantified-sentence is entailed by it:

$$\frac{\Gamma \wedge \forall x.\alpha}{\Gamma \wedge \forall x.\alpha \wedge \alpha\{x/t\}}$$

for every variable x and term t

- Ex: $\forall x.((King(x) \wedge Greedy(x)) \rightarrow Evil(x))$
 - $(King(John) \wedge Greedy(John)) \rightarrow Evil(John)$
 - $(King(Richard) \wedge Greedy(Richard)) \rightarrow Evil(Richard)$
 - $(King(Father(John)) \wedge Greedy(Father(John))) \rightarrow Evil(Father(John))$
 - $(King(Father(Father(John))) \wedge Greedy(Father(Father(John)))) \rightarrow Evil(Father(Father(John)))$
 - ...
- Preserves validity:
 $M(\Gamma \wedge \forall x.\alpha \wedge \alpha\{x/t\}) = M(\Gamma \wedge \forall x.\alpha)$

Existential Instantiation (EI)

- An existentially quantified-sentence can be substituted by one of its instantiation with a fresh constant:

$$\frac{\Gamma \wedge \exists x.\alpha}{\Gamma \wedge \alpha\{x/C\}}$$

for every variable x and for a “fresh” constant C , i.e. a constant **which does not appear in** $\Gamma \wedge \exists x.\alpha$

- C is a **Skolem constant**, EI subcase of **Skolemization** (see later)
- Intuition: if there is an object satisfying some condition, then we give a (new) name to it
- Ex: $\exists x.(Crown(x) \wedge OnHead(x, John))$
 - $(Crown(C) \wedge OnHead(C, John))$
 - given “There is a crown on John’s head”, I call “C” such crown
- **Preserves satisfiability** (aka preserves **inferential equivalence**)
 $M(\Gamma \wedge \alpha\{x/C\}) \neq \emptyset$ iff $M(\Gamma \wedge \exists x.\alpha) \neq \emptyset$
(i.e.. $(\Gamma \wedge \alpha\{x/C\}) \models \beta$ iff $(\Gamma \wedge \exists x.\alpha) \models \beta$, for every β)
- Example from math: $\exists x.(\frac{d(x^y)}{dy} = x^y)$, we call it “e” $\implies (\frac{d(e^y)}{dy} = e^y)$

Remarks

- **About Universal Instantiation:**

- UI can be applied several times to add new sentences;
- the new Γ is **logically equivalent** to the old Γ

- **About Existential Instantiation:**

- EI can be applied once to replace the existential sentence;
- the new Γ is **not equivalent** to the old,
- but is **(un)satisfiable iff the old Γ is (un)satisfiable**

\implies the new Γ can infer β iff the old Γ can infer β

Before applying UI or EI, sentences must be rewritten s.t. negations (even when implicit) must be pushed inside the quantifications:

- $\neg\forall x.\alpha \implies \exists x.\neg\alpha$

- $\neg\exists x.\alpha \implies \forall x.\neg\alpha$

- ex: $(\forall x.P(x) \rightarrow \neg\exists y.Q(y))$
 $\implies (\neg\forall x.P(x) \vee \neg\exists y.Q(y))$
 $\implies (\exists x.\neg P(x) \vee \forall y.\neg Q(y))$

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 Forward & Backward Chaining for Definite FOL KBs
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

Reduction to Propositional Inference (aka propositionalization))

- Idea: Given a FOL closed KB Γ and query α , **Convert $(\Gamma \wedge \neg\alpha)$ to PL**
 \implies use a PL SAT solver to check PL (un)satisfiability
- Trick:
 - replace variables with ground terms, creating all possible instantiations of quantified sentences
 - convert atomic sentences into propositional symbols
e.g. “King(John)” \implies “King_John”,
e.g. “Brother(John,Richard)” \implies “Brother_John-Richard”,
- Theorem: (Herbrand, 1930)
**If a ground sentence α is entailed by an FOL KB Γ ,
then it is entailed by a finite subset of the propositionalized KB Γ**
 \implies A ground sentence is entailed by the propositionalized Γ if it is entailed by original Γ
 \implies Every FOL Γ can be propositionalized s.t. to preserve entailment
- The vice-versa does not hold
 \implies works if α is entailed, loops if α is not entailed

Reduction to Propositional Inference: Example

- Suppose Γ contains only:

$\forall x.((King(x) \wedge Greedy(x)) \rightarrow Evil(x))$

$King(John)$

$Greedy(John)$

$Brother(Richard, John)$

- Instantiating the universal sentence in all possible ways:

$(King(John) \wedge Greedy(John)) \rightarrow Evil(John)$

$(King(Richard) \wedge Greedy(Richard)) \rightarrow Evil(Richard)$

$King(John)$

$Greedy(John)$

$Brother(Richard, John)$

- The new Γ is propositionalized:

$(King_John \wedge Greedy_John) \rightarrow Evil_John$

$(King_Richard \wedge Greedy_Richard) \rightarrow Evil_Richard$

$King_John$

$Greedy_John$

$Brother_Richard-John$

- $Evil_John$ entailed by new Γ ($Evil(John)$ entailed by old Γ)

Problems with Propositionalization

- Propositionalization generates lots of irrelevant sentences

produces irrelevant atoms like $\text{Greedy}(\text{Richard})$

$\forall x.((\text{King}(x) \wedge \text{Greedy}(x)) \rightarrow \text{Evil}(x))$

$\text{King}(\text{John})$

$\forall y. \text{Greedy}(y)$

$\text{Brother}(\text{Richard}, \text{John})$

\Rightarrow produces irrelevant atoms like $\text{Greedy}(\text{Richard})$

- With p k -ary predicates and n constants, $p \cdot n^k$ instantiations
- What happens with function symbols?

Problems with Propositionalization [cont.]

- Problem: nested function applications
 - e.g. $\text{Father}(\text{John})$, $\text{Father}(\text{Father}(\text{John}))$, $\text{Father}(\text{Father}(\text{Father}(\text{John})))$, ...
⇒ infinite instantiations
- Actual Trick: for $k = 0$ to ∞ , use terms of function nesting depth k
 - create propositionalized Γ by instantiating depth- k terms
 - if $\Gamma \models \alpha$, then will find a contradiction for some finite k
 - if $\Gamma \not\models \alpha$, may find a loop forever
- Theorem: (Turing, 1936), (Church, 1936):
Entailment in FOL is semidecidable
- Propositionalization not very efficient in general, and used only in very particular cases

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 Forward & Backward Chaining for Definite FOL KBs
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

Generalized Modus Ponens (GMP)

- “Lifted inference”: Combine PL inference with UI/EI

- Aristotle’s “Modus Ponens” syllogism:

“All men are mortal; Socrates is a man; thus Socrates is mortal.”

$$\frac{\text{Man}(\text{Socrates}) \quad \forall x.(\text{Man}(x) \rightarrow \text{Mortal}(x))}{\text{Mortal}(\text{Socrates})}$$

- Generalized Modus Ponens:

if exists a substitution θ s.t., for all $i \in 1..k$, $\alpha'_i\theta = \alpha_i\theta$, then

$$\frac{\alpha'_1, \alpha'_2, \dots, \alpha'_k, (\alpha_1 \wedge \alpha_2 \wedge \dots \wedge \alpha_k) \rightarrow \beta}{\beta\theta}$$

- all variables (implicitly) assumed as universally quantified
- θ substitutes (universally quantified) variables with terms
- Ex: using $\theta \stackrel{\text{def}}{=} \{x/\text{John}, y/\text{John}\}$ we can infer $\text{Evil}(\text{John})$ from:
 $\forall x.((\text{King}(x) \wedge \text{Greedy}(x)) \rightarrow \text{Evil}(x)), \text{King}(\text{John}), \forall y.\text{Greedy}(y)$
- GMP used w. KB of **definite clauses** (exactly one positive literal)
 - Used in **Prolog**, **Datalog**, **Production-rule systems**,...

Unification

- Unification: Given $\langle \alpha'_1, \alpha'_2, \dots, \alpha'_k \rangle$ and $\langle \alpha_1, \alpha_2, \dots, \alpha_k \rangle$, find a variable substitution θ s.t. $\alpha'_i\theta = \alpha_i\theta$, for all $i \in 1..k$
 - θ is called a **unifier** for $\langle \alpha'_1, \alpha'_2, \dots, \alpha'_k \rangle$ and $\langle \alpha_1, \alpha_2, \dots, \alpha_k \rangle$
 - $Unify(\alpha, \beta) = \theta$ iff $\alpha\theta = \beta\theta$

- Ex:

$Unify(Knows(John, x), Knows(John, Jane)) = \{x/Jane\}$

$Unify(Knows(John, x), Knows(y, OJ)) = \{x/OJ, y/John\}$

$Unify(Knows(John, x), Knows(y, Mother(y))) = \{y/John, x/Mother(John)\}$

$Unify(Knows(John, x), Knows(x, OJ)) = FAIL : x/?$

- Different (implicitly-universally-quantified) formulas should use different variables

⇒ (Standardizing apart): rename variables to avoid name clashes

$Unify(Knows(John, x_1), Knows(x_2, OJ)) = \{x_1/OBJ, x_2/John\}$

- $\{\forall x.\alpha, \forall x.\beta\} \iff \{\forall x_1.\alpha\{x/x_1\}, \forall x_2.\beta\{x/x_2\}\}$, s.t. x_1, x_2 new

Most-General Unifier (MGU)

- Unifiers are not unique
 - ex: $\text{Unify}(\text{Knows}(\text{John}, x), \text{Knows}(y, z))$
could return $\{y/\text{John}, x/z\}$ or $\{y/\text{John}, x/\text{John}, z/\text{John}\}$
- Given α, β , the unifier θ_1 is **more general** than the unifier θ_2 for α, β if exists θ_3 s.t. $\theta_2 = \theta_1\theta_3$
 - ex: $\{y/\text{John}, x/z\}$ more general than $\{y/\text{John}, x/\text{John}, z/\text{John}\}$:
 $\{y/\text{John}, x/\text{John}, z/\text{John}\} = \{y/\text{John}, x/z\}\{z/\text{John}\}$
- Theorem: **If exists an unifier for α, β , then exists a most general unifier (MGU) θ for α, β**
 - Ex: $\{y/\text{John}, x/z\}$ MGU for $\text{Knows}(\text{John}, x), \text{Knows}(y, z)$
 - Ex: an MGU is unique modulo variable renaming
- **UNIFY()** returns the MGU between two (lists of) formulas
 - efficiency optimizations based on predicate/term indexing techniques (see AIMA if interested)

The Procedure Unify

function UNIFY(x, y, θ) **returns** a substitution to make x and y identical

inputs: x , a variable, constant, list, or compound expression

y , a variable, constant, list, or compound expression

θ , the substitution built up so far (optional, defaults to empty)

if $\theta = \text{failure}$ **then return** failure

else if $x = y$ **then return** θ

else if VARIABLE?(x) **then return** UNIFY-VAR(x, y, θ)

else if VARIABLE?(y) **then return** UNIFY-VAR(y, x, θ)

else if COMPOUND?(x) **and** COMPOUND?(y) **then**

return UNIFY(x .ARGS, y .ARGS, UNIFY(x .OP, y .OP, θ))

else if LIST?(x) **and** LIST?(y) **then**

return UNIFY(x .REST, y .REST, UNIFY(x .FIRST, y .FIRST, θ))

else return failure

function UNIFY-VAR(var, x, θ) **returns** a substitution

if $\{var/val\} \in \theta$ **then return** UNIFY(val, x, θ)

else if $\{x/val\} \in \theta$ **then return** UNIFY(var, val, θ)

else if OCCUR-CHECK?(var, x) **then return** failure

else return add $\{var/x\}$ to θ

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 **Forward & Backward Chaining for Definite FOL KBs**
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 **Forward & Backward Chaining for Definite FOL KBs**
 - **Forward Chaining**
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

First-Order Definite Clauses & Datalog

- FOL **Definite Clauses**: clauses with exactly one positive literal
 - we omit universal quantifiers
 - ⇒ variables are (implicitly) universally quantified
 - we remove existential quantifiers by EI
 - ⇒ existentially-quantified variables are substituted by fresh constants
(here we assume no function symbol and no \exists under the scope of \forall , see later for general case)
- Represent **implications of atomic formulas**
 - Ex: $\forall x.((King(x) \wedge Greedy(x)) \rightarrow Evil(x))$
 - ⇒ $(\neg King(x) \vee \neg Greedy(x) \vee Evil(x))$
- Important subcase: **Datalog KBs**:
sets of FOL definite clauses without function symbols
 - can represent statements typically made in relational databases
 - makes inference much easier

Example (Datalog)

KB:

The law says that it is a crime for an American to sell weapons to hostile nations.

The country Nono, an enemy of America, has some missiles, and all of its missiles were sold to it by Colonel West, who is American.

Goal:

Prove that Colonel West is a criminal.

Example (Datalog) [cont.]

- it is a crime for an American to sell weapons to hostile nations:

$\forall x, y, z. ((American(x) \wedge Weapon(y) \wedge Hostile(z) \wedge Sells(x, y, z)) \rightarrow Criminal(x))$

$\implies \neg American(x) \vee \neg Weapon(y) \vee \neg Hostile(z) \vee \neg Sells(x, y, z) \vee Criminal(x)$

- Nono ... has some missiles

$\exists x. (Owns(Nono, x) \wedge Missile(x)) \implies Owns(Nono, M_1) \wedge Missile(M_1)$

- All of its missiles were sold to it by Colonel West

$\forall x. ((Missile(x) \wedge Owns(Nono, x)) \rightarrow Sells(West, x, Nono))$

$\implies \neg Missile(x) \vee \neg Owns(Nono, x) \vee Sells(West, x, Nono)$

- Missiles are weapons:

$\forall x. (Missile(x) \rightarrow Weapon(x)) \implies \neg Missile(x) \vee Weapon(x)$

- An enemy of America counts as “hostile”: $\forall x. (Enemy(x, America) \rightarrow Hostile(x))$

$\implies \neg Enemy(x, America) \vee Hostile(x)$

- West, who is American ...: $American(West)$

- The country Nono, an enemy of America ...: $Enemy(Nono, America)$

A (Very-Basic) Forward-Chaining Procedure

```
function FOL-FC-ASK( $KB, \alpha$ ) returns a substitution or false  
  inputs:  $KB$ , the knowledge base, a set of first-order definite clauses  
            $\alpha$ , the query, an atomic sentence  
  local variables:  $new$ , the new sentences inferred on each iteration  
  
  repeat until  $new$  is empty  
     $new \leftarrow \{ \}$   
    for each  $rule$  in  $KB$  do  
       $(p_1 \wedge \dots \wedge p_n \Rightarrow q) \leftarrow \text{STANDARDIZE-VARIABLES}(rule)$   
      for each  $\theta$  such that  $\text{SUBST}(\theta, p_1 \wedge \dots \wedge p_n) = \text{SUBST}(\theta, p'_1 \wedge \dots \wedge p'_n)$   
        for some  $p'_1, \dots, p'_n$  in  $KB$   
           $q' \leftarrow \text{SUBST}(\theta, q)$   
          if  $q'$  does not unify with some sentence already in  $KB$  or  $new$  then  
            add  $q'$  to  $new$   
             $\phi \leftarrow \text{UNIFY}(q', \alpha)$   
            if  $\phi$  is not fail then return  $\phi$   
    add  $new$  to  $KB$   
return false
```


Example of Forward Chaining

American(West), Missile(M1), Owns(Nono, M1), Enemy(Nono, America) $\forall x.(\text{Missile}(x) \rightarrow \text{Weapon}(x))$
 $\forall x.((\text{Missile}(x) \wedge \text{Owns}(\text{Nono}, x)) \rightarrow \text{Sells}(\text{West}, x, \text{Nono}))$ $\forall x.(\text{Enemy}(x, \text{America}) \rightarrow \text{Hostile}(x))$
 $\forall x, y, z.((\text{American}(x) \wedge \text{Weapon}(y) \wedge \text{Hostile}(z) \wedge \text{Sells}(x, y, z)) \rightarrow \text{Criminal}(x))$

American(West)


Missile(M1)

Owns(Nono, M1)

Enemy(Nono, America)


Example of Forward Chaining

$American(West)$, $Missile(M_1)$, $Owns(Nono, M_1)$, $Enemy(Nono, America)$ $\forall x.(Missile(x) \rightarrow Weapon(x))$
 $\forall x.((Missile(x) \wedge Owns(Nono, x)) \rightarrow Sells(West, x, Nono))$ $\forall x.(Enemy(x, America) \rightarrow Hostile(x))$
 $\forall x, y, z.((American(x) \wedge Weapon(y) \wedge Hostile(z) \wedge Sells(x, y, z)) \rightarrow Criminal(x))$

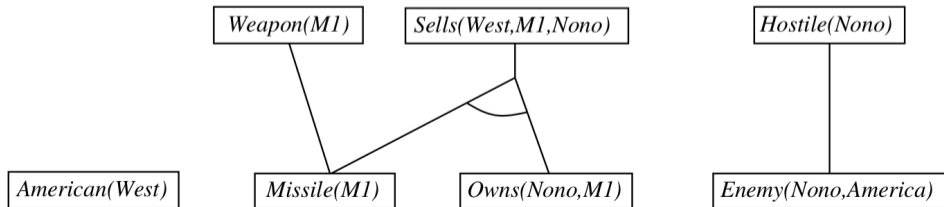

Example of Forward Chaining

$American(West)$, $Missile(M_1)$, $Owns(Nono, M_1)$, $Enemy(Nono, America) \forall x.(Missile(x) \rightarrow Weapon(x))$
 $\forall x.((Missile(x) \wedge Owns(Nono, x)) \rightarrow Sells(West, x, Nono)) \forall x.(Enemy(x, America) \rightarrow Hostile(x))$
 $\forall x, y, z.((American(x) \wedge Weapon(y) \wedge Hostile(z) \wedge Sells(x, y, z)) \rightarrow Criminal(x))$

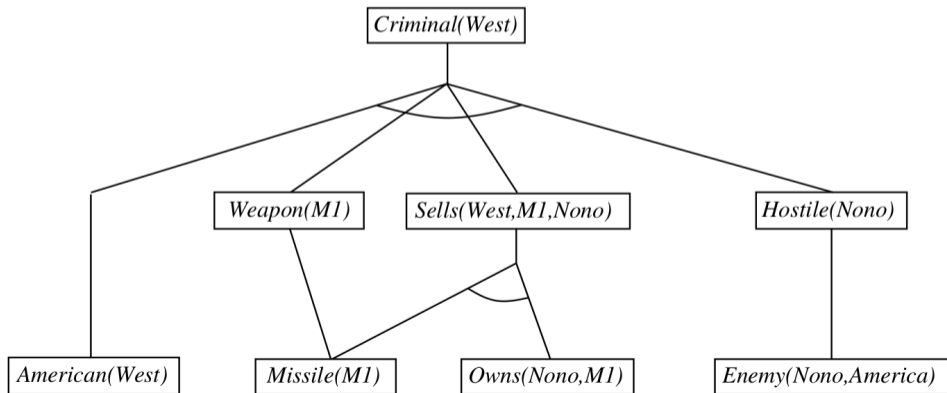


Properties of Forward Chaining

Intuition: at every loop, add all new atomic sentences you can infer by GMP, checking them against the goal

- **Sound**: every inference is just an application of GMP
- **Complete** (for definite KBs): answers every query entailed by KB
- if $KB \models \alpha$, it always terminates
- if $KB \not\models \alpha$, may not terminate (**Semi-decidable**)
- Solves always Datalog queries in time: $O(p \cdot n^k)$, s.t. $p = \#predicates$, $n = \#number\ constants$, $k = \#maximum\ arity$
- Improvement: no need to match a rule on iteration k if a premise wasn't added on iteration $k-1$
 - \implies match each rule whose premise contains a newly added literal
- **Matching can be expensive**
 - matching conjunctive premises against known facts is NP-hard
- Forward chaining is used in deductive databases and expert systems

Hard Matching Example

- `Colorable()` is inferred iff the CSP has solution \implies NP-Hard

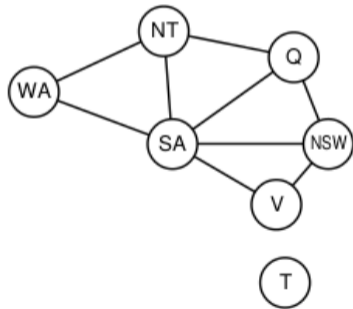

$$\begin{aligned} & Diff(wa, nt) \wedge Diff(wa, sa) \wedge \\ & Diff(nt, q) Diff(nt, sa) \wedge \\ & Diff(q, nsw) \wedge Diff(q, sa) \wedge \\ & Diff(nsw, v) \wedge Diff(nsw, sa) \wedge \\ & Diff(v, sa) \implies Colorable() \end{aligned}$$

$$\begin{aligned} & Diff(Red, Blue) \quad Diff(Red, Green) \\ & Diff(Green, Red) \quad Diff(Green, Blue) \\ & Diff(Blue, Red) \quad Diff(Blue, Green) \end{aligned}$$

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 **Forward & Backward Chaining for Definite FOL KBs**
 - Forward Chaining
 - **Backward Chaining**
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

A (Very-Basic) Backward-Chaining Procedure

```
function FOL-BC-ASK(KB, goals,  $\theta$ ) returns a set of substitutions
  inputs: KB, a knowledge base
            goals, a list of conjuncts forming a query ( $\theta$  already applied)
             $\theta$ , the current substitution, initially the empty substitution  $\{ \}$ 
  local variables: answers, a set of substitutions, initially empty

  if goals is empty then return  $\{ \theta \}$ 
   $q' \leftarrow$  SUBST( $\theta$ , FIRST(goals))
  for each sentence r in KB
    where STANDARDIZE-APART(r) = ( $p_1 \wedge \dots \wedge p_n \Rightarrow q$ )
    and  $\theta' \leftarrow$  UNIFY(q,  $q'$ ) succeeds
    new_goals  $\leftarrow$  [ $p_1, \dots, p_n$  | REST(goals)]
    answers  $\leftarrow$  FOL-BC-ASK(KB, new_goals, COMPOSE( $\theta'$ ,  $\theta$ ))  $\cup$  answers
  return answers
```

Backward Chaining: Example

American(West), Missile(M₁), Owns(Nono, M₁), Enemy(Nono, America)

$\forall x, y, z. ((\text{American}(x) \wedge \text{Weapon}(y) \wedge \text{Hostile}(z) \wedge \text{Sells}(x, y, z)) \rightarrow \text{Criminal}(x))$

$\forall x. (\text{Missile}(x) \rightarrow \text{Weapon}(x)) \quad \forall x. ((\text{Missile}(x) \wedge \text{Owns}(\text{Nono}, x)) \rightarrow \text{Sells}(\text{West}, x, \text{Nono}))$

$\forall x. (\text{Enemy}(x, \text{America}) \rightarrow \text{Hostile}(x))$

Criminal(West)


Backward Chaining: Example

$American(West)$, $Missile(M_1)$, $Owns(Nono, M_1)$, $Enemy(Nono, America)$

$\forall x, y, z. ((American(x) \wedge Weapon(y) \wedge Hostile(z) \wedge Sells(x, y, z)) \rightarrow Criminal(x))$

$\forall x. (Missile(x) \rightarrow Weapon(x)) \quad \forall x. ((Missile(x) \wedge Owns(Nono, x)) \rightarrow Sells(West, x, Nono))$

$\forall x. (Enemy(x, America) \rightarrow Hostile(x))$

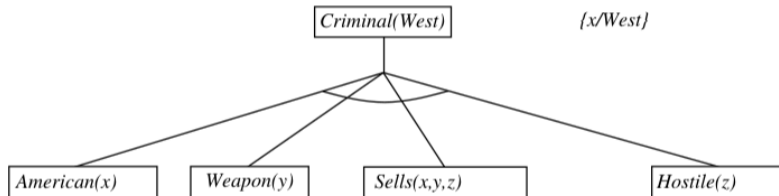


Backward Chaining: Example

American(West), *Missile(M₁)*, *Owns(Nono, M₁)*, *Enemy(Nono, America)*

$\forall x, y, z. ((\text{American}(x) \wedge \text{Weapon}(y) \wedge \text{Hostile}(z) \wedge \text{Sells}(x, y, z)) \rightarrow \text{Criminal}(x))$

$\forall x. (\text{Missile}(x) \rightarrow \text{Weapon}(x)) \quad \forall x. ((\text{Missile}(x) \wedge \text{Owns}(\text{Nono}, x)) \rightarrow \text{Sells}(\text{West}, x, \text{Nono}))$

$\forall x. (\text{Enemy}(x, \text{America}) \rightarrow \text{Hostile}(x))$

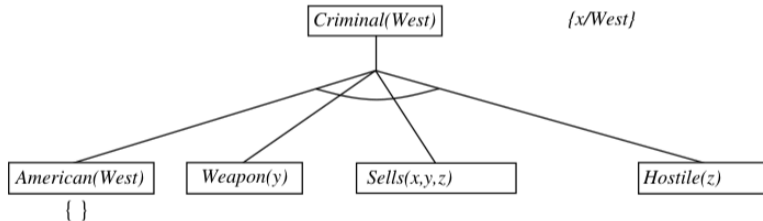


Backward Chaining: Example

$American(West)$, $Missile(M_1)$, $Owns(Nono, M_1)$, $Enemy(Nono, America)$

$\forall x, y, z. ((American(x) \wedge Weapon(y) \wedge Hostile(z) \wedge Sells(x, y, z)) \rightarrow Criminal(x))$

$\forall x. (Missile(x) \rightarrow Weapon(x))$ $\forall x. ((Missile(x) \wedge Owns(Nono, x)) \rightarrow Sells(West, x, Nono))$

$\forall x. (Enemy(x, America) \rightarrow Hostile(x))$

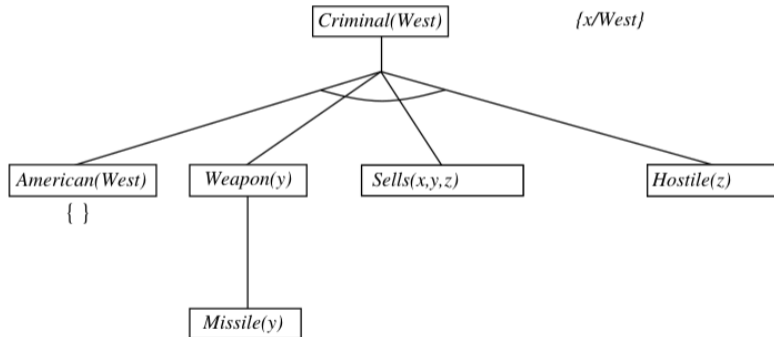


Backward Chaining: Example

$American(West)$, $Missile(M_1)$, $Owns(Nono, M_1)$, $Enemy(Nono, America)$

$\forall x, y, z. ((American(x) \wedge Weapon(y) \wedge Hostile(z) \wedge Sells(x, y, z)) \rightarrow Criminal(x))$

$\forall x. (Missile(x) \rightarrow Weapon(x)) \quad \forall x. ((Missile(x) \wedge Owns(Nono, x)) \rightarrow Sells(West, x, Nono))$

$\forall x. (Enemy(x, America) \rightarrow Hostile(x))$

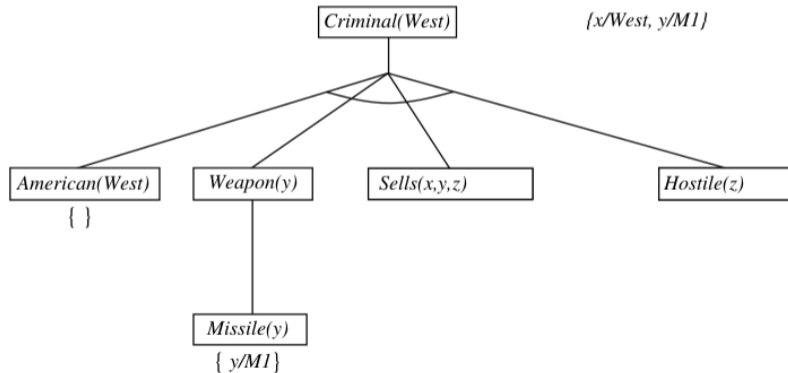


Backward Chaining: Example

$American(West)$, $Missile(M_1)$, $Owns(Nono, M_1)$, $Enemy(Nono, America)$

$\forall x, y, z. ((American(x) \wedge Weapon(y) \wedge Hostile(z) \wedge Sells(x, y, z)) \rightarrow Criminal(x))$

$\forall x. (Missile(x) \rightarrow Weapon(x)) \quad \forall x. ((Missile(x) \wedge Owns(Nono, x)) \rightarrow Sells(West, x, Nono))$

$\forall x. (Enemy(x, America) \rightarrow Hostile(x))$

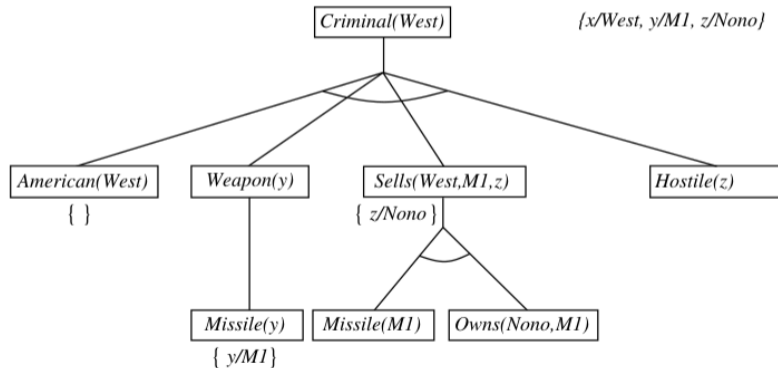


Backward Chaining: Example

$American(West)$, $Missile(M_1)$, $Owns(Nono, M_1)$, $Enemy(Nono, America)$

$\forall x, y, z. ((American(x) \wedge Weapon(y) \wedge Hostile(z) \wedge Sells(x, y, z)) \rightarrow Criminal(x))$

$\forall x. (Missile(x) \rightarrow Weapon(x)) \quad \forall x. ((Missile(x) \wedge Owns(Nono, x)) \rightarrow Sells(West, x, Nono))$

$\forall x. (Enemy(x, America) \rightarrow Hostile(x))$

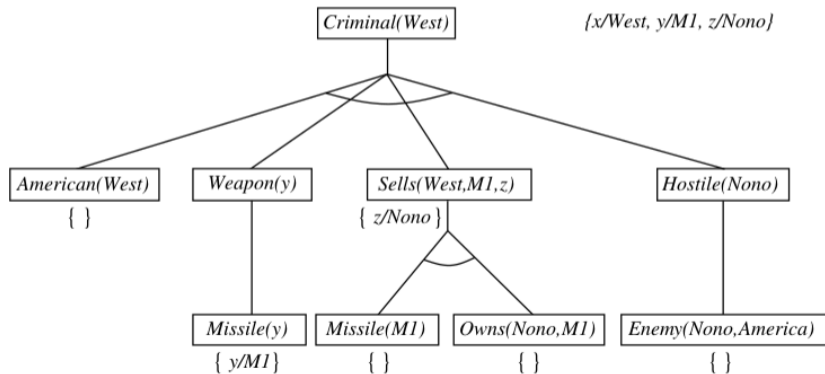

Properties of Backward Chaining

- Depth-first recursive proof search: space is linear in size of proof
- **Incomplete** due to infinite loops
 - e.g., $P(x) \rightarrow P(x) \implies P(c), P(c), P(c)\dots$ (easy to fix)
 - e.g., $Q(f(x)) \rightarrow Q(x) \implies Q(c), Q(f(c)), Q(f(f(c))))\dots$
- **Inefficient** due to repeated subgoals
 - fix using caching of previous results \implies need extra space!
- Widely used for **logic programming** (e.g. **prolog**)

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 Forward & Backward Chaining for Definite FOL KBs
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 Forward & Backward Chaining for Definite FOL KBs
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - **CNF-ization**
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

Conjunctive Normal Form (CNF)

- A FOL formula φ is in **Conjunctive normal form** iff it is a conjunction of disjunctions of quantifier-free literal:

$$\bigwedge_{i=1}^L \bigvee_{j=1}^{K_i} l_{ji}$$

- the disjunctions of literals $\bigvee_{j=1}^{K_i} l_{ji}$ are called **clauses**
 - every literal is a quantifier-free atom or its negation
 - free variables implicitly universally quantified
- Easier to handle: list of lists of literals.
 \implies no reasoning on the recursive structure of the formula
 - Ex: $\neg \text{Missile}(x) \vee \neg \text{Owns}(\text{Nono}, x) \vee \text{Sells}(\text{West}, x, \text{Nono})$

FOL CNF Conversion $CNF(\varphi)$

Convert into NNF

Every FOL formula φ can be reduced into CNF:

1 Eliminate implications and biconditionals:

$$\alpha \rightarrow \beta \implies \neg\alpha \vee \beta$$

$$\alpha \leftrightarrow \beta \implies (\neg\alpha \vee \beta) \wedge (\alpha \vee \neg\beta)$$

2 Push inwards negations recursively:

$$\neg(\alpha \wedge \beta) \implies \neg\alpha \vee \neg\beta$$

$$\neg(\alpha \vee \beta) \implies \neg\alpha \wedge \neg\beta$$

$$\neg\neg\alpha \implies \alpha$$

$$\neg\forall x.\alpha \implies \exists x.\neg\alpha$$

$$\neg\exists x.\alpha \implies \forall x.\neg\alpha$$

\implies **Negation normal form**: negations only in front of atomic formulae

\implies quantified subformulas occur only with positive polarity

FOL CNF Conversion $CNF(\varphi)$ [cont.]

Remove quantifiers

- 3 **Standardize variables:** each quantifier should use a different var
 $(\forall x.\exists y.\alpha) \wedge \exists y.\beta \wedge \forall x.\gamma \implies (\forall x.\exists y.\alpha) \wedge \exists y_1.\beta\{y/y_1\} \wedge \forall x_1.\gamma\{x/x_1\}$

- 4 **Skolemize** (a generalization of EI):

Each existential variable is replaced by a fresh **Skolem function** applied to the enclosing universally-quantified variables

$$\exists y.\alpha \implies \alpha\{y/c\}$$

$$\forall x.(...\exists y.\alpha...) \implies \forall x.(...\alpha\{y/F_1(x)\}...)$$

$$\forall x_1 x_2.(...\exists y.\alpha...) \implies \forall x_1 x_2.(...\alpha\{y/F_1(x_1, x_2)\}...)$$

$$\exists y_1 \forall x_1 x_2 \exists y_2 \forall x_3 \exists y_3.\alpha \implies \forall x_1 x_2 x_3.\alpha\{y_1/c, y_2/F_1(x_1, x_2), y_3/F_2(x_1, x_2, x_3)\}$$

Ex: $\forall x \exists y.Father(y, x) \implies \forall x.Father(s(x), x)$

($s(x)$ implicitly means "father of x " although $s()$ is a fresh function)

- 5 **Drop universal quantifiers:** $\forall x_1 \dots x_k.\alpha \implies \alpha$
 \implies free variables implicitly universally quantified

FOL CNF Conversion $CNF(\varphi)$ [cont.]

CNF-ize propositionally

- **CNF-ize propositionally** (see previous chapters):
either apply recursively the DeMorgan's Rule: $(\alpha \wedge \beta) \vee \gamma \implies (\alpha \vee \gamma) \wedge (\beta \vee \gamma)$
or rename subformulas and add definitions: $(\alpha \wedge \beta) \vee \gamma \implies (B \vee \gamma) \wedge CNF(B \leftrightarrow (\alpha \wedge \beta))$

- Preserves satisfiability: $M(\varphi) \neq \emptyset$ iff $M(CNF(\varphi)) \neq \emptyset$
 \implies Preserves entailment: $\varphi \models \alpha$ iff $CNF(\varphi) \models \alpha$ (in fact, $\varphi \wedge \neg \alpha$ unsat iff $\varphi \wedge \neg CNF(\alpha)$ unsat)

Conversion to CNF: Example

Consider: “Everyone who loves all animals is loved by someone”

$$\forall x.([\forall y.(Animal(y) \rightarrow Loves(x, y))] \rightarrow [\exists y.Loves(y, x)])$$

- 1 Eliminate implications and biconditionals:

$$\forall x.(\neg[\forall y.(\neg Animal(y) \vee Loves(x, y))] \vee [\exists y.Loves(y, x)])$$

- 2 Push inwards negations recursively

$$\forall x.([\exists y.\neg(\neg Animal(y) \vee Loves(x, y))] \vee [\exists y.Loves(y, x)])$$

$$\forall x.([\exists y.(\neg\neg Animal(y) \wedge \neg Loves(x, y))] \vee [\exists y.Loves(y, x)])$$

$$\forall x.([\exists y.(Animal(y) \wedge \neg Loves(x, y))] \vee [\exists y.Loves(y, x)])$$

- 3 Standardize variables:

$$\forall x.([\exists y.(Animal(y) \wedge \neg Loves(x, y))] \vee [\exists z.Loves(z, x)])$$

- 4 Skolemize:

$$\forall x.([Animal(F(x)) \wedge \neg Loves(x, F(x))] \vee [Loves(G(x), x)])$$

(F(x): “an animal unloved by x”; G(x): “someone who loves x”)

- 5 Drop universal quantifiers::

$$[Animal(F(x)) \wedge \neg Loves(x, F(x))] \vee [Loves(G(x), x)]$$

- 6 CNF-ize propositionally:

$$(Animal(F(x)) \vee Loves(G(x), x)) \wedge (\neg Loves(x, F(x)) \vee Loves(G(x), x))$$

Remark about Skolemization

Common mistake to avoid

- Do not

- apply Skolemization or
- drop universal quantifiers

before converting into NNF & standardize apart variables!

- Polarity of quantified subformulas affect Skolemization

⇒ NNF-ization may convert \exists 's into \forall 's, and vice versa

- Same-name quantified variable may cause errors

⇒ standardize variable may rename variables
(which, e.g., could be wrongly be Skolemized into the same function)

Remark about Skolemization: Example

Wrong CNF-ization

$$\forall x.([\forall y.(Animal(y) \rightarrow Loves(x, y))] \rightarrow [\exists y.Loves(y, x)])$$

- ❶ Too-early Skolemization & universal-quantifier dropping:

$$\forall x.([\forall y.(Animal(y) \rightarrow Loves(x, y))] \rightarrow [Loves(G(x), x)])$$

$$([\forall y.(Animal(y) \rightarrow Loves(x, y))] \rightarrow [Loves(G(x), x)])$$

- ❷ NNF-ization and CNF-ization $([(Animal(y) \wedge \neg Loves(x, y))] \vee [Loves(G(x), x)])$

$$((Animal(y) \vee Loves(G(x), x)) \wedge ((\neg Loves(x, y)) \vee Loves(G(x), x)))$$

“y” should be a Skolem function $F(x)$ instead

because “ $\forall y.(...)$ ” occurred negatively

\implies should become “ $\exists y.\neg(...)$ ”, and hence y Skolemized into $F(x)$

(compare with previous slide)

Exercise

Did Curiosity kill the cat?

Formalize and CNF-ize the following:

Everyone who loves all animals is loved by someone.

Anyone who kills an animal is loved by no one.

Jack loves all animals.

Either Jack or Curiosity killed the cat, who is named Tuna.

Did Curiosity kill the cat?

(See also AIMA book for FOL formalization and CNF-ization)

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 Forward & Backward Chaining for Definite FOL KBs
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - **Resolution**
 - Dealing with Equalities [hints]
 - A Complete Example

Resolution

- FOL resolution rule, let $\theta \stackrel{\text{def}}{=} mgu(l_i, \neg m_j)$, s.t. $l_i\theta = \neg m_j\theta$:

$$\frac{(l_1 \vee \dots \vee l_i \vee \dots \vee l_k) \quad (m_1 \vee \dots \vee m_j \vee \dots \vee m_n)}{(l_1 \vee \dots \vee l_{i-1} \vee l_{i+1} \vee \dots \vee l_k \vee m_1 \vee \dots \vee m_{j-1} \vee m_{j+1} \vee \dots \vee m_n)\theta}$$

- Ex:
$$\frac{\text{Man}(\text{Socrates}) \quad (\neg \text{Man}(x) \vee \text{Mortal}(x))}{\text{Mortal}(\text{Socrates})} \quad \text{s.t. } \theta \stackrel{\text{def}}{=} \{x/\text{Socrates}\}$$

- To prove that $\Gamma \models \alpha$ in FOL:

- convert $\Gamma \wedge \neg\alpha$ to CNF
- apply repeatedly resolution rule to $CNF(\Gamma \wedge \neg\alpha)$ until either
 - the empty clause is generated $\implies \Gamma \models \alpha$
 - no more resolution step is applicable $\implies \Gamma \not\models \alpha$
 - resource (time, memory) exhausted $\implies ??$
- Hint: apply resolution first to unit clauses (unit resolution)
 - unit resolution alone complete for definite clauses

- Complete:

- If there is a substitution θ such that $\Gamma \models \theta\alpha$, then it will return θ
- If there is no such θ , then the procedure may not terminate

- Many strategies and tools available

Example: Resolution with Definite Clauses

KB:

The law says that it is a crime for an American to sell weapons to hostile nations.

The country Nono, an enemy of America, has some missiles, and all of its missiles were sold to it by Colonel West, who is American.

Goal: Prove that Colonel West is a criminal.

Example: Resolution with Definite Clauses [cont.]

- it is a crime for an American to sell weapons to hostile nations:

$\forall x, y, z. ((American(x) \wedge Weapon(y) \wedge Hostile(z) \wedge Sells(x, y, z)) \rightarrow Criminal(x))$

$\implies \neg American(x) \vee \neg Weapon(y) \vee \neg Hostile(z) \vee \neg Sells(x, y, z) \vee Criminal(x)$

- Nono ... has some missiles

$\exists x. (Owns(Nono, x) \wedge Missile(x)) \implies Owns(Nono, M_1) \wedge Missile(M_1)$

- All of its missiles were sold to it by Colonel West

$\forall x. ((Missile(x) \wedge Owns(Nono, x)) \rightarrow Sells(West, x, Nono))$

$\implies \neg Missile(x) \vee \neg Owns(Nono, x) \vee Sells(West, x, Nono)$

- Missiles are weapons:

$\forall x. (Missile(x) \rightarrow Weapon(x)) \implies \neg Missile(x) \vee Weapon(x)$


- An enemy of America counts as "hostile": $\forall x. (Enemy(x, America) \rightarrow Hostile(x))$

$\implies \neg Enemy(x, America) \vee Hostile(x)$

- West, who is American ...: $American(West)$

- The country Nono, an enemy of America ...: $Enemy(Nono, America)$

Example: Resolution with Definite Clauses

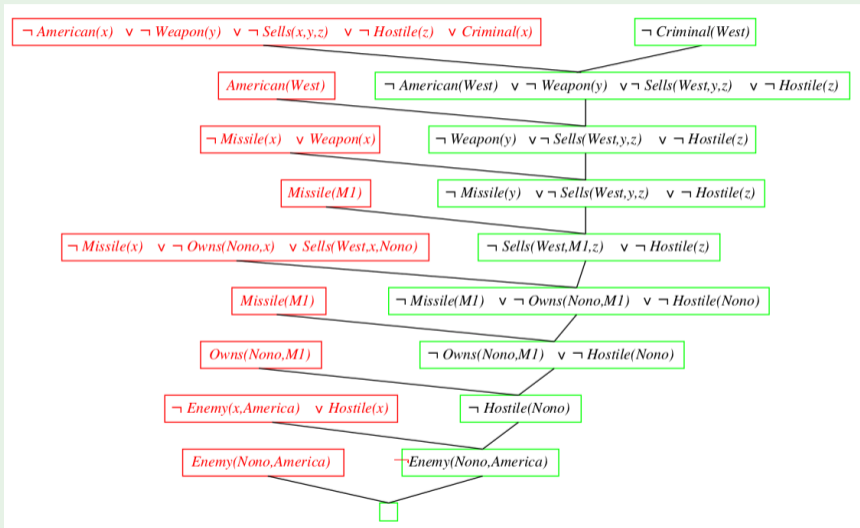

Example: Resolution with General Clauses

Everyone who loves all animals is loved by someone.


Anyone who kills an animal is loved by no one.

Jack loves all animals.

Either Jack or Curiosity killed the cat, who is named Tuna.

Did Curiosity kill the cat?

(See previous exercise or AIMA book for FOL formalization and CNF-ization.)

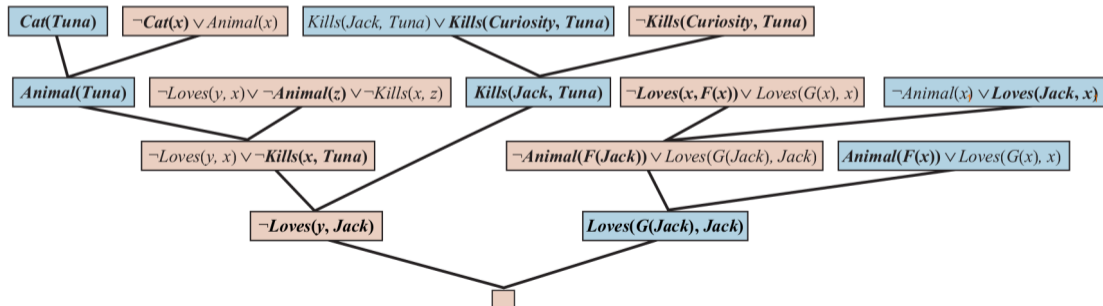

Resolution Strategies

Saturation Calculus:

- Given N_0 : set of (implicitly universally quantified) clauses.
- Derive $N_0, N_1, N_2, N_3, \dots$ s.t. $N_{i+1} = N_i \cup \{C\}$,
 - where C is the conclusion of a resolution step from premises in N_i
- (under reasonable restrictions) is **refutationally complete** :

$$N_0 \models \perp \implies \perp \in N_i \text{ for some } i$$

Problem

- The resolution rule is prolific.
 - it generates many useless intermediate results
 - it may generate the same clauses in many different ways
- This motivates the introduction of resolution restrictions.

Resolution Restrictions

Ordered resolution

- define stable atom ordering;
- resolve only maximal literals

Hyper-Resolution

- Clauses are divided into
 - “nuclei”: those with ≥ 1 negative literals
 - “electrons”: those with positive literals only
- Resolution can occur only among one **nucleus** and one **electron**

$$\text{Ex : } \frac{\frac{\neg P(x) \vee \neg Q(x) \vee R(x) \quad Q(A) \vee C}{\neg P(A) \vee R(A) \vee C} \quad P(A) \vee D}{R(A) \vee C \vee D}$$

- Multiple resolution steps are merged into one step

$$\text{Ex : } \frac{\neg P(x) \vee \neg Q(x) \vee R(x) \quad Q(A) \vee C \quad P(A) \vee D}{R(A) \vee C \vee D}$$

⇒ Globally, can produce only **electrons**

Exercise

- Solve the example of Colonel West using Hyper-Resolution strategy
- Solve the example of Curiosity & Tuna using Hyper-Resolution Strategy

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 Forward & Backward Chaining for Definite FOL KBs
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

Dealing with Term Equalities [hints.]

To deal with equality formulas ($t_1 = t_2$)

- Combine resolution with Equal-term substitution rule
- Ex:

$$(4 \geq 3) \frac{(S(x) = x + 1) \quad (\neg(y \geq z) \vee (S(y) \geq S(z)))}{(\neg(y \geq z) \vee (y + 1 \geq z + 1))} \\ 4 + 1 \geq 3 + 1$$

- Very inefficient
- Ad-hoc rules rule for equality: [Paramodulation](#)

Paramodulation

- Ground case:

$$\frac{D \vee (t = t') \quad C \vee L}{D \vee C \vee L\{t/t'\}} \quad \text{if } t, t' \text{ ground, } L \text{ literal}$$

- Example:

$$\frac{R(b) \vee (a = b) \quad Q(c) \vee P(a)}{R(b) \vee Q(c) \vee P(b)}$$

- General case:

$$\frac{D \vee (t = t') \quad C \vee L}{(D \vee C \vee L\{u/t'\})\theta} \quad \text{where } \theta \stackrel{\text{def}}{=} \text{mgu}(t, u)$$

- Examples:

$$\frac{R(b) \vee (a = b) \quad Q(c) \vee P(x)}{R(b) \vee Q(c) \vee P(b)} \quad \theta = \{x/a\}$$

$$\frac{R(g(c)) \vee (\overbrace{f(g(b))}^t = a) \quad Q(x) \vee P(g(\overbrace{f(x)})^u))}{R(g(c)) \vee Q(g(b)) \vee P(g(a))} \quad \theta = \{x/g(b)\}$$

Outline

- 1 Basic First-Order Reasoning
 - Substitutions & Instantiations
 - From Propositional to First-Order Reasoning
 - Unification and Lifting
- 2 Forward & Backward Chaining for Definite FOL KBs
 - Forward Chaining
 - Backward Chaining
- 3 Resolution for General FOL KBs
 - CNF-ization
 - Resolution
 - Dealing with Equalities [hints]
 - A Complete Example

Example

Problem

Consider the following FOL formula set Γ :

- 1 $\forall x. \{[\forall y. (\text{Child}(y) \rightarrow \text{Loves}(x, y))] \rightarrow [\exists y. \text{Loves}(y, x)]\}$
- 2 $\forall x. [\text{Child}(x) \rightarrow \text{Loves}(\text{Mark}, x)]$
- 3 $\text{Beats}(\text{Mark}, \text{Paul}) \vee \text{Beats}(\text{John}, \text{Paul})$
- 4 $\text{Child}(\text{Paul})$
- 5 $\forall x. \{[\exists z. (\text{Child}(z) \wedge \text{Beats}(x, z))] \rightarrow [\forall y. \neg \text{Loves}(y, x)]\}$

- (a) Compute the CNF-ization of Γ , Skolemize & standardize variables
- (b) Write a FOL-resolution inference of the query $\text{Beats}(\text{John}, \text{Paul})$ from the CNF-ized KB

Example

CNF-ization

(a) Compute the CNF-ization of Γ , Skolemize & standardize variables

- $\forall x. \{[\forall y. (\text{Child}(y) \rightarrow \text{Loves}(x, y))] \rightarrow [\exists y. \text{Loves}(y, x)]\}$
 $\forall x. \{[\neg \forall y. (\text{Child}(y) \rightarrow \text{Loves}(x, y))] \vee [\exists y. \text{Loves}(y, x)]\}$
 $\forall x. \{[\exists y. (\text{Child}(y) \wedge \neg \text{Loves}(x, y))] \vee [\exists y. \text{Loves}(y, x)]\}$
 $\{[(\text{Child}(F(x)) \wedge \neg \text{Loves}(x, F(x)))] \vee [\text{Loves}(G(x), x)]\}$
 - $\text{Child}(F(x)) \vee \text{Loves}(G(x), x)$
 - $\neg \text{Loves}(y, F(y)) \vee \text{Loves}(G(y), y)$
- $\neg \text{Child}(z) \vee \text{Loves}(\text{Mark}, z)$
- $\text{Beats}(\text{Mark}, \text{Paul}) \vee \text{Beats}(\text{John}, \text{Paul})$
- $\text{Child}(\text{Paul})$
- $\forall x. \{[\exists z. (\text{Child}(z) \wedge \text{Beats}(x, z))] \rightarrow [\forall y. \neg \text{Loves}(y, x)]\}$
 $\forall x. \{[\neg \exists z. (\text{Child}(z) \wedge \text{Beats}(x, z))] \vee [\forall y. \neg \text{Loves}(y, x)]\}$
 $\forall x. \{[\forall z. (\neg \text{Child}(z) \vee \neg \text{Beats}(x, z))] \vee [\forall y. \neg \text{Loves}(y, x)]\}$
 $\neg \text{Child}(z_2) \vee \neg \text{Beats}(x_2, z_2) \vee \neg \text{Loves}(y_2, x_2)$

where $F()$, $G()$ are Skolem unary functions.

Example

Resolution

(b) Write a FOL-resolution inference of the query $\text{Beats}(\text{John}, \text{Paul})$ from the CNF-ized KB:

⑥ $[1.2, 2.] \implies \neg \text{Child}(F(\text{Mark})) \vee \text{Loves}(G(\text{Mark}), \text{Mark});$

⑦ $[1.1, 6.] \implies \text{Loves}(G(\text{Mark}), \text{Mark});$

⑧ $[4, 5.] \implies \neg \text{Beats}(x_2, \text{Paul}) \vee \neg \text{Loves}(y_2, x_2);$

⑨ $[7, 8.] \implies \neg \text{Beats}(\text{Mark}, \text{Paul});$

⑩ $[3, 9.] \implies \text{Beats}(\text{John}, \text{Paul});$